

FAS ROUTE NO.	SEC	COUNTY	TOTAL SHEETS	SHEET NO.
-	*	STEPHENSON	14	2

ILLINOIS PROJECT BROS-0177(045)  
 \* 12-03120-00-BR  
 CONTRACT NO. 85587

## SCHEDULE OF QUANTITIES

### AGGREGATE SURFACE COURSE, TYPE B

LOCATION	TON
STA. 8+40 TO STA. 12+00	544
TOTAL	544 TON

### WOVEN WIRE FENCE (IDOT HIGHWAY STD. 665001-02)


LOCATION	FOOT
RT. STA. 10+28 TO RT. STA. 11+28	100
TOTAL	100 FOOT

### SEEDING, CLASS 2 (SPECIAL)

LOCATION	ACRE
LT. & RT. STA. 8+40 TO LT. & RT. STA. 12+00	0.35
TOTAL	0.35 ACRES


### EROSION CONTROL BLANKET

LOCATION	SQ YD
LT. & RT. STA. 8+40 TO LT. & RT. STA. 12+00	1567
TOTAL	1567 SQ YD

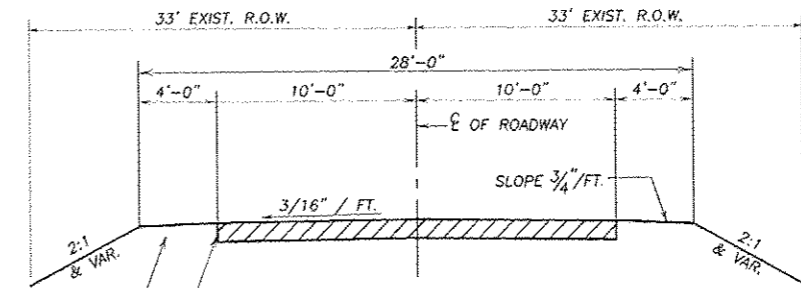

**PROPOSED TYPICAL SECTION**

\*\* THICKNESS SHOWN IS MINIMUM. MATCH EXISTING THICKNESS.

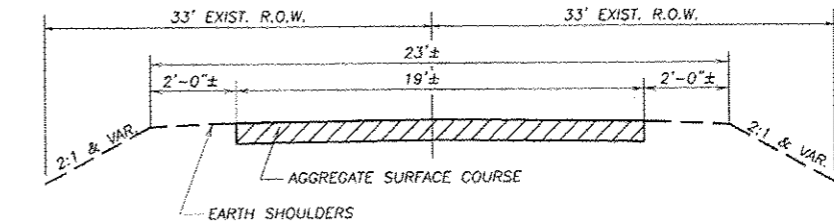

**EXISTING TYPICAL SECTION**

## SUMMARY OF QUANTITIES

CONSTRUCTION TYPE CODE: 0011

CODE NO.	ITEM	UNIT	TOTAL QUANTITY
20200100	EARTH EXCAVATION	CU YD	250
20400800	FURNISHED EXCAVATION	CU YD	50
20700220	POROUS GRANULAR EMBANKMENT	CU YD	40
25100630	EROSION CONTROL BLANKET	SQ YD	1567
28000400	PERIMETER EROSION BARRIER	FOOT	200
28100709	STONE DUMPED RIPRAP, CLASS A5	SQ YD	266
28200200	FILTER FABRIC	SQ YD	266
40200800	AGGREGATE SURFACE COURSE, TYPE B	TON	544
42001300	PROTECTIVE COAT	SQ YD	230
50100100	REMOVAL OF EXISTING STRUCTURES	EACH	1
50300225	CONCRETE STRUCTURES	CU YD	28.1
50300260	BRIDGE DECK GROOVING	SQ YD	187.2
50400505	PRECAST PRESTRESSED CONCRETE DECK BEAMS (27")	SQ FT	1685
50800205	REINFORCEMENT BARS, EPOXY COATED	POUND	6550
Δ 50901050	STEEL RAILING, TYPE SM	FOOT	124
51201600	FURNISHING STEEL PILES, HP 12X53	FOOT	350
51202305	DRIVING PILES	FOOT	350
51203600	TEST PILE STEEL HP 12X53	EACH	1
51500100	NAME PLATES	EACH	1
66500105	WOVEN WIRE FENCE 4'	FOOT	200
67100100	MOBILIZATION	L SUM	1
X2501000	SEEDING, CLASS 2 (SPECIAL)	ACRE	0.35
X5030305	CONCRETE WEARING SURFACE, 5"	SQ YD	187.2
X7010216	TRAFFIC CONTROL & PROTECTION, (SPECIAL)	L SUM	1

Δ SPECIALTY ITEMS

REVISIONS	DATE

DESIGNED BY:	
CHECKED BY:	
DATE:	
SCALE:	

**wendler**  
 GROUND-BREAKING SOLUTIONS  
 engineers - surveyors - scientists  
 www.wendlergs.com    ph: 615.283.2261  
 2800 Professional Design Firm No. 164-002628

SCHEDULE OF QUANTITIES  
 OF  
 REES ROAD  
 FOR  
 STEPHENSON COUNTY

SHEET TITLE  
 SCHEDULE OF QUANTITIES

JOB NUMBER  
 2120077

DATE  
 04/03/2013

SHEET NO.  
 2 of 14

SCHEDULE OF QUANTITIES  
 TYPICAL SECTIONS  
 SECTION 12-03120-00-BR  
 STEPHENSON COUNTY