FAS ROUTE NO	SEC	COUNTY	TOTAL SHEETS	SHEET NO
–	*	STEPHENSON	16	2

ILLINOIS PROJECT BROS-0177(044)

* 12-08122-00-BR
CONTRACT NO. 85590

SCHEDULE OF QUANTITIES

AGGREGATE SURFACE COURSE, TYPE B

LOCATION	TON
STA. 8+13 TO STA. 11+87	555
RT. STA. 11+57	39
TOTAL	594 TON

SEEDING, CLASS 2 (SPECIAL)

LOCATION	ACRE
LT. & RT. STA. 8+13 TO LT. & RT. STA. 11+87	0.35
TOTAL	0.35 ACRES

EROSION CONTROL BLANKET

LOCATION	SQ YD
LT. & RT. STA. 8+13 TO LT. & RT. STA. 11+87	1653
TOTAL	1653 SQ YD

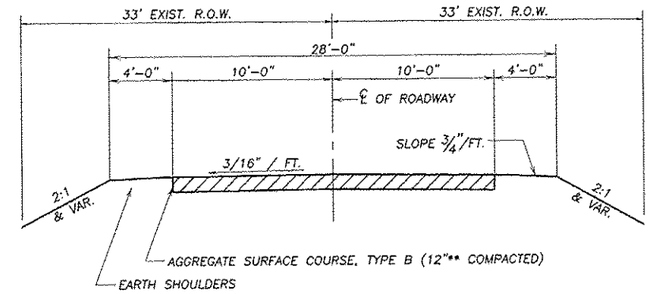

PROPOSED TYPICAL SECTION

** THICKNESS SHOWN IS MINIMUM. MATCH EXISTING THICKNESS.

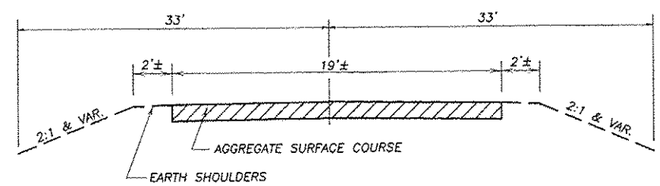

EXISTING TYPICAL SECTION

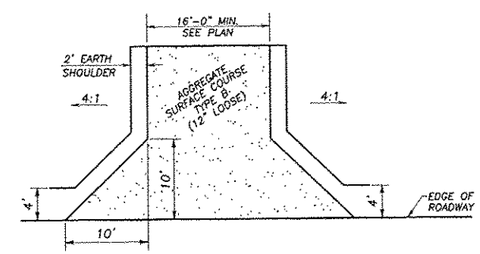

FIELD ENTRANCE DETAIL

SUMMARY OF QUANTITIES

CONSTRUCTION TYPE CODE : 0011

CODE NO.	ITEM	UNIT	TOTAL QUANTITY
20200100	EARTH EXCAVATION	CU YD	175
20400800	FURNISHED EXCAVATION	CU YD	275
20700220	POROUS GRANULAR EMBANKMENT	CU YD	55
25100630	EROSION CONTROL BLANKET	SQ YD	1653
28000400	PERIMETER EROSION BARRIER	FOOT	200
28100107	STONE RIPRAP, CLASS A4	SQ YD	311
28200200	FILTER FABRIC	SQ YD	336
40200800	AGGREGATE SURFACE COURSE, TYPE B	TON	594
42001300	PROTECTIVE COAT	SQ YD	281
50100100	REMOVAL OF EXISTING STRUCTURES	EACH	1
50300225	CONCRETE STRUCTURES	CU YD	29.2
50300260	BRIDGE DECK GROOVING	SQ YD	224.5
50400605	PRECAST PRESTRESSED CONCRETE DECK BEAMS (33" DEPTH)	SQ FT	2021
50800205	REINFORCEMENT BARS, EPOXY COATED	POUND	7150
△ 50901050	STEEL RAILING, TYPE SM	FOOT	146
51201600	FURNISHING STEEL PILES HP12X53	FOOT	555
51202305	DRIVING PILES	FOOT	555
51203600	TEST PILE STEEL HP12X53	EACH	2
51500100	NAME PLATES	EACH	1
67100100	MOBILIZATION	L SUM	1
X2501000	SEEDING, CLASS 2 (SPECIAL)	ACRE	0.35
X5030305	CONCRETE WEARING SURFACE, 5"	SQ YD	224.5
X7010216	TRAFFIC CONTROL AND PROTECTION, (SPECIAL)	L SUM	1

△ SPECIALTY ITEMS

SCHEDULE OF QUANTITIES
TYPICAL SECTIONS
SECTION 12-08122-00-BR
STEPHENSON COUNTY

SCALE: 1"=

REVISIONS

REVISION	DATE

DESIGNED BY: -
DRAWN BY: MAG
CHECKED BY: SCHD
SURVEYED BY: -
BOOK NO: -

wendler
GROUNDBREAKING SOLUTIONS
engineers · surveyors · scientists
www.wendlergs.com ph: 815.288.2261
Illinois Professional Design Firm No. 184-000849

SCHEDULE OF QUANTITIES
OF
DAMEIER ROAD
FOR
STEPHENSON COUNTY

SHEET TITLE
SCHEDULE OF QUANTITIES

JOB NUMBER 2120191

DATE 04/08/2013

SHEET NO.
2 of 16