

INDEX OF SHEETS

1	COVER SHEET
2	PLAN & PROFILE
3-4	CROSS SECTIONS
5-13	BRIDGE PLANS

STANDARDS: 280001-07 - EROSION CONTROL
515001-03 - NAME PLATE
701901-02 - TRAFFIC
BLR 21-9 - TRAFFIC
BLR 22-7 - TRAFFIC

STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION DIVISION OF HIGHWAYS PLANS FOR PROPOSED FEDERAL-AID HIGHWAY BRIDGE PROGRAM

T.R.493
WAYNE COUNTY
SECTION 06-15142-00-BR
STRUCTURE NO. 096-3457
PROJECT NO. BR0S-0191(065)
JOB NO. C-97-050-12

SUMMARY OF QUANTITIES

0.6	ACRE	SEEDING, CLASS 2 (SPECIAL)	X2501000
20	TON	AGGREGATE DITCH (SPECIAL)	X2830495
1	L SUM	TRAFFIC CONTROL AND PROTECTION, (SPECIAL)	X7010216
583	CU YD	DETOUR ROADWAY REMOVAL	Z0016700
1,333	SQ YD	SALVAGE AGGREGATE MATERIAL	XX003305
0.3	ACRE	TREE REMOVAL ACRES	20100500
367	CU YD	EARTH EXCAVATION	20200100
100	CU YD	CHANNEL EXCAVATION	20300100
922	CU YD	FURNISHED EXCAVATION	20400800
6	CU YD	TRENCH BACKFILL	20800150
60	FOOT	PERIMETER EROSION BARRIER	28000400
120	TON	STONE DUMPED RIPRAP, CLASS A4	28100807
454	TON	AGGREGATE BASE COURSE, TYPE B	35101400
230	TON	AGGREGATE SURFACE COURSE, TYPE B	40200800
1	EACH	REMOVE EXISTING STRUCTURES	50100100
32.2	CU YD	CONCRETE STRUCTURES	50300225
1,440	SQ FT	PRECAST PRESTRESSED CONCRETE DECK BEAMS (27" DEPTH)	50400505
3,290	POUND	REINFORCEMENT BARS	50800105
116	FOOT	STEEL RAILING, TYPE S1	50900205 Δ
495	FOOT	FURNISHING METAL SHELL PILES 12" X 0.250"	51200957
495	FOOT	DRIVING PILES	51202305
1	EACH	TEST PILE METAL SHELLS	51203200
1	EACH	NAME PLATES	51500100
36	FOOT	PIPE CULVERTS, CLASS D, TYPE 1 18"	542D0223
42	FOOT	PIPE CULVERTS, CLASS D, TYPE 1 24"	542D0229
50	FOOT	PIPE CULVERTS, CLASS D, TYPE 1 60"	542D0265
1	L SUM	MOBILIZATION	67100100

Δ SPECIALTY ITEMS

FUNCTIONAL CLASS: RURAL LOCAL ROAD


ADT = 50
DESIGN SPEED = 30MPH

CONTRACT NO. 95695

TOLL FREE JOINT UTILITY LOCATING
INFORMATION FOR EXCAVATORS (J.U.L.E.)
TELEPHONE NO. 1-800-892-0123 OR 811

PROFESSIONAL DESIGN FIRM #184-000832

PLAN 1 INCH = 50 FEET
PROFILE HORIZ. 1 INCH = 50 FEET
PROFILE VERT. 1 INCH = 10 FEET
CROSS SECTION 1 INCH = 5 FEET

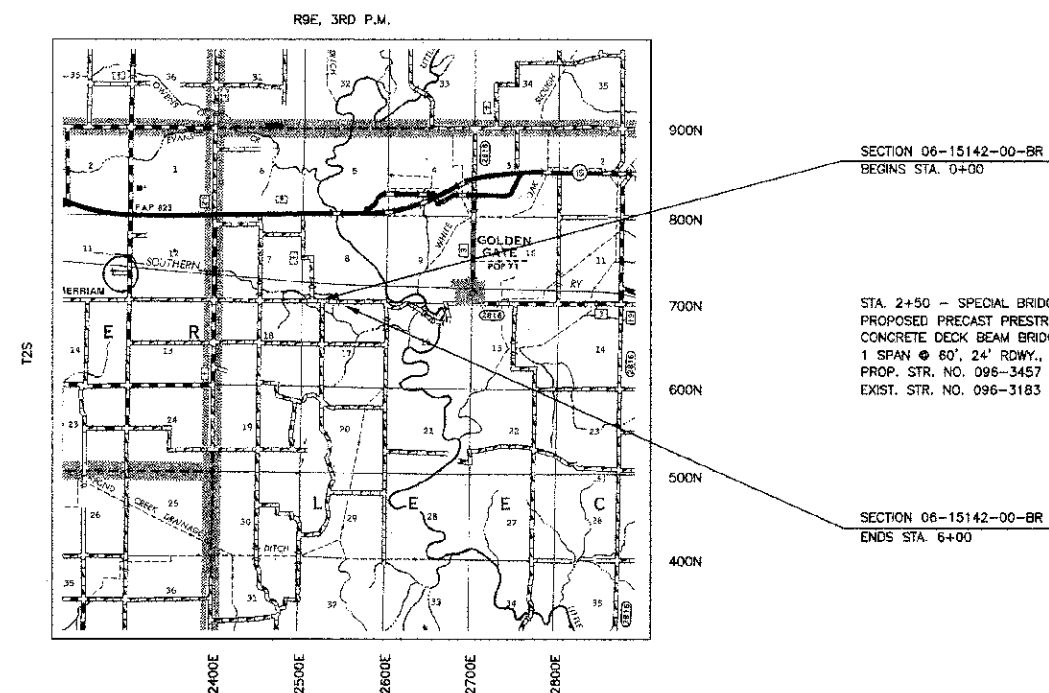

LOCATION MAP

APPROXIMATE SCALE: 1 INCH = 1 MILE
NET LENGTH = 600 L.F. = 0.11 MILES



ILLINOIS REGISTERED PROFESSIONAL ENGINEER # 55018
LICENSE EXPIRES NOVEMBER 30, 2013

ILLINOIS DEPARTMENT OF TRANSPORTATION	
APPROVED	11/28, 2012 <i>Wayne County Engineer</i>
PASSED	2/20, 2012 <i>District Seven Engineer</i>
RELEASING FOR BID BASED ON LIMITED REVIEW	
2/20, 2012 <i>Deputy Director of Highways</i>	