


LEGEND

- CONSTRUCTION WORK ZONE
- DIRECTION OF TRAFFIC
- TYPE II BARRICADES OR DRUMS
- CHANNELIZATION DRUM
- SIGN LOCATION
- TYPE III BARRICADE LOCATION
- FLASHING YELLOW LIGHT

DRUMS OR TYPE II BARRICADES WITH STEADY BURNING LIGHTS SPACED AT 25' C-C (TYP.)

NOTES

1. EXISTING LANE CONFIGURATIONS ARE TO REMAIN IN OPERATION DURING THIS STAGE OF CONSTRUCTION.
2. SEE CROSS SECTIONS FOR GRADING DETAILS.
3. GRADING OF THE FLAT AREA REQUIRED FOR THE PLACEMENT OF THE IMPACT ATTENUATOR AND TEMPORARY CONCRETE BARRIER SHALL BE INCLUDED IN THE CONTRACT UNIT PRICE FOR CURB REMOVAL.
4. SEE IDOT STANDARD DETAIL 643001, SAND MODULE IMPACT ATTENUATORS.

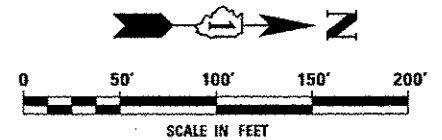

FILE NAME	USER NAME	DESIGNED	REVISED	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	MAINTENANCE OF TRAFFIC ILLINOIS ROUTE 59			F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
FILE#	USER#	NAV			338	2011-036-1	DUPAGE	234	27			
		DRAWN	REVISED		SCALE: AS SHOWN SHEET NO. 4 OF 8 SHEETS STA. 3955+00 TO STA. 3969+00			CONTRACT NO. 60P42		ILLINOIS FED. AID PROJECT		
		CHECKED	REVISED									
		DATE	REVISED									