

**PROPOSED LEGEND**

- ① CONTINUOUSLY REINFORCED PORTLAND CEMENT CONCRETE PAVEMENT 14" & PAVEMENT REINFORCEMENT, 14"
- ② STABILIZED SUB-BASE, 6" (BITUMINOUS AGGREGATE MIXTURE)
- ③ SUB-BASE GRANULAR MATERIAL, TYPE B 24"
- ④ GEOTECHNICAL FABRIC FOR GROUND STABILIZATION
- ⑤ CONCRETE MEDIAN SURFACE, 6 INCH (SPECIAL)
- ⑥ CONCRETE MEDIAN SURFACE, 6 INCH (SPECIAL) (WITHOUT STAMPED PATTERN)
- ⑦ COMBINATION CONCRETE CURB AND GUTTER, TYPE M-2.24
- ⑧ COMBINATION CONCRETE CURB AND GUTTER, TYPE M-4.24
- ⑨ COMBINATION CONCRETE CURB AND GUTTER, TYPE M-4.48
- ⑩ PORTLAND CEMENT CONCRETE SHOULDERS 14"
- ⑪ CONCRETE BARRIER, SINGLE FACE, 32 INCH HEIGHT; BARRIER BASE; BARRIER WALL MARKERS (PER IDOT STD. 635001 & 635006)
- ⑫ TRAFFIC BARRIER TERMINAL, TYPE VARIES
- ⑬ TOPSOIL FURNISH AND PLACE, 4"; SEEDING, CLASS 2A; EROSION CONTROL BLANKET
- ⑭ AGGREGATE FILL (INCLUDED IN THE COST OF "CONCRETE MEDIAN SURFACE, 6" (SPECIAL)") (MATCH DEPTH TO ADJACENT CURB & GUTTER)
- ⑮ CONCRETE BARRIER, SINGLE FACE, 42 INCH HEIGHT (SPECIAL); BARRIER BASE; CTA FENCE (SEE DETAILS); BARRIER WALL MARKERS (PER IDOT STD. 635001 & 635006)
- ⑯ PIPE UNDERDRAIN, 6" (SEE DETAILS)
- ⑰ TOPSOIL FURNISH AND PLACE, 12"; COMPOST FURNISH AND PLACE, 6"; EROSION CONTROL BLANKET; SEEDING (SEE PLAN FOR CLASS)
- ⑱ ELECTRICAL DUCTBANK (SEE ELECTRICAL INFRASTRUCTURE PLANS)
- ⑲ CONCRETE BARRIER, SINGLE FACE, 32 INCH HEIGHT (MODIFIED); BARRIER BASE; BARRIER WALL MARKERS (PER IDOT STD. 635001 & 635006)
- ⑳ PORTLAND CEMENT CONCRETE SHOULDERS 9"
- ㉑ 1 1/2" SHOULDER RESURFACING; BITUMINOUS CONCRETE SURFACE COURSE, SUPERPAVE, MIX "D", N70, 1 1/2"
- ㉒ 1 3/4" SHOULDER RESURFACING; BITUMINOUS CONCRETE SURFACE COURSE, SUPERPAVE, MIX "D", N70, 1 3/4"
- ㉓ 1 3/4" MAINLINE RESURFACING; POLYMERIZED BITUMINOUS CONCRETE SURFACE COURSE, SUPERPAVE, MIX "F", N105, 1 3/4"
- ㉔ 4" MAINLINE RESURFACING; POLYMERIZED BITUMINOUS CONCRETE SURFACE COURSE, SUPERPAVE, MIX "F", N105, 1 3/4"; POLYMERIZED BITUMINOUS CONCRETE BINDER COURSE, SUPERPAVE, IL-19, N105, 2 1/4"
- ㉕ PORTLAND CEMENT CONCRETE PAVEMENT, 14" (JOINTED)

**EXISTING LEGEND** ALL EXISTING PAVEMENT DEPTHS ARE FROM AS-BUILT PLANS AND ARE SUBJECT TO CHANGE

- (A) BIT CONC SURFACE COURSE, 1 1/2"±
- (B) BIT CONC BINDER COURSE, 1 1/2"±
- (C) BIT CONC BINDER COURSE, 4 3/4"±
- (D) SUB-BASE GRANULAR MATERIAL, 4"±
- (E) SUB-BASE GRANULAR MATERIAL, 6"±
- (F) CRUSHED STONE, 5"±
- (G) PCC SHOULDERS, 9"±
- (H) PCC BASE COURSE, 9"±
- (I) COMB CONC CURB & GUTTER
- (J) PCC PAVEMENT, 10"± (W/ PAVEMENT FABRIC, 80 LBS±/100 SF)
- (K) CONCRETE BARRIER WALL
- (L) PCC SHOULDERS, 11"±
- (M) CTA BALLAST STONE; REGRADE AS NECESSARY (INCLUDE REGRADING IN THE COST OF "CONCRETE BARRIER, SINGLE FACE, 42 INCH HEIGHT (SPECIAL)")
- (N) JOINTED PCC PAVEMENT, 11"±
- (O) STABILIZED SUB-BASE, 4"±
- (P) SUB-BASE GRANULAR MATERIAL, 24"±
- (Q) SUB-BASE GRANULAR MATERIAL, 12"±
- (R) PIPE UNDERDRAIN







**NOTES:**

1. REFER TO PAVEMENT JOINTING AND ELEVATION PLANS FOR DESCRIPTIONS AND DETAILS OF PAVEMENT JOINTS.
2. ANY REQUIRED REGRADING OF EXISTING ADJACENT SUB-BASE GRANULAR MATERIAL SHALL BE INCLUDED IN THE COST OF "SUB-BASE GRANULAR MATERIAL, TYPE B 24"

\* - VARYING DEPTH PAID FOR AS "SUB-BASE GRANULAR MATERIAL, TYPE B 24"

REVISIONS	
NAME	DATE

ILLINOIS DEPARTMENT OF TRANSPORTATION  
**F.A.I. 94 (DAN RYAN EXPRESSWAY)**  
**PROPOSED TYPICAL SECTIONS**  
**SB I-94 (DAN RYAN EXPRESSWAY)**  
**(SHEET 2 OF 2)**  
 SCALE: NONE      DRAWN BY: MPG  
 DATE: MARCH 1, 2006      CHECKED BY: TGB

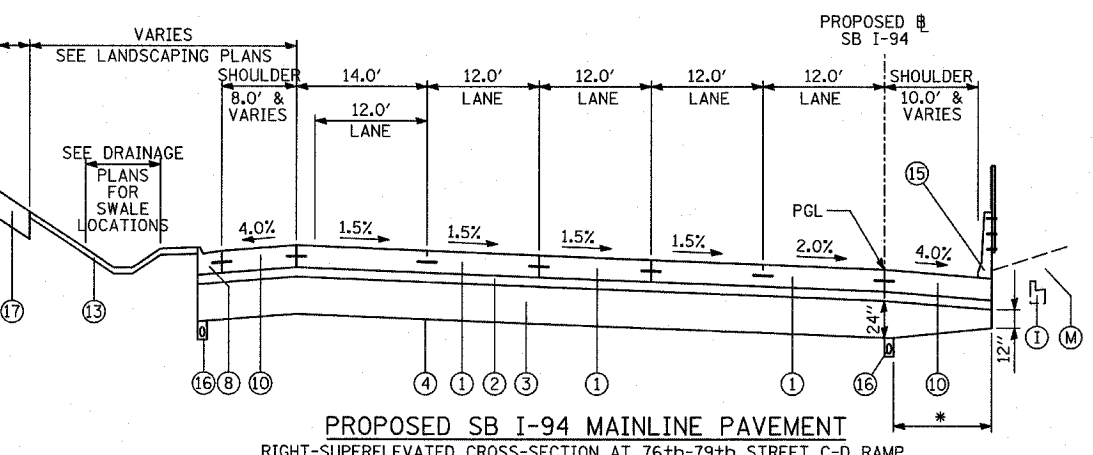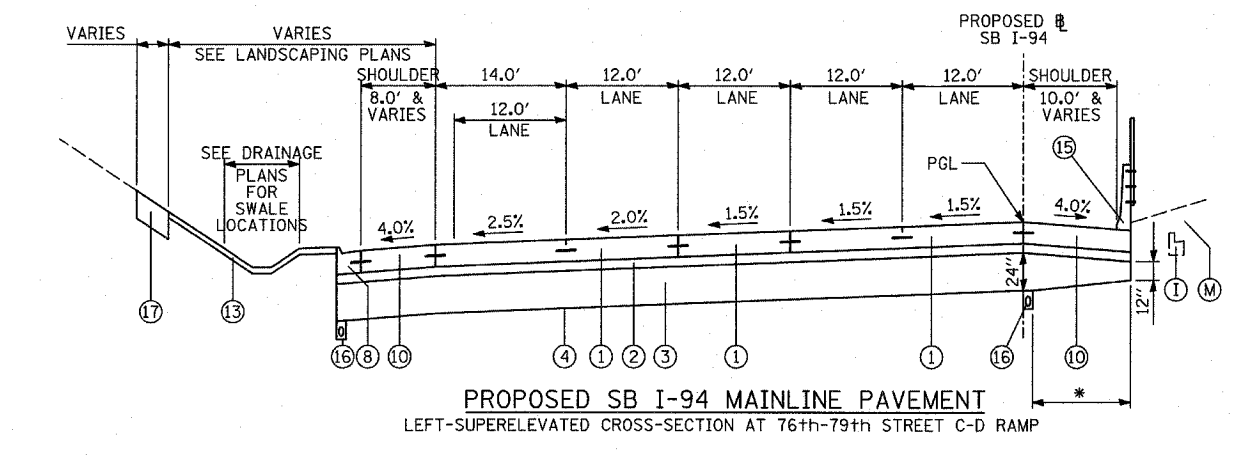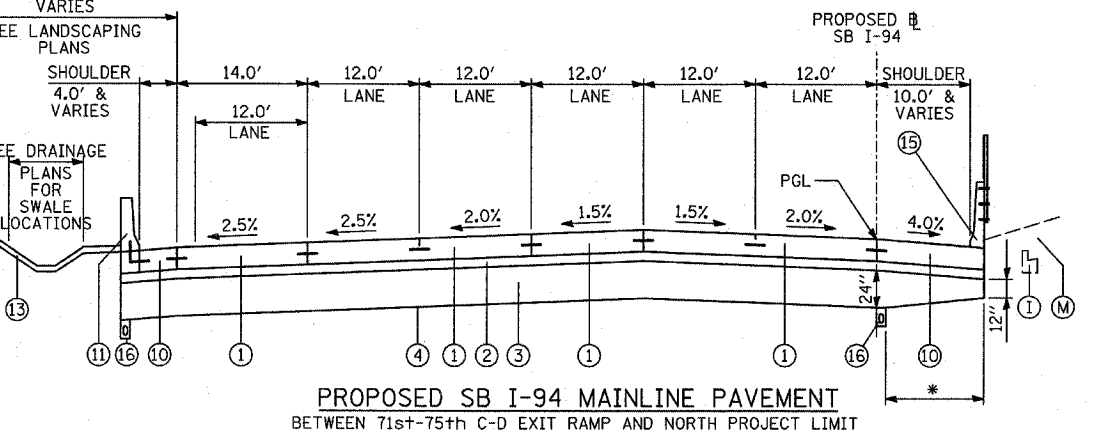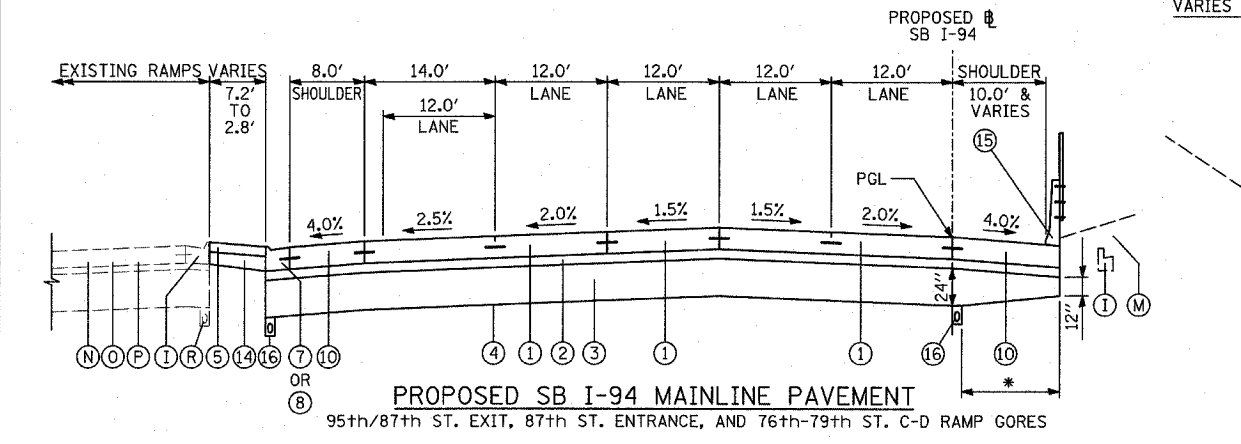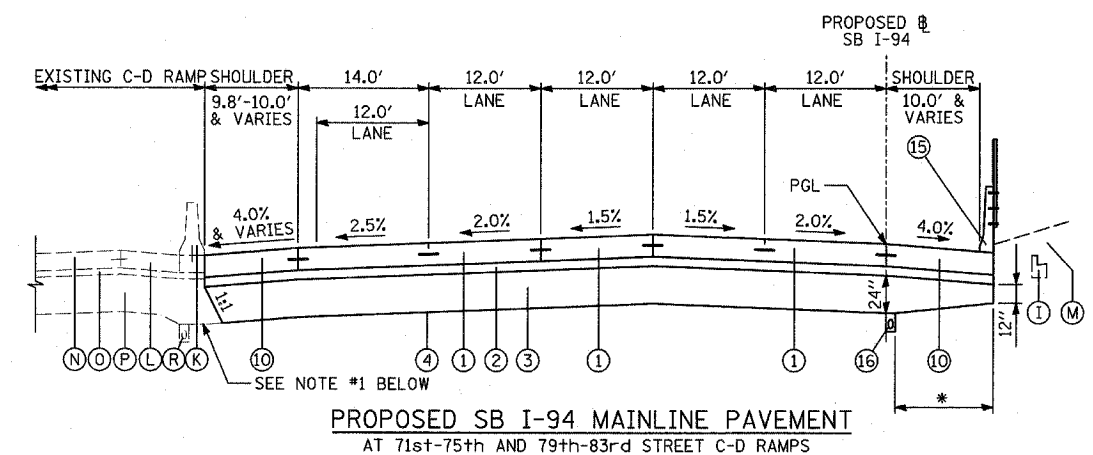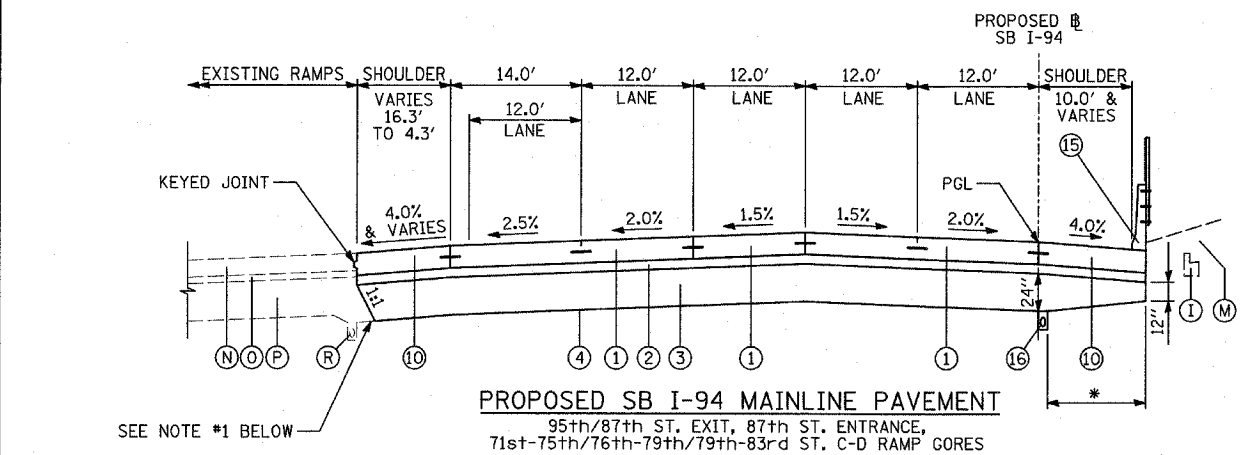

**TYLIN INTERNATIONAL**