F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
353	42 RS	COOK	31	5
STA.		TO STA.		
FED. ROAD DIST. NO. 1	ILLINOIS	FED. AID PROJECT		

CONTRACT NO. 60A86

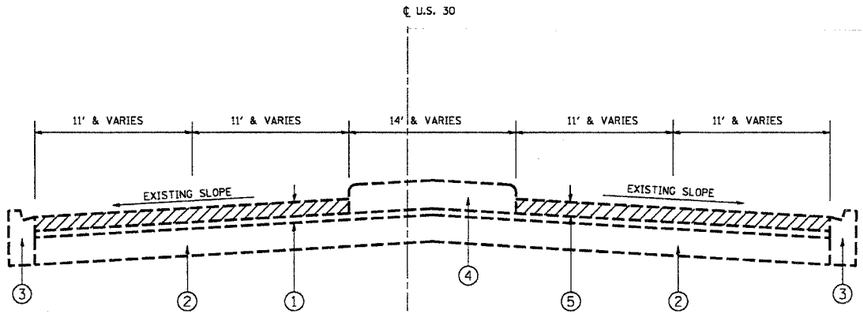

EXISTING TYPICAL SECTION
U.S. 30 (LINCOLN HWY).

STATION
464+39 TO 467+71
473+45 TO 483+13
486+97 TO 493+53

LEGEND

1. EXISTING HOT-MIX ASPHALT SURFACE COURSE, 3"(±)
2. EXISTING PCC BASE COURSE, 10"(±)
3. EXISTING COMBINATION CONC. CURB & GUTTER TYPE B.24
4. EXISTING CONCRETE BARRIER MEDIAN
5. HOT-MIX ASPHALT SURFACE REMOVAL - 2 1/2 "
6. PROPOSED POLYMERIZED HOT-MIX ASPHALT SURFACE COURSE, MIX "F", N90, 1 3/4 "
7. PROPOSED POLYMERIZED LEVELING BINDER (MM), IL-4.75, N50, 3/4 "

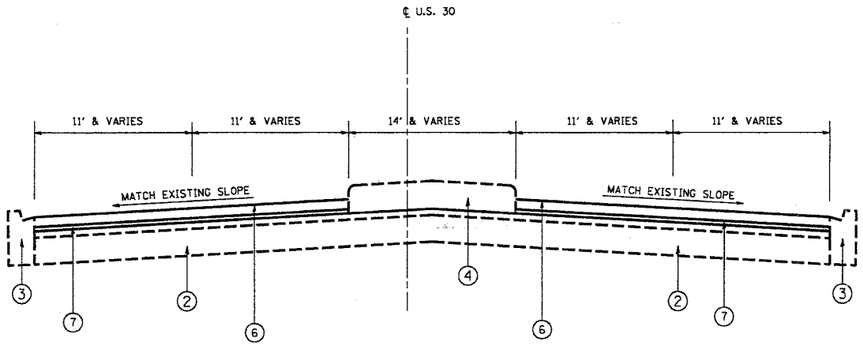

PROPOSED TYPICAL SECTION
U.S. 30 (LINCOLN HWY).

STATION
464+39 TO 467+71
473+45 TO 483+13
486+97 TO 493+53

REVISIONS NAME	DATE

ILLINOIS DEPARTMENT OF TRANSPORTATION

U.S. 30
EXISTING AND PROPOSED TYPICAL SECTIONS

SCALE: VERT.
HORIZ.
DATE

DRAWN BY
CHECKED BY

PLOT DATE = 12/28/2006
FILE NAME = c:\projects\d111806\design_aa.dgn
PLOT SCALE = 100.0024 '/ IN.
USER NAME = qureshiya