CONTRACT NO. 60B50

F.A.U. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
2722	3061 (A,B,&C) RS	COOK	25	5
STA.	TO STA.			
FED. ROAD DIST. NO.	ILLINOIS	FED. AID PROJECT		

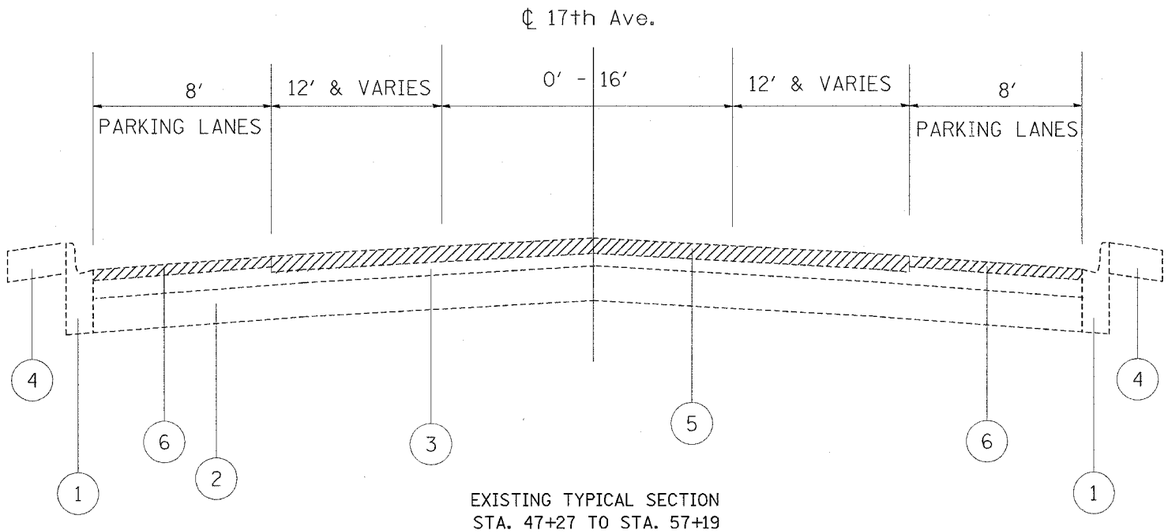

EXISTING TYPICAL SECTION
STA. 47+27 TO STA. 57+19

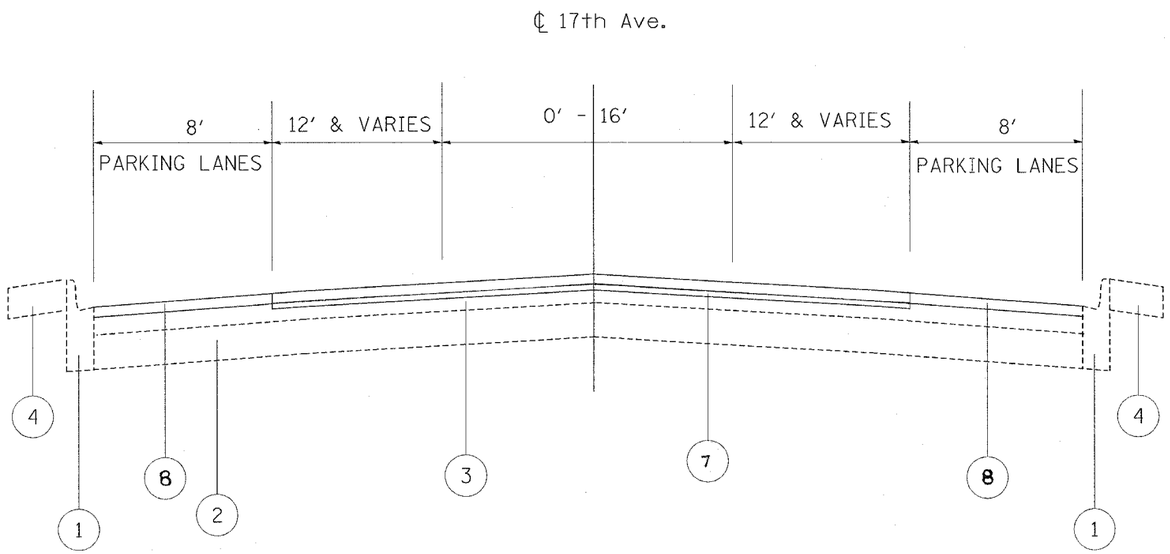

PROPOSED TYPICAL SECTION
STA. 47+27 TO STA. 57+19

LEGEND

1 EXIST. B6.12 CURB & GUTTER

2 EXIST. P.C.C. BASE COURSE 9" ±

3 EXIST. HOT MIX ASPHALT OVERLAY 4" ±

4 EXISTING SIDEWALK

5 PROPOSED HOT MIX ASPHALT SURFACE REMOVAL 2 1/2"

6 PROPOSED HOT MIX ASPHALT SURFACE REMOVAL, 1 1/2"

7 PROPOSED LEVELING BINDER (MACHINE METHOD), N70, 1

8 PROPOSED HOT MIX ASPHALT SURFACE COURSE, MIX "D", N70 (1 1/2")

PLOT DATE = 4/12/2007
FILE NAME = c:\projects\2007ap-rngn\17th_ave\design_aa.dgn
PLOT SCALE = 50.0000 ' / IN.
USER NAME = barks1

REVISIONS NAME	DATE

Rev.

ILLINOIS DEPARTMENT OF TRANSPORTATION

17th Avenue
I.C. R.R. to 31st Street
EXISTING AND PROPOSED
TYPICAL SECTIONS

SCALE: VERT.
HORIZ.
DATE

DRAWN BY
CHECKED BY