

TYPICAL CUT SECTION

TYPICAL FILL SECTION

TYPICAL PROPOSED CROSS SECTION

STA 18+50 TO STA 24+86
 STA 50+00 TO STA 58+00
 STA 400+00 TO STA 420+00
 STA 441+00 TO STA 442+75

BITUMINOUS SEAL COAT A-2 SCHEDULE


STA TO STA	BITUMINOUS MATERIALS PRIME	BITUMINOUS MATERIALS COVER & SEAL CT.	SEAL COAT AGGREGATE
18+50 TO 24+86	259 GAL	518 GAL	22 TON
400+00 TO 420+00	838 GAL	1676 GAL	70 TON
420+00 TO 441+00	879 GAL	1758 GAL	73 TON
441+00 TO 442+75	91 GAL	182 GAL	8 TON
58+00 TO 62+00	163 GAL	126 GAL	6 TON
58+00 A TO 62+00 A	165 GAL	330 GAL	14 TON
PARKING LOT 425+50	223 GAL	446 GAL	19 TON
TOTALS	2618 GAL	5036 GAL	212 TON

TREE REMOVAL, ACRES SCHEDULE

STA TO STA	QUANTITY
403+00 TO 409+00	0.3 ACRES
419+00 TO 421+00	0.1 ACRES
TOTALS	0.4 ACRES

EARTHWORK SUMMARY

STA TO STA	EARTH EXCAVATION	FURNISHED EXCAVATION
400+00 TO 420+00	889 CU.YD.	628 CU.YD.
420+00 TO 442+00	110 CU.YD.	588 CU.YD.
50+00 TO 58+00	21 CU.YD.	743 CU.YD.
58+00 TO 62+00	9 CU.YD.	1042 CU.YD.
58+00A TO 62+00A	8 CU.YD.	0 CU.YD.
TOTALS	1113 CU.YD.	3001 CU.YD.

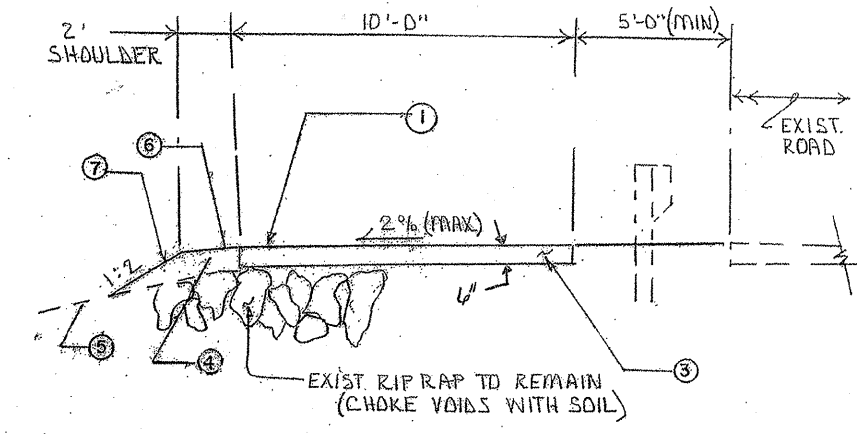

TYPICAL PROPOSED CROSS SECTION

*STA 420+00 TO STA 441+00

STA 58+00 TO STA 62+00

STA 58+00 A TO 62+00 A

*STA 433+00 TO STA 436+00 THE TRAIL SURFACE SHALL BE PORTLAND CEMENT CONCRETE SIDEWALK 5"

LEGEND

1. BITUMINOUS SURFACE COAT (A-2):
 BITUMINOUS MATERIALS (PRIME COAT; MC 30);
 2 LAYERS OF BITUMINOUS SEAL COAT (A-2) (HFE-150 AND CA-16 CRUSHED STONE)
2. EXISTING SUBGRADE
3. AGGREGATE BASE COURSE 6"
4. EARTH EXCAVATION & FURNISHED BORROW
5. EXISTING GROUND PROFILE
6. PROPOSED GROUND PROFILE
7. SEEDING CLASS 2 WITH MULCH METHOD 2 (**)

(**) STA. 50 + 00 TO STA. 62 + 00 SHALL BE SEEDED WITH A PRAIRIE MIX SEED. SEE THE CROSS SECTIONS AND SPECIAL PROVISIONS

CITY OF SHELBYVILLE ILLINOIS
 GENERAL DACEY TRAIL
 PHASE 4