F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
303	131B(1&2)BR	McHENRY	107	62
STA.		TO STA.		
FED. ROAD DIST. NO.	ILLINOIS	FED. AID PROJECT		

CONTRACT NO. 60B83

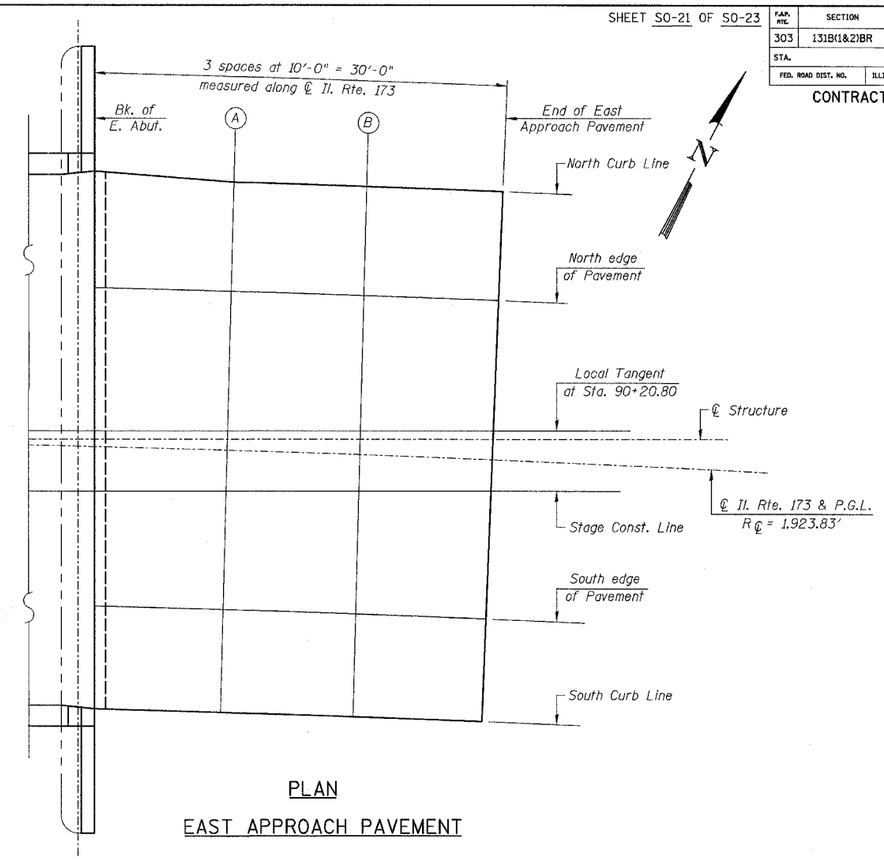

PLAN

EAST APPROACH PAVEMENT

NORTH CURB LINE

LOCATION	STATION	OFFSET	THEORETICAL GRADE ELEVATIONS	THEORETICAL GRADE ELEVATIONS ADJUSTED FOR DEAD LOAD DEFLECTIONS
BACK OF EAST ABUT.	90+67.05	-20.70	876.31	876.31
A	90+77.05	-20.00	876.33	876.33
B	90+87.05	-20.00	876.38	876.38
END E. APPR. PAV'T	90+97.05	-20.00	876.43	876.43

NORTH EDGE OF PAVEMENT

LOCATION	STATION	OFFSET	THEORETICAL GRADE ELEVATIONS	THEORETICAL GRADE ELEVATIONS ADJUSTED FOR DEAD LOAD DEFLECTIONS
BACK OF EAST ABUT.	90+67.05	-12.00	876.01	876.01
A	90+77.05	-12.00	876.06	876.06
B	90+87.05	-12.00	876.11	876.11
END E. APPR. PAV'T	90+97.05	-12.00	876.16	876.16

CL ROADWAY & P.G.L.

LOCATION	STATION	OFFSET	THEORETICAL GRADE ELEVATIONS	THEORETICAL GRADE ELEVATIONS ADJUSTED FOR DEAD LOAD DEFLECTIONS
BACK OF EAST ABUT.	90+67.05	0.00	875.59	875.59
A	90+77.05	0.00	875.64	875.64
B	90+87.05	0.00	875.69	875.69
END E. APPR. PAV'T	90+97.05	0.00	875.74	875.74

STAGE CONSTRUCTION LINE

LOCATION	STATION	OFFSET	THEORETICAL GRADE ELEVATIONS	THEORETICAL GRADE ELEVATIONS ADJUSTED FOR DEAD LOAD DEFLECTIONS
BACK OF EAST ABUT.	90+67.05	3.59	875.47	875.47
A	90+77.05	3.33	875.53	875.53
B	90+87.05	3.01	875.59	875.59
END E. APPR. PAV'T	90+97.05	2.64	875.65	875.65

SOUTH EDGE OF PAVEMENT

LOCATION	STATION	OFFSET	THEORETICAL GRADE ELEVATIONS	THEORETICAL GRADE ELEVATIONS ADJUSTED FOR DEAD LOAD DEFLECTIONS
BACK OF EAST ABUT.	90+67.05	12.00	875.18	875.18
A	90+77.05	12.00	875.23	875.23
B	90+87.05	12.00	875.28	875.28
END E. APPR. PAV'T	90+97.05	12.00	875.33	875.33

SOUTH CURB LINE

LOCATION	STATION	OFFSET	THEORETICAL GRADE ELEVATIONS	THEORETICAL GRADE ELEVATIONS ADJUSTED FOR DEAD LOAD DEFLECTIONS
BACK OF EAST ABUT.	90+67.05	20.14	874.90	874.90
A	90+77.05	20.00	874.95	874.95
B	90+87.05	20.00	875.00	875.00
END E. APPR. PAV'T	90+97.05	20.00	875.05	875.05

REVISIONS	
NAME	DATE

ILLINOIS DEPARTMENT OF TRANSPORTATION

EAST APPROACH PAVEMENT-ELEVATIONS

IL. RTE. 173 OVER

PISCASAW CREEK OVERFLOW

F.A.P. RTE. 303 SECTION: 131B(1&2)BR

McHENRY COUNTY STATION 90+20.80

STRUCTURE NO. 056-0089

SCALE:

DATE: APRIL 13, 2007

DRAWN BY: D.L./F.M.

CHECKED BY: B.N.S./J.C.N.

CHRISTIAN-ROGE & ASSOC., INC.

CHICAGO ILLINOIS