F. A. P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
846	(4,4R,&5) RS-7	WILL	35	5
STA. +		TO STA. +		
FED. ROAD DIST. NO. 3	ILLINOIS	FED. AID PROJECT		

CONTRACT NO.: 62364

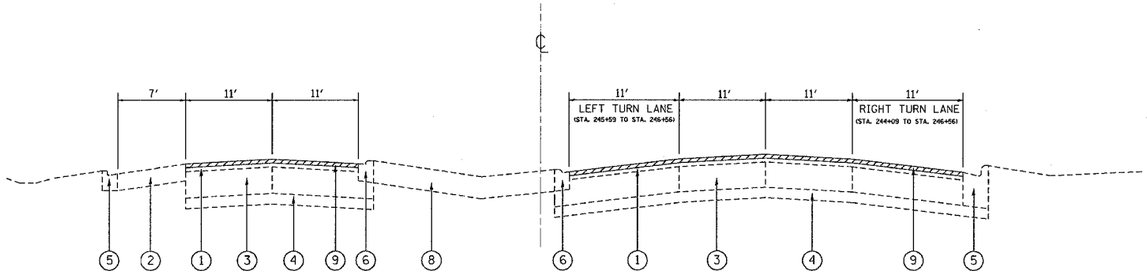

EXISTING TYPICAL CROSS SECTION
STA. 244+09 TO 246+95

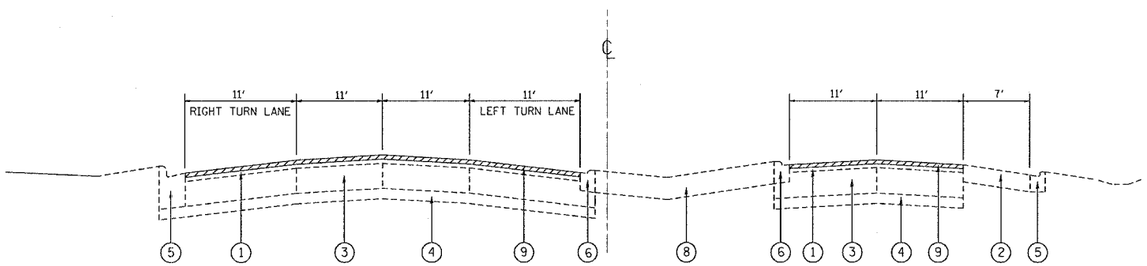

EXISTING TYPICAL CROSS SECTION
STA. 247+52 TO STA. 250+48

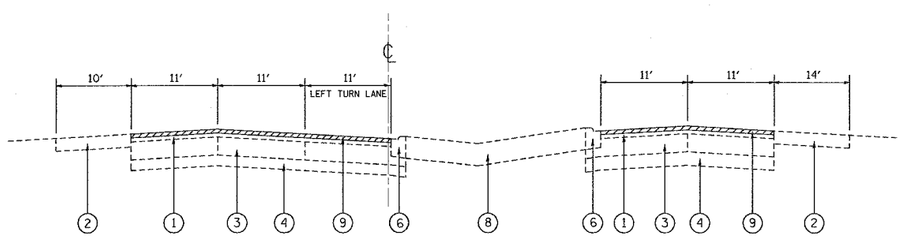

EXISTING TYPICAL CROSS SECTION
STA. 251+14 TO STA. 253+98
STA. 258+35 TO STA. 261+20

LEGEND:

1. EXISTING HOT-MIX ASPHALT SURFACE, 3″
2. EXISTING HOT-MIX ASPHALT SHOULDER, 8″
3. EXISTING P.C.C. PAVEMENT, 10″
4. EXISTING STABILIZED SUB-BASE
5. EXISTING COMBINATION CONCRETE CURB AND GUTTER, TYPE B-6.12
6. EXISTING COMBINATION CONCRETE CURB AND GUTTER, TYPE M-2.12
7. EXISTING GRASS MEDIAN
8. EXISTING HOT-MIX ASPHALT MEDIAN
9. PROPOSED HOT-MIX ASPHALT SURFACE REMOVAL, 2¼″
10. PROPOSED POLYMERIZED LEVELING BINDER (MACHINE METHOD), SUPERPAVE, IL-4.75, ¾″
11. PROPOSED HOT-MIX ASPHALT SURFACE COURSE, SUPERPAVE, MIX ″D″, N70, 1½″
12. PROPOSED HOT-MIX ASPHALT BINDER COURSE, IL-19.0, N70, 5¾″
13. PROPOSED GRADING AND SHAPING SHOULDERS
14. PROPOSED AGGREGATE SHOULDERS, TYPE B

REVISIONS	
NAME	DATE

ILLINOIS DEPARTMENT OF TRANSPORTATION

TYPICAL SECTIONS

F.A.P. 846/IL 53 (CHICAGO ST.)

MANHATTAN RD. TO OLD ELM RD.

SCALE: VERT. HORIZ. 1″=50′

DATE 5/2/2007

DRAWN BY: P. STEED

CHECKED BY

5/2/2007
c:\projects\d100202\d100202aa.m32
*REF-
*REF-
V1=