




PROPOSED TYPICAL SECTION
 NORTHBOUND LANE 12' TO 14' TRANSITION
 STA 910+05.7 TO STA 914+05.3
 (STA 4048+05.4 TO STA 4052+03.4)

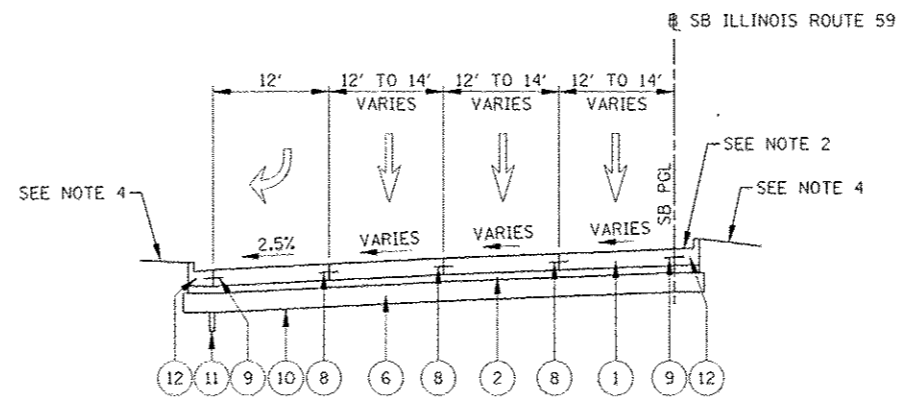

PROPOSED TYPICAL SECTION
 SOUTHBOUND LANE 12' TO 14' TRANSITION
 STA 811+18 TO STA 813+81.4
 (STA 4049+18.3 TO STA 4051+82.6)

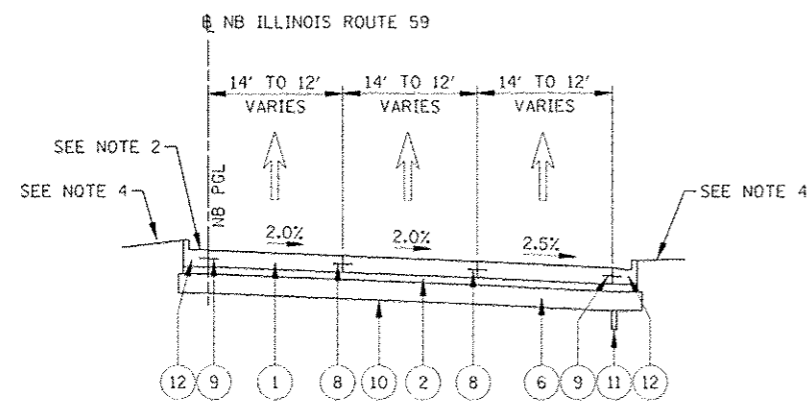

PROPOSED TYPICAL SECTION
 NORTHBOUND LANE 14' TO 12' TRANSITION
 STA 927+12.4 TO STA 930+10.8
 (STA 4064+88.1 TO STA 4067+85.9)

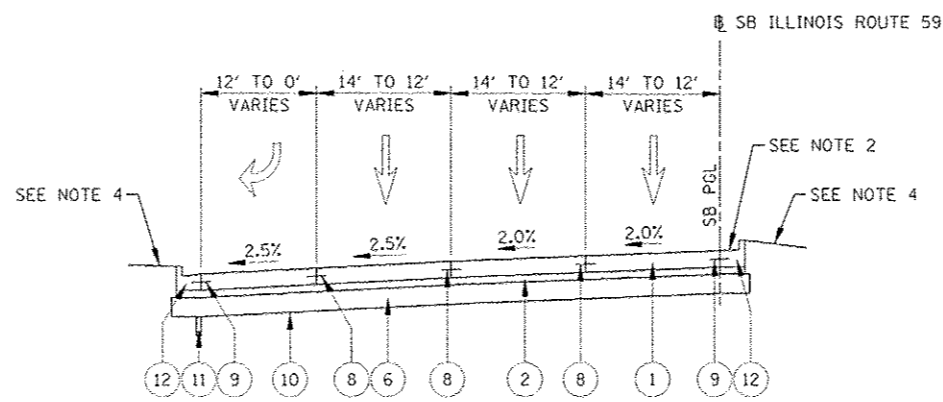

PROPOSED TYPICAL SECTION
 SOUTHBOUND LANE 14' TO 12' TRANSITION
 STA 827+46.3 TO STA 830+23.3
 (STA 4065+08.5 TO STA 4067+85.1)

IDOT LEGEND PROPOSED

- 1 PORTLAND CEMENT CONCRETE PAVEMENT 10 1/4" (JOINTED)
- 2 STABILIZED SUBBASE HOT-MIX ASPHALT, 4 1/2"
- 3 HOT-MIX ASPHALT PAVEMENT (FULL-DEPTH), 10 1/4"
- 4 POLYMERIZED HOT-MIX ASPHALT SURFACE COURSE, MIX "F", N90 (IL-9.5 mm); 2"
- 5 AGGREGATE SHOULDERS, TYPE B 10"
- 6 AGGREGATE SUBGRADE IMPROVEMENT, 12"
- 7 SUBBASE GRANULAR MATERIAL, TYPE B, 4"
- 8 LONGITUDINAL CONSTRUCTION JOINT GROUTED IN PLACE, NO. 6 TIE BAR AT 24" LONG, DEFORMED (EPOXY COATED) AT 24" CTS. (INCLUDED IN THE COST OF THE PROPOSED PAVEMENT)
- 9 GROUTED IN PLACE NO. 6 TIE BAR AT 24" LONG, DEFORMED (EPOXY COATED) AT 24" CTS. (INCLUDED IN THE COST OF THE PROPOSED CURB AND GUTTER)
- 10 GEOTECHNICAL FABRIC FOR GROUND STABILIZATION
- 11 PIPE UNDERDRAINS, FABRIC LINED TRENCH 4"
- 12 COMBINATION CONCRETE CURB & GUTTER, TYPE B-6.24
- 13 CONCRETE MEDIAN TYPE SB-6 (SPECIAL)
- 14 CONCRETE MEDIAN SURFACE, 4"
- 15 PORTLAND CEMENT CONCRETE SIDEWALK 5"
- 16 SHARED USE PATH, PORTLAND CEMENT CONCRETE SIDEWALK 5"
- 17 CONCRETE BARRIER WALL (SPECIAL)
- 18 HOT-MIX ASPHALT PATH, 6"
- 19 TOPSOIL 6" (TOPSOIL EXCAVATION AND PLACEMENT)
- 20 TOPSOIL FURNISH AND PLACE, 30"
- 21 SODDING, SALT TOLERANT OR SEEDING (AS NOTED ON LANDSCAPE PLAN)
- 22 STEEL PLATE BEAM GUARDRAIL, TYPE A, 6 FOOT POSTS
- 23 PARAPET RAILING
- 24 COMBINATION CONCRETE CURB & GUTTER, TYPE B-9.24
- 25 CHAIN LINK FENCE, 5'
- 26 LEVELING BINDER (MACHINE METHOD), N70 (IL-9.5mm); 3/4"
- 27 CONCRETE GUTTER, TYPE B
- 28 HOT-MIX ASPHALT BINDER COURSE, IL-19.0, N50; 5"

NOTES

- 1. SEE CROSS SECTIONS FOR GRADING INFORMATION.
- 2. CURB AND GUTTER FOR PROPOSED MEDIAN SHALL BE CONSTRUCTED WITH REVERSE PITCHED GUTTER.
- 3. SEE LANDSCAPING PLANS FOR SEEDING AND SODDING INFORMATION.
- 4. SEE LANDSCAPED MEDIAN TYPICAL SECTION AND CROSS SECTIONS FOR INFORMATION BEYOND THE BACK OF CURB.
- 5. GEOTECHNICAL FABRIC FOR GROUND STABILIZATION IS PLACED BENEATH AGGREGATE SUBGRADE 12", EXCEPT IN THE AREA OF LONGITUDINAL PIPE UNDERDRAINS WHERE IT IS LIMITED TO THE EDGE OF PAVEMENT (SEE PIPE UNDER DRAIN DETAIL).

| | | | | | | | | | | | |
|-----------|-----------|------------------------|---------|---|---|---------------------------|-------------------|--------|--------------|-----------|--|
| FILE NAME | USER NAME | DESIGNED <i>PJO</i> | REVISED | STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION | TYPICAL SECTIONS ILLINOIS ROUTE 59 | F.A.P. RTE. | SECTION | COUNTY | TOTAL SHEETS | SHEET NO. | |
| FILE # | | DRAWN <i>KES</i> | REVISED | | | 338 | (112 & 113) WRS-5 | DUPAGE | 963 | 55 | |
| | | CHECKED <i>JCM</i> | REVISED | | | CONTRACT NO. 60131 | | | | | |
| | | DATE <i>10/15/2012</i> | REVISED | | | ILLINOIS FED. AID PROJECT | | | | | |
| | | | | | SCALE: | SHEET NO. 9 OF 17 SHEETS | | STA. | TO STA. | | |