

F.A.S. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
2466	(11)RS-3	WOODFORD	23	1


**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION
DIVISION OF HIGHWAYS**

**PROPOSED
HIGHWAY PLANS**

**FAS 2466 ROUTE US 150
SECTION (11)RS-3
WOODFORD COUNTY
C-94-040-06**

PROJECT RS-2466 (110)

D-94-033-06

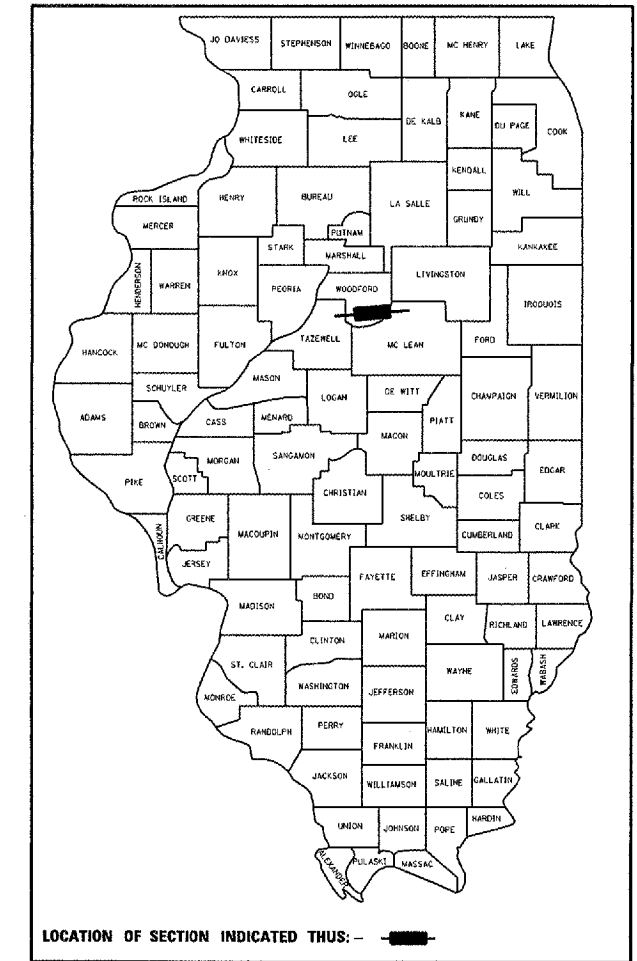

INDEX OF SHEETS

- 1 COVER SHEET
- 2-4 GENERAL NOTE / COMMITMENTS
- 5-6 SUMMARY OF QUANTITIES
- 7-9 TYPICAL SECTIONS
- 10-15 SCHEDULE OF QUANTITIES
- 16 LINE DIAGRAM
- 17 BUTT JT DETAIL AT RR CROSSING
- 18 REFERENCE PTS. / SURVEY MARKER
- 19-23 DISTRICT CADD STANDARDS

STANDARDS

- 406201
- 442201-02
- 701006-02
- 701306-01
- 701311-02
- 701336-04
- 702001-06
- 780001-01


DESIGN DESIGNATION
RURAL MAJOR COLLECTOR

ADT = 3,700
VEHICLES

PV = 85.9%
SU = 11.3%
MU = 2.8%

J.U.L.I.E.
JOINT UTILITY LOCATION INFORMATION FOR EXCAVATION
1-800-892-0123

**IMPROVEMENT
BEGINS
STA. 193+74**

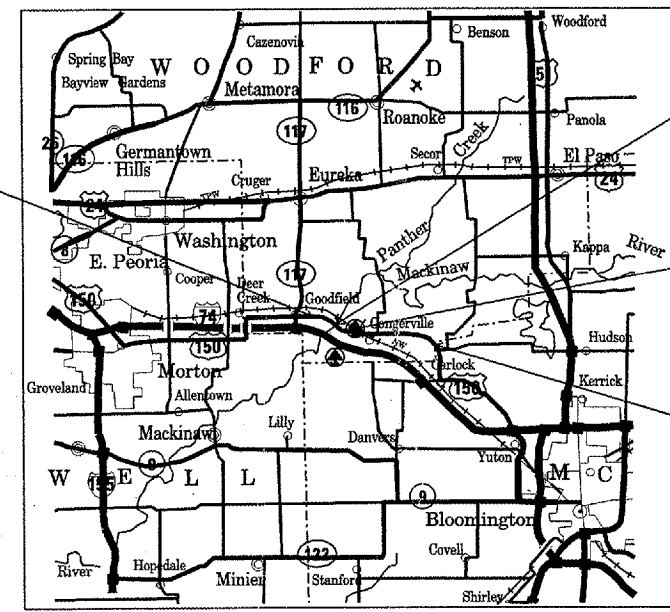

**BRIDGE OMISSION
SN 102-0043
STA. 284+72 - 289+05**

**R. R. OMISSION
STA. 1096+42 - 1096+70**

**IMPROVEMENT ENDS
STA. 244+62**

STATION EQUATIONS

- STA. 209+25 BACK = STA. 209+30 AHEAD
- STA. 263+99.2 BACK = STA. 263+98.8 AHEAD
- STA. 283+91.05 BACK = STA. 283+57.65 AHEAD
- STA. 326+00 BACK = STA. 1043+44.14 AHEAD
- STA. 1121+64 BACK = STA. 0+00 AHEAD
- STA. 132+41.6 BACK = STA. 137+54.9 AHEAD
- STA. 171+90.3 BACK = STA. 171+97.7 AHEAD

GROSS LENGTH = 8.53 MILES NET LENGTH = 8.44 MILES

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION
DIVISION OF HIGHWAYS

SUBMITTED *March 19 2007*

[Signature]
DEPUTY DIRECTOR OF HIGHWAYS, REGION ENGINEER

May 11 2007
Eric E. Horn
INTERIM ENGINEER OF DESIGN AND ENVIRONMENT

May 11 2007
Milton R. Seese
DIRECTOR OF HIGHWAYS, CHIEF ENGINEER

**PRINTED BY THE AUTHORITY
OF THE STATE OF ILLINOIS**

DESIGNER: Elias Eiderzi (309-671-3459) PROJECT ENGR.: MAUREEN ADDIS (309-671-3454)