

ROUTE	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
FAS 938	05-00064-00-RS	PULASKI	32	26
PROJECT NO. RS-HPP-3300 (002)			CONTRACT NO. 99260	


Angle of Intersection	Side Road		Private Entrance	
	Acute L.	Obtuse L.	Acute L.	Obtuse L.
	90° - 80°	25'	25'	15'
79° - 70°	25'	40'	15'	25'
69° - 60°	25'	60'	15'	35'
59° - 50°	20'	75'	10'	40'
49° - 40°	20'	100'	10'	60'
39° - 30°	15'	150'	10'	100'

NOTES


Thickness of binder (if applicable) and surface course shall be equal to the mainline resurfacing.

Where hot-mix asphalt is to be placed, the existing surface shall be primed.


The actual number, and locations, of entrances and side roads shall be determined in the field by the Engineer.

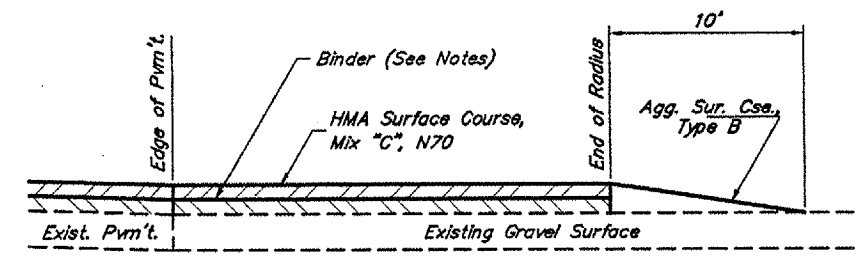


SECTION A-A SIDE ROAD - AGGREGATE
(Est. No. = 0)

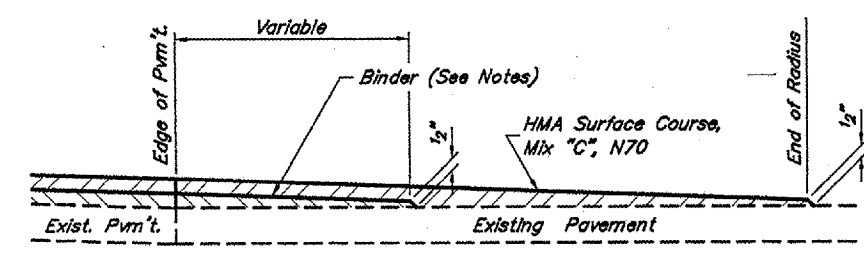


SECTION B-B SIDE ROAD - ASPHALT
(Est. No. = 9)

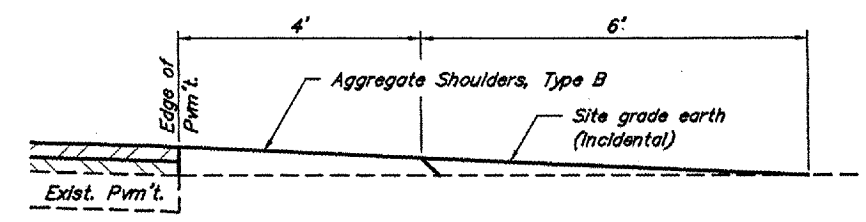


SECTION A-A FIELD ENTRANCE
(Est. No. = 49)

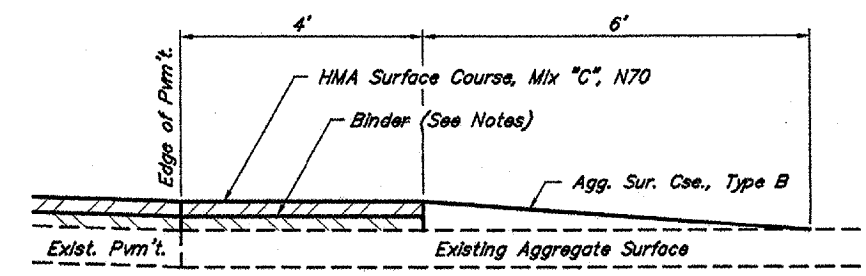


SECTION A-A PRIVATE ENTRANCE - AGGREGATE
(Est. No. = 38)

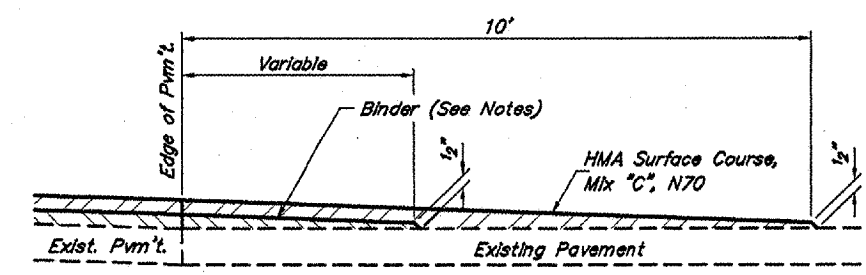

SECTION A-A PRIVATE ENTRANCE - ASPHALT
(Est. No. = 8)

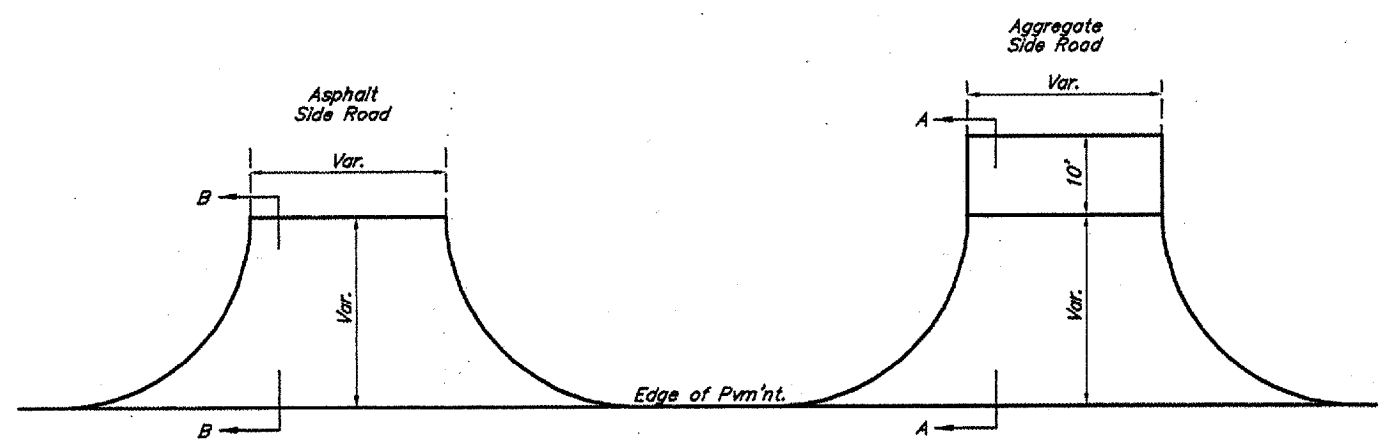

TYPICAL SIDE ROAD DETAILS

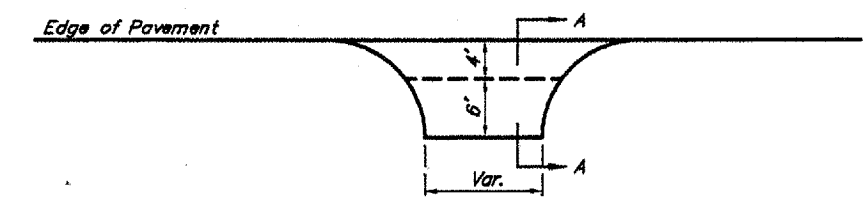

TYPICAL ENTRANCE DETAILS

578 Ent-SR 02/07/07 1547 RLM