F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
365	01-00273-00-CH	KANE	172	131
STA.	TO STA.			
FED. ROAD DIST. NO.	ILLINOIS	FED. AID PROJECT		

CONTRACT NO. 83906

PLAN — SURVEYED — BY — DATE
PLOTTED
DRAWN
ALIGNMENT CHECKED
RT. OF WAY CHECKED
CADD FILE NAME
NOTE BOOK
NO.

PROFILE — SURVEYED — BY — DATE
PLOTTED
DRAWN
CHECKED
BAR. NOTED
STRUCTURE NO(S).(THIS SHEET)
NOTE BOOK
NO.

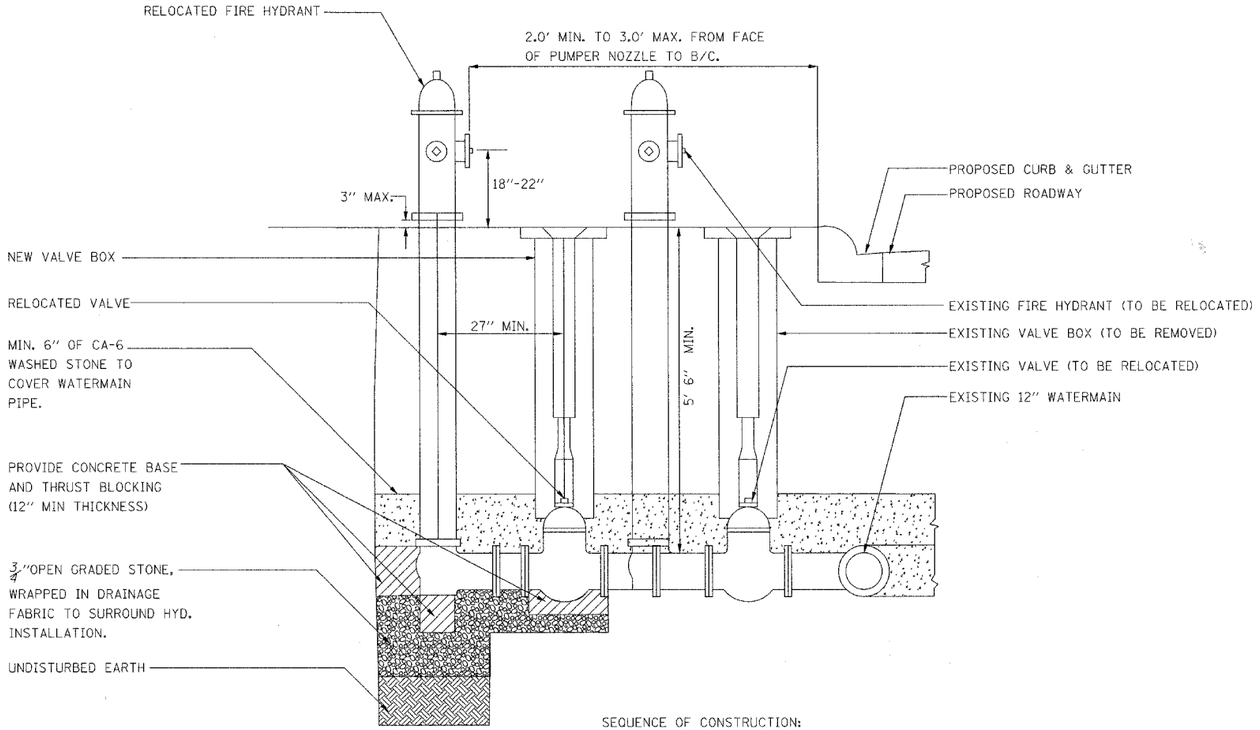

SEQUENCE OF CONSTRUCTION:

1. CLOSE EXISTING 12" VALVES (CONTACT CITY OF AURORA DEPARTMENT OF PUBLIC WORKS A MINUMUM OF 48 HOURS PRIOR TO ANY DISRUPTION IN SERVICE).
2. REMOVE EXISTING HYDRANT, VALVE, AND VALVE BOX FROM TEE.
3. RELOCATE EXISTING HYDRANT AND VALVE AND REINSTALL AT NEW LOCATION. INSTALL NEW VALVE BOX.
4. REOPEN EXISTING 12" VALVES.
5. BACKFILL.
6. FLUSH AND TEST FOR CHLORINE RESIDUAL AND PROVIDE TEST.

NOTES:

1. NEW VALVE BOX SHALL BE "TYLER" OR APPROVED EQUAL.
2. ALL NUTS, BOLTS, & THREADED RODS SHALL BE STAINLESS STEEL.
3. TRENCH BACKFILL SHALL BE PROVIDED FOR TRENCHES MADE IN THE SUBGRADE OF THE PROPOSED IMPROVEMENT OR WITHIN 2' OF THE PROPOSED CURB IN ACCORDANCE WITH SECTION 208 OF THE STANDARD SPECIFICATIONS.

FIRE HYDRANTS TO BE MOVED

ILLINOIS DEPARTMENT OF TRANSPORTATION
ILLINOIS ROUTE 56 AT KIRK / FARNSWORTH

MISCELLANEOUS DETAILS

SCALE: VERT. HORIZ.
DATE APR 06 2007
DRAWN BY BAH
CHECKED BY APS

y:\jobs\dem\fhwa2001\01021-xc_rte56\comfin_dwg\321_det11.dgn
4/7/2007