



F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
07-00000-00-SG		TAZEWELL	19	11

FED. ROAD DIST. NO. ILLINOIS FED. AID PROJECT
 • VARIOUS




DESCRIPTION	QUANTITY
SIGN PANEL, TYPE I	64 SQ FT
SERVICE INSTALLATION, TYPE B (MODIFIED)	1 EACH
CONDUIT IN TRENCH, 1 1/2" DIA, PVC	3897 FEET
CONDUIT PUSHED, 1 1/2" DIA., PVC	121 FEET
CONDUIT ATTACHED TO STRUCTURE, 1 1/2" DIA, GALVANIZED STEEL	78 FEET
GULFBOX JUNCTION	9 EACH
TRENCH AND BACKFILL FOR ELECTRICAL WORK	3897 FEET
FLASHER CONTROLLER	1 EACH
ELECTRIC CABLE IN CONDUIT, SIGNAL NO. 14 3C	4998 FEET
SIGNAL HEAD, POLYCARBONATE, LED, 1-FACE, 1-SECTION, POST MOUNTED	6 EACH
FURNISHING AND SETTING WOOD POST	6 EACH
REMOVE EXISTING SIGN POST	6 EACH
REMOVE EXISTING FLASHING BEACON INSTALLATION COMPLETE	1 EACH


- NOTES**
- GROUND CONTROLLER, SERVICE EXPOSED METALLIC CONDUIT IN ACCORDANCE WITH NEC REQUIREMENTS. COST INCLUDED IN CONTRACT.
 - NO. 14 SPARE CONDUCTOR CAN BE USED FOR GROUNDING. COST INCLUDED IN CONTRACT
 - AERIAL SERVICE CABLE FROM THE EXISTING SERVICE POLE TO THE PROPOSED SERVICE WILL BE PROVIDED BY OTHERS
 - CONTRACTOR TO COORDINATE WITH AMEREN TO PROVIDE A NEW SERVICE POLE TO BE USED FOR THE PROPOSED LUMINAIRE. POLE SHALL BE LOCATED 25 FEET FROM EDGE OF SPRINGFIELD ROAD AND A MINIMUM OF 15 FEET FROM THE EDGE OF TOBOGGAN AVENUE. COST TO BE INCLUDED IN SERVICE INSTALLATION, TYPE B (MODIFIED).

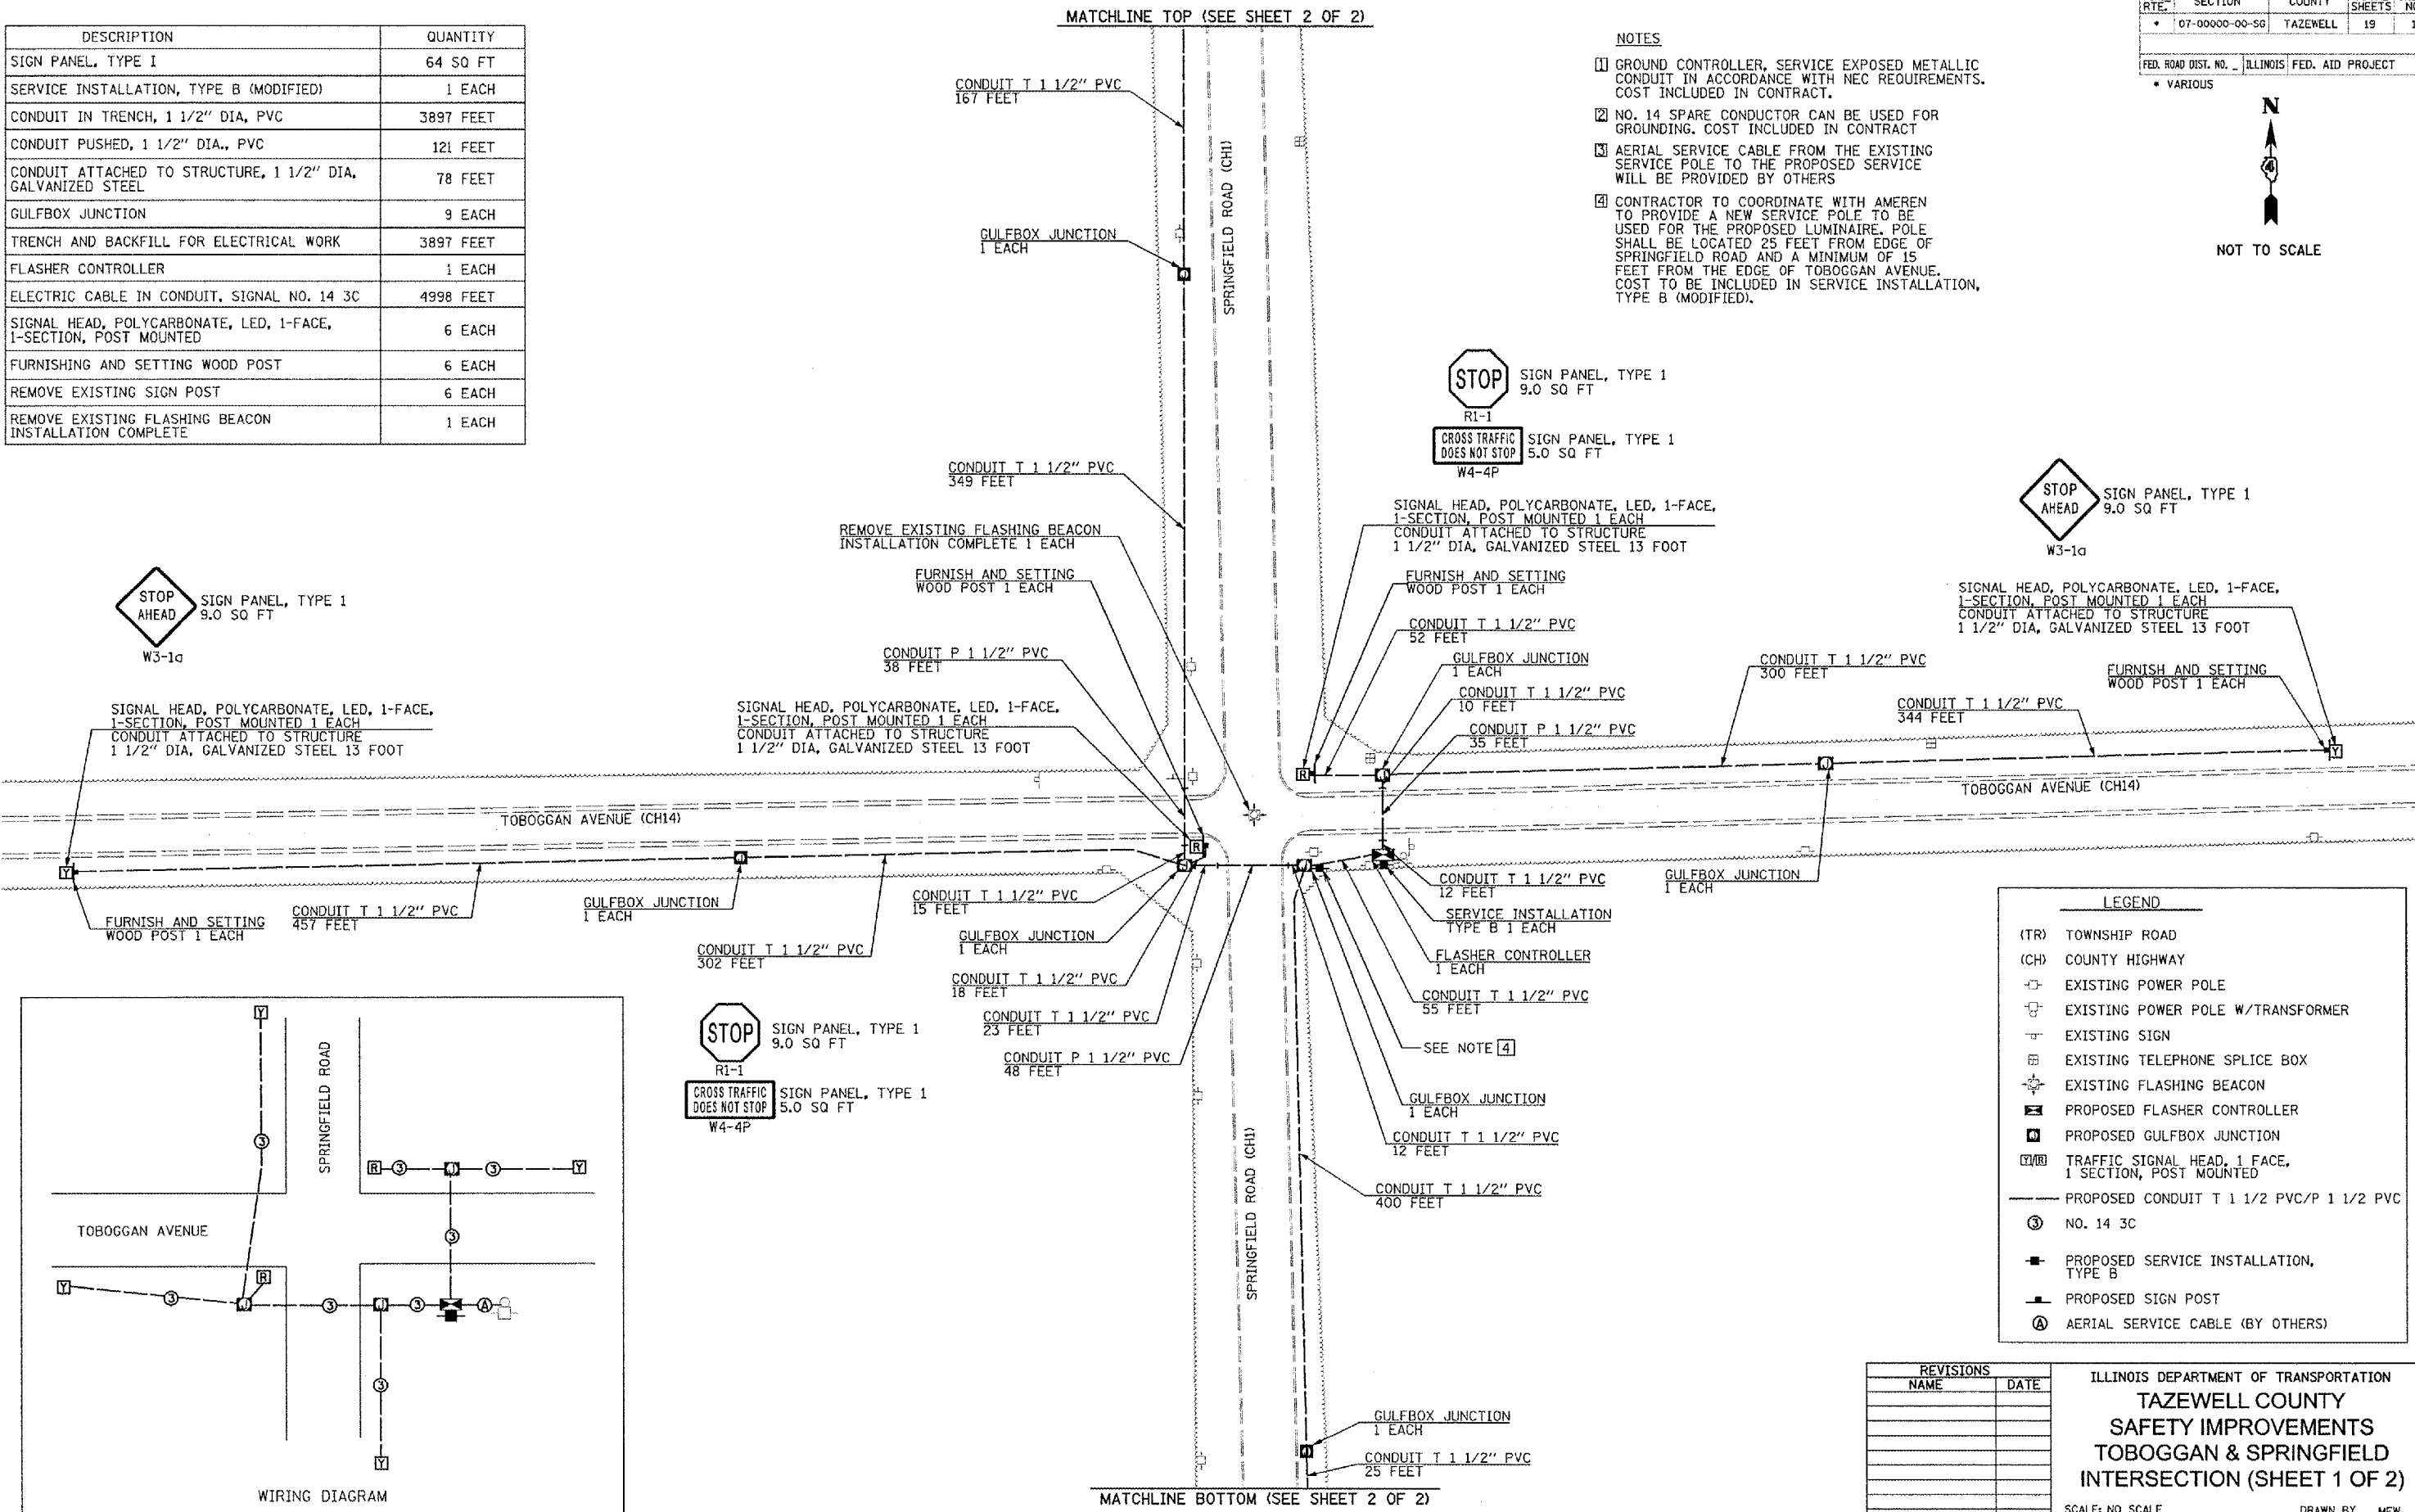

SIGNAL HEAD, POLYCARBONATE, LED, 1-FACE, 1-SECTION, POST MOUNTED 1 EACH
 CONDUIT ATTACHED TO STRUCTURE 1 1/2" DIA, GALVANIZED STEEL 13 FOOT

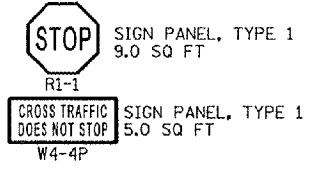

SIGNAL HEAD, POLYCARBONATE, LED, 1-FACE, 1-SECTION, POST MOUNTED 1 EACH
 CONDUIT ATTACHED TO STRUCTURE 1 1/2" DIA, GALVANIZED STEEL 13 FOOT

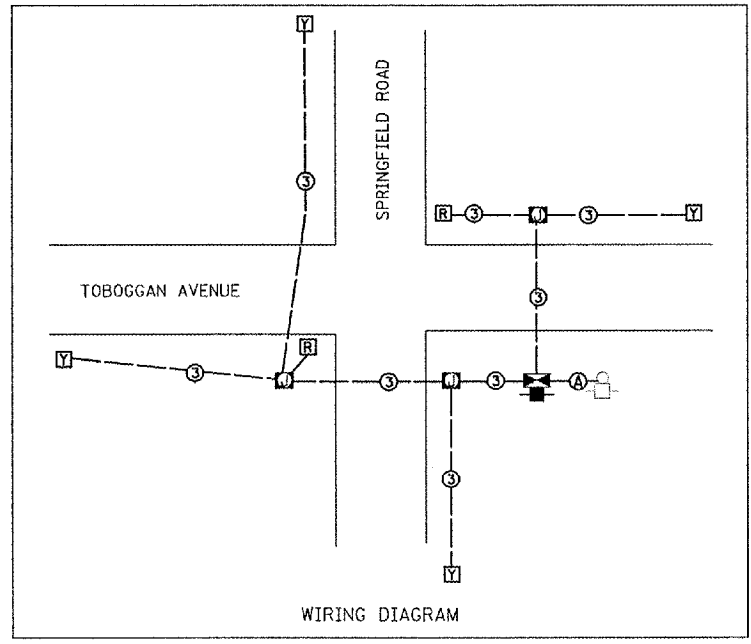

LEGEND

- (TR) TOWNSHIP ROAD
- (CH) COUNTY HIGHWAY
- ⊕ EXISTING POWER POLE
- ⊕⊕ EXISTING POWER POLE W/TRANSFORMER
- ⊕ EXISTING SIGN
- ⊕ EXISTING TELEPHONE SPLICE BOX
- ⊕ EXISTING FLASHING BEACON
- ⊕ PROPOSED FLASHER CONTROLLER
- ⊕ PROPOSED GULFBOX JUNCTION
- ⊕⊕ TRAFFIC SIGNAL HEAD, 1 FACE, 1 SECTION, POST MOUNTED
- PROPOSED CONDUIT T 1 1/2 PVC/P 1 1/2 PVC
- ③ NO. 14 3C
- ⊕ PROPOSED SERVICE INSTALLATION, TYPE B
- ⊕ PROPOSED SIGN POST
- ⊕ AERIAL SERVICE CABLE (BY OTHERS)

REVISIONS

NAME	DATE

ILLINOIS DEPARTMENT OF TRANSPORTATION
TAZEWELL COUNTY
SAFETY IMPROVEMENTS
TOBOGGAN & SPRINGFIELD
INTERSECTION (SHEET 1 OF 2)

SCALE: NO SCALE
 DATE: 03/20/2007
 DRAWN BY: MEW
 CHECKED BY: DLH SD0

Copyright © 2007 D.A.S. Consulting Services, LLC
D.A.S.
 Consulting Services, LLC
 600 Beckett Lane Drive
 Groveland, Illinois 61535

PLOT DATE = 4/7/2007
 FILE NAME = c:\dms\proj\DR\job\06\06\06\06\06\06.dgn