
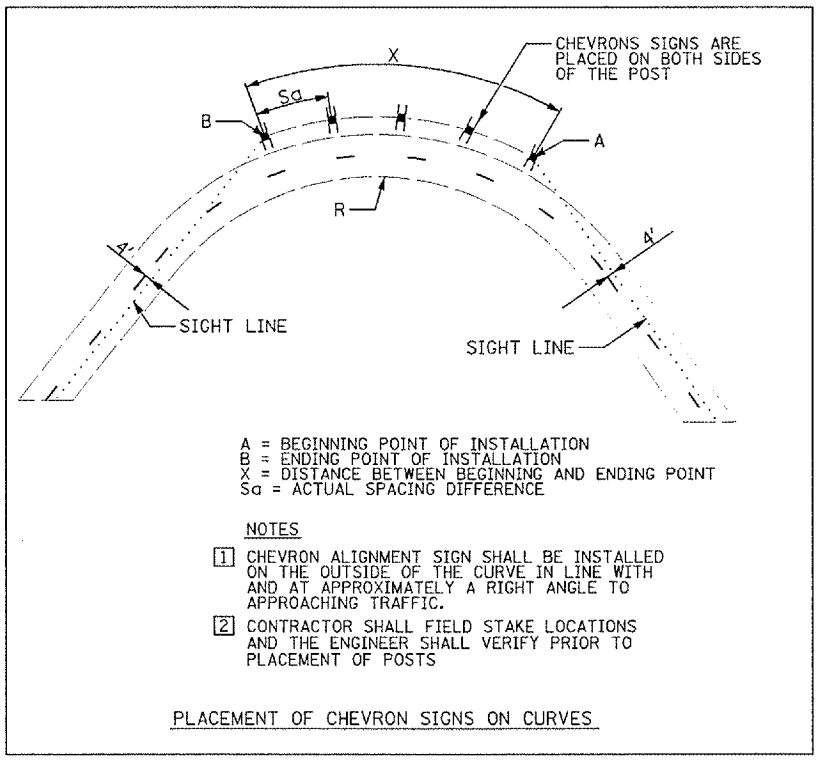
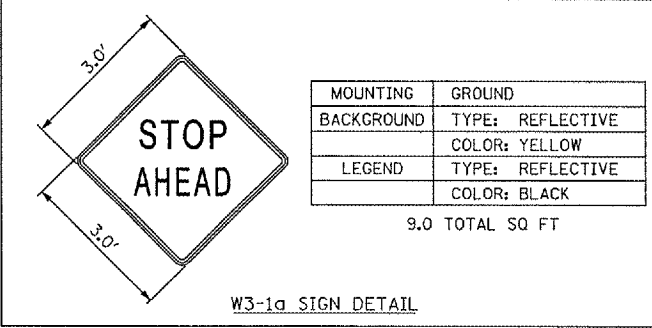
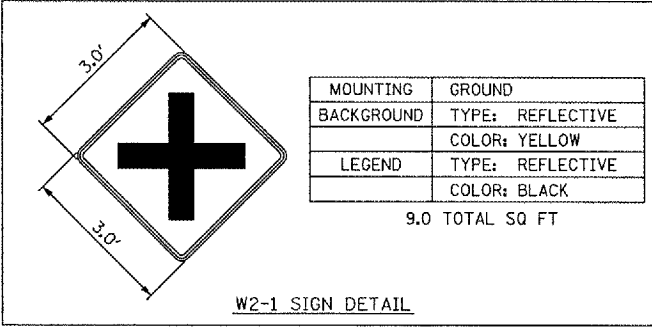
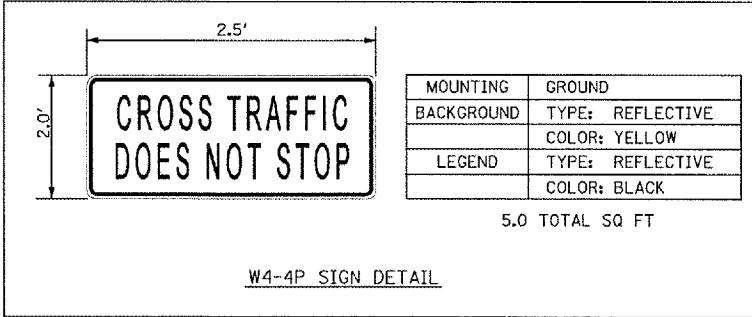
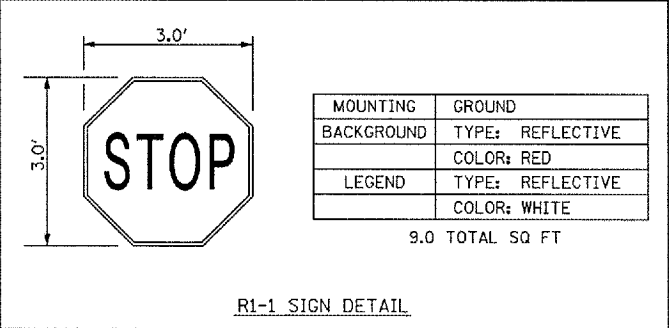
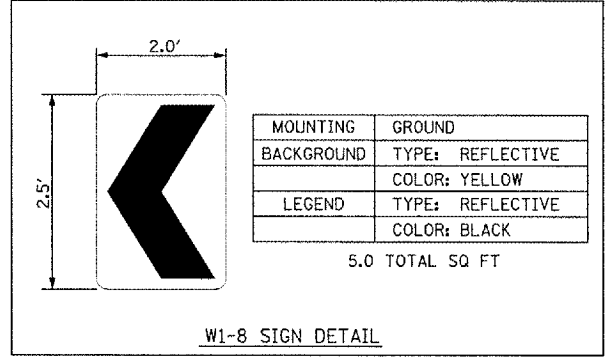
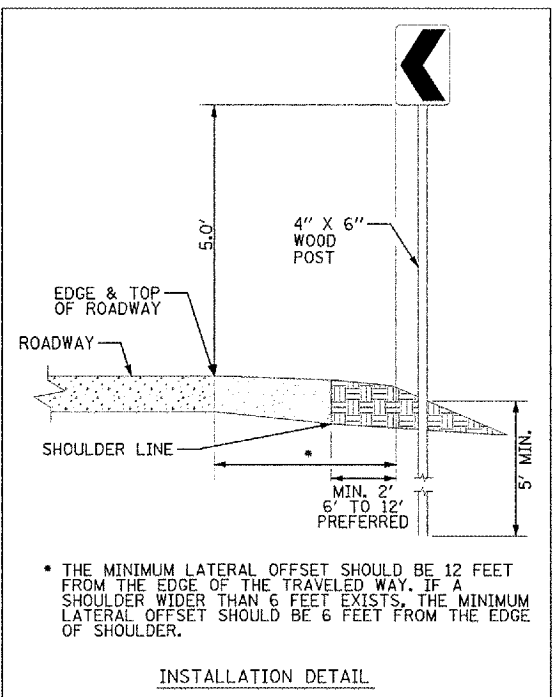


F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
• 07-00000-00-SG		TAZEWELL	19	18
FED. ROAD DIST. NO. ILLINOIS FED. AID PROJECT				
• VARIOUS				

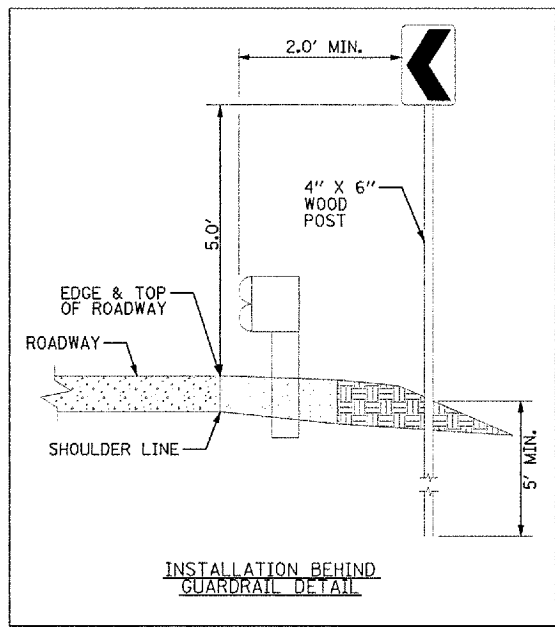

GENERAL NOTES:

- NO COMMITMENTS WERE MADE IN CONJUNCTION WITH THIS PROJECT.
- ALL TRAFFIC SIGNALS SHALL BE 12" L.E.D. SECTIONS.
- THE LOCATION OF ALL UTILITIES SHALL BE FIELD VERIFIED BY THE CONTRACTOR BEFORE THE INSTALLATION OF ANY TRAFFIC SIGNAL COMPONENTS OR SIGN POSTS.
- ALL REMOVAL ITEMS SHALL BE DISPOSED OF OFF THE RIGHT-OF-WAY SEE SPECIAL FOR ADDITIONAL GUIDANCE.
- THE EXISTING FLASHING BEACONS SHALL REMAIN IN OPERATION DURING THE CONSTRUCTION OF THE PROPOSED FLASHING BEACONS.
- ANY MAINTENANCE OF EXISTING FLASHING BEACONS SHALL BE CONSIDERED AS EXTRA WORK.
- ANY REFERENCE TO A STANDARD IN THESE PLANS SHALL BE INTERPRETED TO MEAN THE EDITION AS INDICATED BY THE SUB NUMBER LISTED IN THE INDEX OF SHEETS.
- ACCESS TO ALL ENTRANCES AND SIDE ROADS SHALL BE MAINTAINED AT ALL TIMES.
- THE CONTRACTOR SHALL BE RESPONSIBLE FOR PROTECTING UTILITY PROPERTY FROM CONSTRUCTION OPERATIONS, AS OUTLINED IN ARTICLE 107.31 OF THE STANDARD SPECIFICATIONS. THE J.U.L.I.E. NUMBER IS 1-800-892-0123. A MINIMUM OF 48 HOURS ADVANCE NOTICE IS REQUIRED.
- PLAN DIMENSIONS AND DETAILS RELATIVE TO THE EXISTING FACILITIES HAVE BEEN TAKEN FROM AERIALS AND FIELD REVIEWS AND ARE SUBJECT TO CONSTRUCTION VARIATIONS. IT SHALL BE THE CONTRACTORS' RESPONSIBILITY TO VERIFY SUCH DIMENSIONS AND DETAILS IN THE FIELD. SUCH VARIATIONS SHALL NOT BE A CAUSE FOR ADDITIONAL COMPENSATION DUE TO A CHANGE IN SCOPE OF WORK; HOWEVER, THE CONTRACTOR WILL BE PAID FOR THE QUANTITY ACTUALLY FURNISHED AT THE UNIT PRICE BID FOR THE WORK.
- UNLESS OTHERWISE NOTED, CONTRACTOR SHALL INSTALL REPLACEMENT POSTS AND SIGN PANELS IN THEIR ORIGINAL LOCATIONS.
- ALL ELECTRIC CABLE RUNS SHALL BE CONTINUOUS, NO SPLICES WILL BE ALLOWED.
- PLACEMENT OF CHEVRON SIGNS MAY REQUIRE ADJUSTMENT IN THE FIELD. PLEASE NOTE THAT SPECIAL CURVE SITUATIONS MAY ARISE IN WHICH A COMBINATION OF VERTICAL AND HORIZONTAL CURVATURE WILL REQUIRE ADDITIONAL CONSIDERATION BY THE ENGINEER.
- CONTRACTOR SHALL ADJUST CHEVRON SIGN PLACEMENT AS DIRECTED BY THE ENGINEER TO ENSURE SITE DISTANCE AT INTERSECTING ROADWAYS IS NOT IMPAIRED.

Copyright © 2007 D.A.S. Consulting Services, LLC
D.A.S.
 Consulting Services, LLC
 800 Bassler Lake Drive
 Cleveland, Illinois 61535

PLOT DATE = 4/7/2007
 FILE NAME = c:\new-pro\106\pba\0808a\road\cvt1\sheet\c-detail.dgn

REVISIONS	
NAME	DATE

ILLINOIS DEPARTMENT OF TRANSPORTATION

TAZEWELL COUNTY

SAFETY IMPROVEMENTS

GENERAL NOTES & DETAILS

SHEET 1 OF 2

SCALE: NO SCALE DRAWN BY: MEW
 DATE: 03/20/2007 CHECKED BY: DLH SD0