CON #95497

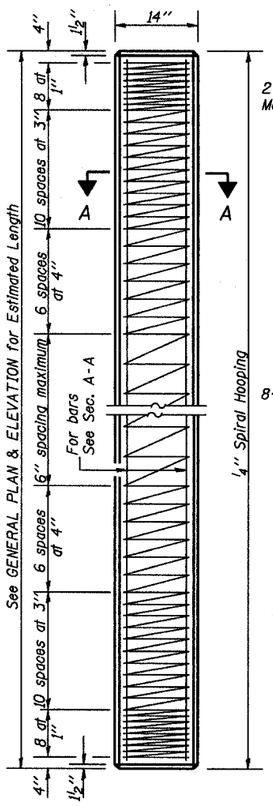



SECTION A-A
FOR PILES UNDER
45' LONG



SECTION A-A
FOR PILES 45'
OR MORE

Handling: For Pile lengths up to 45' use two slings placed at a distance of 0.21L from each end. For Piles longer than 45', use three slings placed at a distance of 0.12L from each end and at mid point of pile.

DETAIL OF PRECAST
CONCRETE PILES

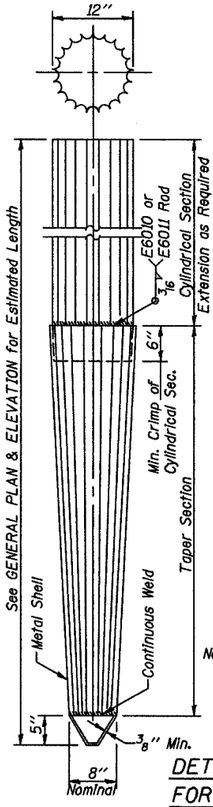



FIELD CRIMP DETAIL

Note: 6" Crimp shall either be supplied on the cylindrical section or made in the field as detailed.



OPTIONAL FLAT END

ALLOWABLE TAPER SECTIONS

10' Length-Taper 1" in 2'-6"
17' Length-Taper 1" in 4'-0"
25' Length-Taper 1" in 7'-0"
30' Length-Taper 1" in 7'-0"

Note: The thickness of the shell shall be 0.1495 inches with a tolerance of 5%. The shell shall be according to Article 1006.05 (a) of the Standard Specification except that minimum yield strength for the steel after cold working shall be 50,000 p.s.i.

DETAIL OF TAPERED METAL SHELLS
FOR CAST IN PLACE CONCRETE PILES

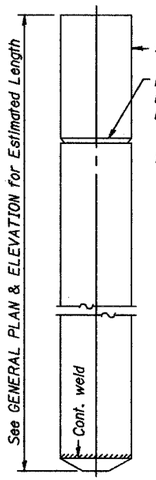

Note: Driving and bearing ends of pipe shall be cut square. The thickness of the shell shall be 0.1793 inches with a tolerance of 5%.



OPTIONAL
FLAT END

DETAIL OF CYLINDRICAL
STEEL SHELL FOR CAST IN
PLACE CONCRETE PILES

Reinforcement cage shall be omitted when Concrete Encasement is provided.

The cost of Reinforcement is included with the Cost of Furnishing Piles.

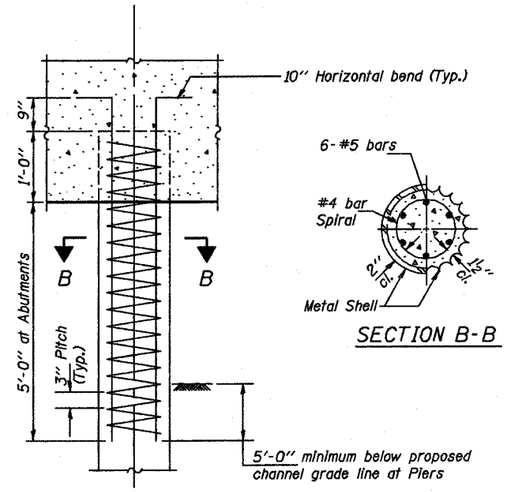

SECTION B-B

DETAIL OF REINFORCEMENT
FOR METAL SHELLS

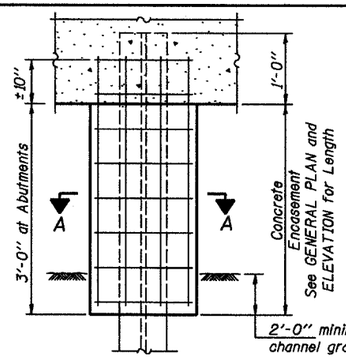



Welded wire fabric 6 x 6-W4.0 x W4.0 weighing 58#/100 sq. ft. The cost of Reinforcement is included with the cost of Concrete Encasement. Forms for Encasement may be omitted when soil conditions will permit.

SECTION A-A

Pile	'F'
HP8	1'-6"
HP10	1'-9"
HP12	2'-0"

DETAIL OF HP
PILE ENCASEMENT

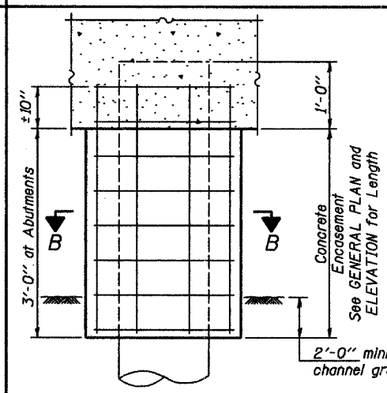



Welded wire fabric 6 x 6-W4.0 x W4.0 weighing 58#/100 sq. ft. The cost of Reinforcement is included with the cost of Concrete Encasement. Forms for Encasement may be omitted when soil conditions will permit.

SECTION B-B

DETAIL OF METAL SHELL
PILE ENCASEMENT

QUANTITIES/FT. OF ENCASEMENT

(STEEL PILES)

Pile Size	Item	Quantity
HP8	Concrete Encasement	0.063 C.Y.
HP10	Concrete Encasement	0.086 C.Y.
HP12	Concrete Encasement	0.112 C.Y.

(METAL SHELL PILES)

Pile Size	Item	Quantity
12" Dia.	Concrete Encasement	0.087 C.Y.

Illinois Department of Transportation

PASSED FEBRUARY 1, 2000
Engineer of Bridge Design
APPROVED FEBRUARY 1, 2000
Engineer of Bridges and Structures

ISSUED 1-1-98

PILE DETAILS

STANDARD CX-1