SHEET ND,

11

TOTAL SHEETS

14

16BR-M

OGLE

GENERAL NOTES

The strip seal shall be made continuous and shall have

are minimum dimensions. The actual configuration of the

Locking Edge Rails and matching strip seal may vary from manufacturer to manufacturer. Flanged edge rails will not

The manufacturer's recommended installation methods

The joint opening and deck dimensions detailed on the superstructure are based on a preformed joint seal. If the

modifications shall be made at no additional cost to the State.

contractor elects to use the alternate strip seal joint, the

opening and deck dimensions shall be modified according

to the dimensions detailed on this sheet. Required

The height and thickness of the Locking Edge Rails shown

Locking Edge Rails may be spliced at slope discontinuities

a minimum thickness of \(\frac{1}{a} \). The configuration of the

strip seal shall match the configuration of the Locking

FED. ROAD DIST. ND. 7 ILLINOIS FED. AID PROJECT

2079 -**

and stage construction joints.

Edge Rails.


be allowed.


shall be followed.

SHEET NO. 6

-7 SHEETS

STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION

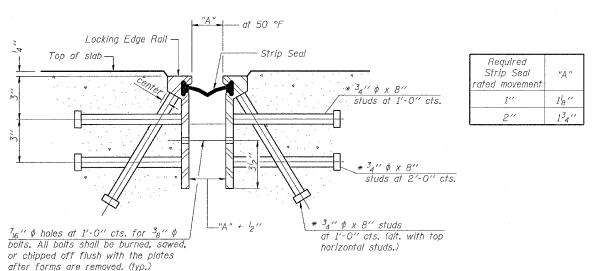

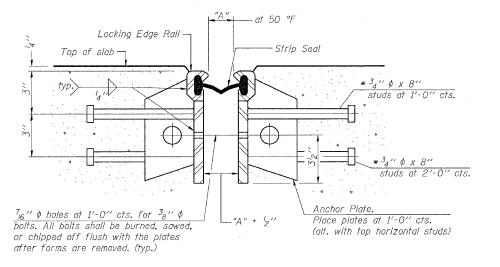


SECTION THRU ROLLED RAIL EXP. JOINT

(Studs Required)


* Granular or solid flux filled headed studs conforming to Article 1006.32 of the Std. Specs., automatically end welded.

SECTION THRU WELDED RAIL EXP. JOINT


(Studs Required) (Anchor Plates Required)








WELDED RAIL



ANCHOR P (for welded rail)


LOCKING EDGE RAILS



LOCKING EDGE RAIL SPLICE

The inside of the locking edge rail groove shall be free of weld residue.

DESIGNED -		_	200
CHECKED -	EXAMINED		
DRAWN -	PASSED	ENGINEER OF	STRUCTURAL SERVICES
CHECKED -		ENGINEER OF 8R	IDGES AND STRUCTURES
EJ-BJS	10-22-04		

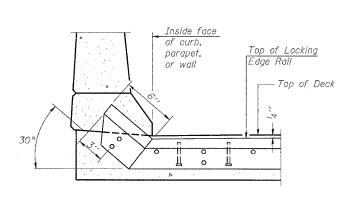

AT CURB. PARAPET, OR WALL

AT SIDEWALK OR MEDIAN*

Sidewalk surface or

* Shorter plates with a single row of studs at 12" centers may be necessary on medians which are shallower than 9". See manufacturer's recommendation.

-Strip seal joint

(Sheet 2 of 2)

BRIDGE JOINT SYSTEM - EXPANSION (ALTERNATE-STRIP SEAL)

US 52 OVER ELKHORN CREEK FAS ROUTE 2079 (US 52) SECTION 16BR-M OGLE COUNTY STRUCTURE NUMBER 071-0070

TYPICAL END TREATMENTS