
STAGE 3 TEMPORARY TRAFFIC SIGNAL CONTROLLER SEQUENCE

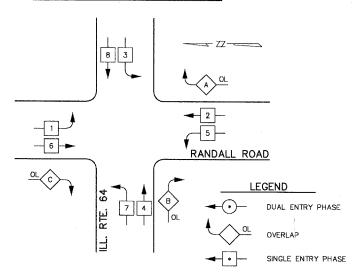


PHASE DESIGNATION DIAGRAM

ASSOCIATED PHASE

NUMBER REFERS TO


OVERLAP LETTER		PERMISSIVE PHASE		PROTECTED PHASE	
Α	=	2	+	3	
В	=	4	+	5	
С	=	6	+	7	

TEMPORARY TRAFFIC SIGNAL EMERGENCY VEHICLE PREEMPTION SEQUENCE



PROPOSED E	MERGENC	Y VEHICLE	PREEMP	TORS
EMERGENCY VEHICLE PREEMPTOR	3	4	5	6
MOVEMENT	7	1	1	↓

I.D.O.T TRAFFIC SIGNAL INSTALLATION ELECTRICAL SERVICE REQUIREMENTS					
TYPE	NO. LAMPS	x WATTAGE			
		INCAND.	LED	% OPERATION	
SIGNAL (RED)	20	135	مجز	0.50	1350.0
(YELLOW)	20	135	281	0.25	675.0
(GREEN)	20	135	18	0.25	675.0
ARROW	12	135	مجاز	0.10	162.0
PED. SIGNAL		90	28	1.00	0.0
CONTROLLER	1	100		1.00	100.0
ILLUM. SIGN		84		0.05	0.0
VIDEO DETECT	4	23	28	1.00	92.0
LUMINAIRE	- 8	400		0.50	1600.0
- FLASHER				0.50	
ENERGY COSTS TO:				TOTAL =	4654.0
	CITY OF ST. 2 EAST MAIN ST. CHARLES	STREET			
ENERGY SUPPLY	CONTACT: Tom Lesicwicz PHONE: (630) 377-4486 COMPANY: St. Charles Electric Department				

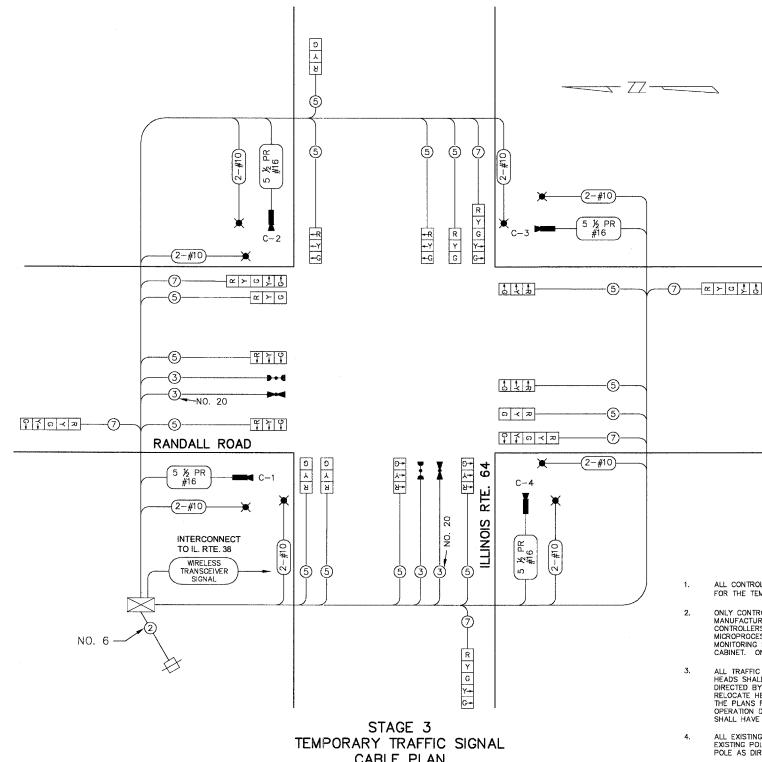

CABLE PLAN

EMERGENCY VEHICLE LIGHT DETECTOR CONFIRMATION BEACON

TEMPORARY CABLE PLAN LEGEND

TEMPORARY CONTROLLER

 \Box

COUNTY SHTS.

F.H.W.A. REG.5 | ILLINOIS | PROJECT F-0336(

TEMPORARY CABLE PLAN

TEMPORARY TRAFFIC SIGNAL SECTION 12"

INDICATES NUMBER OF CONDUCTORS IN CABLE. ALL CONDUCTORS TO BE NUMBER 14 AWG WIRE UNLESS OTHERWISE NOTED.

TEMPORARY SERVICE INSTALLATION

PEDESTRIAN PUSHBUTTON DETECTOR

VEHICLE DETECTOR, INDUCTION LOOP

12" PEDESTRIAN SIGNAL SECTION

MACHINE VISION PROCESSOR (MVP)

TEMPORARY LUMINAIRE, S.V. 400 W

NOTES FOR TEMPORARY TRAFFIC SIGNAL

- ALL CONTROL EQUIPMENT INCLUDING EMERGENCY PRE-EMPTION AND COMMUNICATION DEVICES FOR THE TEMPORARY TRAFFIC SIGNALS(S) SHALL BE FURNISHED BY THE CONTRACTOR.
- ONLY CONTROLLERS SUPPLIED BY ONE OF THE DISTRICT APPROVED CLOSED LOOP EQUIPMENT MANUFACTURERS WILL BE APPROVED FOR USE AT TEMPORARY SIGNAL LOCATIONS. ALL CONTROLLERS USED FOR TEMPORARY TRAFFIC SIGNALS SHALL BE FULLY ACTUATED NEMA MICROPROCESSOR BASED WITH RES232 DATA ENTRY PORTS COMPATIBLE WITH EXISTING MONITORING SOFTWARE APPROVED BY IDOT DISTRICT 1, INSTALLED IN A NEMA TS1 OR TS2 CABINET. ONLY ONE BRAND OF CONTROLLER WILL BE ACCTPED FOR ANY ONE CONTRACT.
 - ALL TRAFFIC SIGNAL SECTIONS AND PEDESTRIAN SIGNAL SECTIONS SHALL BE 12" (300mm). HEADS SHALL BE PLACED AS INDICATED ON THE TEMPORARY TRAFFIC SIGNAL PLAN OR AS DIRECTED BY THE ENGINEER. THE CONTRACTOR SHALL FURNISH ENOUGH CABLE SLACK TO RELOCATE HEADS TO ANY POSITION ON THE SPAN WIRE OR AT LOCATIONS ILLUSTRATED ON THE PLANS FOR CONTRUCTION STAGING. THE TEMPORARY TRAFFIC SIGNAL SHALL REMAIN IN OPERATION DURING ALL SIGNAL HEAD RELOCATIONS. EACH TEMPORARY TRAFFIC SIGNAL HEAD SHALL HAVE ITS OWN CABLE FROM THE CONTROLLER CABINET TO THE SIGNAL HEAD.
- ALL EXISTING STREET NAME AND INTERSECTION REGULATORY SIGNS SHALL BE REMOVED FROM EXISTING POLES, RELOCATED AND SECURELY FASTENED TO THE SIGNAL SPAN WIRE OR WOOD POLE AS DIRECTED BY THE ENGINEER.
- ANY TEMPORARY SIGNAL WITHIN AN EXISTING CLOSED LOOP TRAFFIC SIGNAL SYSTEM SHALL BE INTERCONNECTED TO THAT SYSTEM USING SIMILAR BRAND CONTROL EQUIPMENT.
- THE TEMPORARY TRAFFIC SIGNAL SHALL HAVE THE SIGNAL HEAD DISPLAYS, SIGNAL HEAD PLACEMENTS AND CONTROLLER PHASING MATCH THE EXISTING TRAFFIC SIGNAL, AT THE TIME OF THE TURN ON. IF NO TRAFFIC STAGING IS IN PLACE OR WILL NOT BE STAGED ON THE DAY OF THE TURN ON.
- ALL TEMPORARY SIGNAL HEADS SHALL USE INCANDESCENT BULBS.

DIVISION OF TRANSPORTATION STAGE 3 TEMPORARY TRAFFIC SIGNAL CABLE PLA PHASE DESIGNATION DIAGRAM THE TRAFFIC SIGNAL CONTROL EQUIPMENT FOR THIS PROJECT SHALL BE "EAGLE" TO RANDALL RD. & ILLINOIS RTE. 6 MATCH THE EXISTING SYSTEM. NAME DATE DRAWN BY: SCALE: NONE DESIGNED BY: DI Revised G-8-05 DATE: SEPTEMBER 23, 2004 CHECKED BY: JI

ADDENDUM TS-