

STA. 210+25.00 TO STA. 213+00.00

NOTE:

- 1. SEE THE ROADWAY SCHEDULES AND PLAN AND PROFILE SHEETS FOR THE LOCATION OF BARRIER MEDIAN, CONCRETE MEDIAN, TYPE SB-6.18 (MODIFIED), MOUNTABLE MEDIAN, AND CORRUGATED MEDIAN.
- 2. PROPOSED SIDEWALKS ARE LOCATED INTERMITTENTLY THROUGHOUT THE PROJECT. SEE PLAN AND PROFILE SHEETS FOR LOCATIONS.
- 3. SEE THE LANDSCAPING DETAIL SHEETS FOR THE LOCATIONS OF: TOPSOIL FURNISH AND PLACE, 4", 6", 8", 12", AND 24" SODDING, SALT TOLERANT SEEDING, CLASS 2A AND SEEDING, CLASS 4

LEGEND


- PROPOSED
- 1) PCC PAVEMENT 10" (JOINTED)
- (2) AGGREGATE SUBGRADE 12"
- (3) CONCRETE MEDIAN, TYPE SB-6.18 (MODIFIED) (SEE DETAIL A)
- (4) COMBINATION CONCRETE CURB AND GUTTER, TYPE B-6.18
- (5) COMBINATION CONCRETE CURB AND GUTTER, TYPE B-6.24
- (6) CONCRETE MEDIAN SURFACE, 4 INCH
- (7) AGGREGATE BACKFILL (INCLUDED IN THE COST OF CONCRETE MEDIAN SURFACE)
- (8) PORTLAND CEMENT CONCRETE SIDEWALK
- (9) LONGITUDINAL CONSTRUCTION JOINT, NO. 8 EPOXY COATED TIE 24" LONG AT 24" CENTERS
- (10) LONGITUDINAL SAWED JOINT, NO. 6 EPOXY COATED TIE BARS 30" BARS LONG AT 30" CENTERS
- (11) LONGITUDINAL CONSTRUCTION JOINT, NO. 6 EPOXY COATED TIE BARS 24" LONG AT 24" CENTERS, DRILL AND GROUT (INCLUDED IN THE COST OF COMBINATION CONCRETE CURB AND GUTTER, CONCRETE MEDIAN AND CORRUGATED MEDIAN)
- (12) EROSION CONTROL BLANKET (FOR USE ON ALL SEEDED AREAS)

COUNTY TOTAL SHEET NO.

CONTRACT NO. 60477

DUPAGE 781

- (13) TOPSOIL FURNISH AND PLACE, 4" (SEE NOTE 3)
- 4) SODDING, SALT TOLERANT (SEE NOTE 3)
- (15) POROUS GRANULAR EMBANKMENT, SUBGRADE
- (16) PORTLAND CEMENT CONCRETE PAVEMENT 10 1/4" (JOINTED)
- (17) STABILIZED SUBBASE HOT-MIX ASPHALT, 4 1/2"

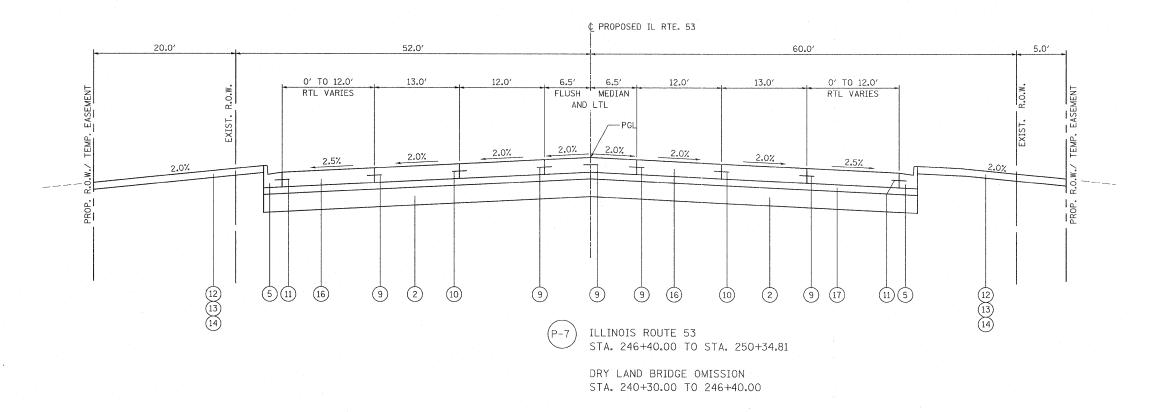

Illinois Department of Transportation

SCALE: NA

4970 VARSITY DRIVE

LISLE. IL 60532