


P-23 THORNDALE AVE.
 STA. 11+00.82 TO STA. 12+45.64
 STA. 17+45.50 TO STA. 20+13.11

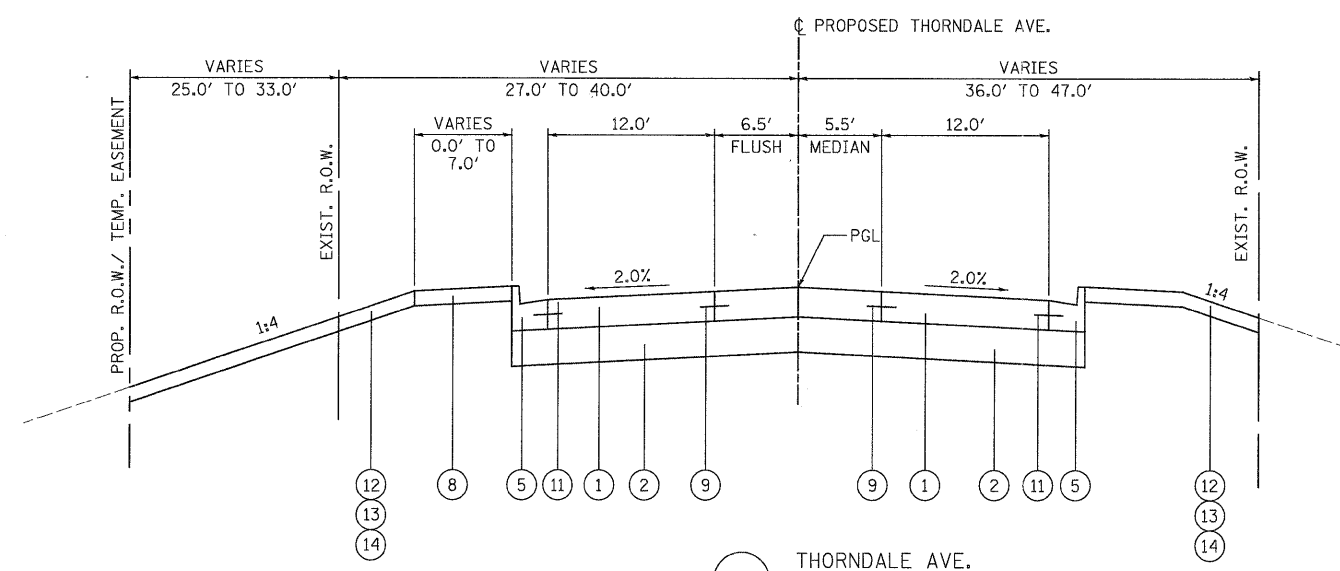

P-24 THORNDALE AVE.
 STA. 12+45.64 TO STA. 15+00.00

NOTE:
 1. SEE THE LANDSCAPING DETAIL SHEETS FOR THE LOCATIONS OF:
 TOPSOIL FURNISH AND PLACE, 4", 6", 8", 12", AND 24"
 SODDING, SALT TOLERANT
 SEEDING, CLASS 2A AND SEEDING, CLASS 4

- LEGEND
- PROPOSED**
- ① PCC PAVEMENT 10" (JOINTED)
 - ② AGGREGATE SUBGRADE 12"
 - ③ CONCRETE MEDIAN, TYPE SB-6.18 (MODIFIED) (SEE DETAIL A)
 - ④ COMBINATION CONCRETE CURB AND GUTTER, TYPE B-6.18
 - ⑤ COMBINATION CONCRETE CURB AND GUTTER, TYPE B-6.24
 - ⑥ CONCRETE MEDIAN SURFACE, 4 INCH
 - ⑦ AGGREGATE BACKFILL (INCLUDED IN THE COST OF CONCRETE MEDIAN SURFACE)
 - ⑧ PORTLAND CEMENT CONCRETE SIDEWALK
 - ⑨ LONGITUDINAL CONSTRUCTION JOINT, NO. 8 EPOXY COATED TIE 24" LONG AT 24" CENTERS
 - ⑩ LONGITUDINAL SAWED JOINT, NO. 6 EPOXY COATED TIE BARS 30" BARS LONG AT 30" CENTERS
 - ⑪ LONGITUDINAL CONSTRUCTION JOINT, NO. 6 EPOXY COATED TIE BARS 24" LONG AT 24" CENTERS, DRILL AND GROUT (INCLUDED IN THE COST OF COMBINATION CONCRETE CURB AND GUTTER, CONCRETE MEDIAN AND CORRUGATED MEDIAN)
 - ⑫ EROSION CONTROL BLANKET (FOR USE ON ALL SEEDED AREAS)
 - ⑬ TOPSOIL FURNISH AND PLACE, - 4" (SEE NOTE 1)
 - ⑭ SODDING, SALT TOLERANT (SEE NOTE 1)
 - ⑮ POROUS GRANULAR EMBANKMENT, SUBGRADE
- PAVEMENT WIDENING AND RESURFACING
 ARMY TRAIL ROAD AND IRVING PARK ROAD**
- ⑯ POLYMERIZED HOT-MIX ASPHALT SURFACE COURSE, MIX "F", N90 - 1 3/4"
 - ⑰ POLYMERIZED LEVELING BINDER (MACHINE METHOD), IL-4.75, N50 - 3/4"
 - ⑱ HOT-MIX ASPHALT BASE COURSE, 12 1/4"
- PAVEMENT WIDENING AND RESURFACING
 (ALL OTHER SIDESTREETS)**
- ⑯ HOT-MIX ASPHALT SURFACE COURSE, MIX "D", N70 - 1 1/2"
 - ⑰ POLYMERIZED LEVELING BINDER (MACHINE METHOD), IL-4.75, N50 - 3/4"
 - ⑱ HOT-MIX ASPHALT BASE COURSE, 9 1/4"

Q:\DOT\9356_A06(1153)\Drawings\CADD Sheets\DI9139797-aht-typical_258-063.dgn