CONTRACT NO. 98963

| F.A.I. RTE. | SECTION | COUNTY | TOTAL SHEETS | SHEET NO. |
|---|---|---|---|---|
| 57/64 | (41-3)HBK | JEFFERSON | 518 | 246 |
| STA. | TO STA. | | | |
| FED. ROAD DIST. NO. | ILLINOIS | FED. AID PROJECT | | |

## SIGN NO. 7
STA 674+00 RT ℄ I57/I64

9.0" Radius, 2.0" Border, White on Green;
"EXIT" E Mod 2K; "94" E Mod 2K;
9.0" Radius, 2.0" Border, White on Green;
"Veterans" E Mod 2K; "Memorial Dr" E Mod 2K; "½" E Mod 2K; "MILE" E Mod 2K;
Table of letter and object lefts.

| | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| E 95.8 | X 104.5 | I 115.4 | T 119.1 | 9 14.5 | 5 156.9 | | | | | | | |
| V 37.3 | e 54.4 | t 68.1 | e 80.1 | r 95.6 | a 105.0 | n 123.0 | d 138.3 | | | | | |
| M 15.6 | e 34.5 | m 50.0 | o 72.6 | r 88.5 | i 100.3 | a 108.5 | l 125.4 | D 144.6 | r 162.4 | | | |
| ½ 58.4 | M 94.4 | I 106.4 | L 111.3 | E 120.3 | | | | | | | | |

## SIGN NO. 9
STA 690+00 RT ℄ I57/I64

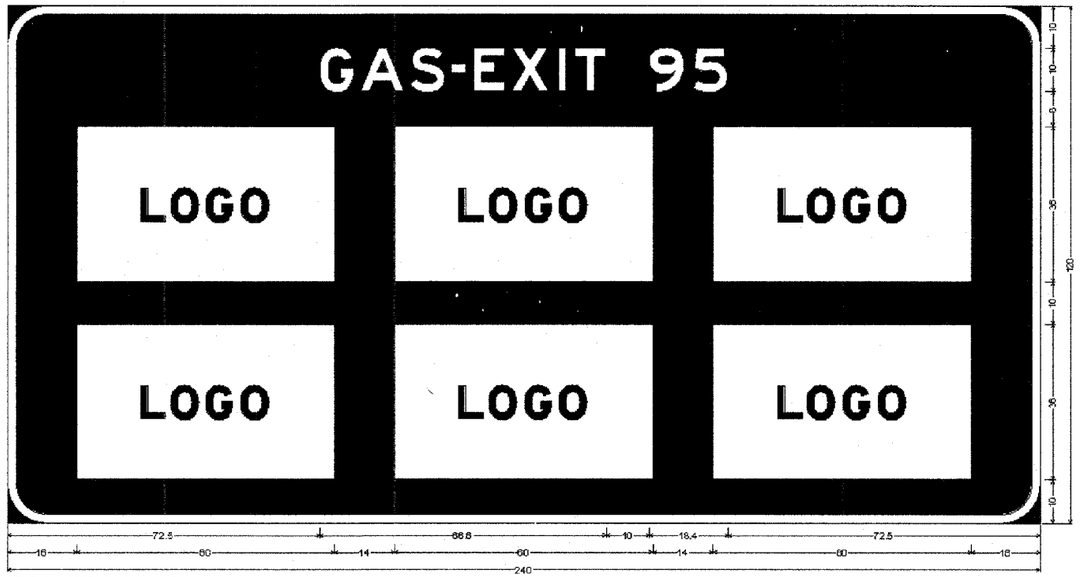


9.0" Radius, 2.0" Border, White on Blue;
"GAS-EXIT 95" E Mod 2K;
Table of letter and object lefts.

| | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|
| G 72.5 | A 82.0 | S 93.8 | - 103.1 | E 108.4 | X 117.1 | I 128.0 | T 131.8 | 9 149.1 | 5 159.4 | |
| □ 18.0 | □ 90.0 | □ 164.0 | | | | | | | | |
| □ 18.0 | □ 90.0 | □ 164.0 | | | | | | | | |

## SIGN NO. 9A
STA 690+00 RT ℄ I57/I64

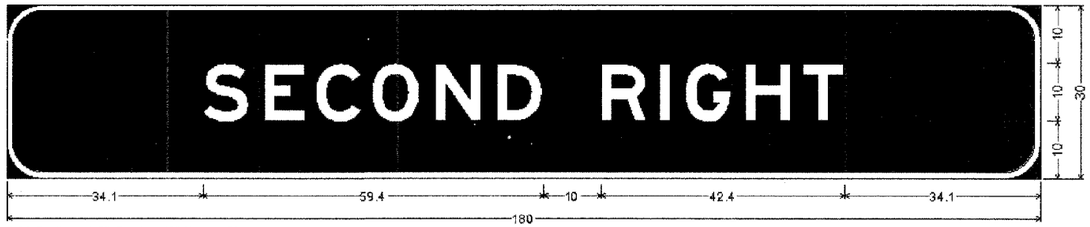


6.0" Radius, 1.0" Border, White on Blue;
"SECOND RIGHT" E Mod 2K;
Table of letter and object lefts.

| | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| S 34.1 | E 44.8 | C 53.8 | O 63.8 | N 74.5 | D 85.4 | R 103.5 | I 113.8 | G 118.1 | H 128.6 | T 138.5 | |

## DETAIL
SIGN #7

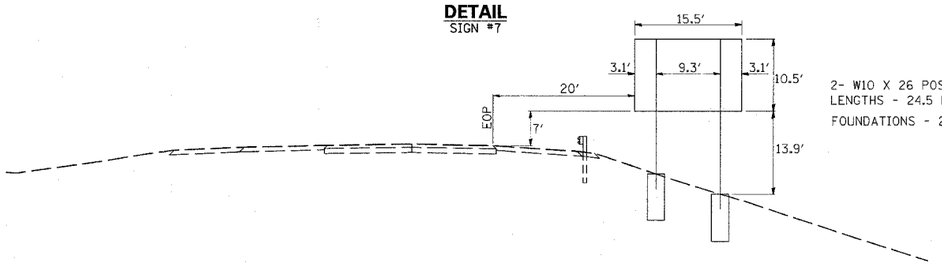


2- W10 X 26 POSTS
LENGTHS - 24.5 FT, 27.4 FT
FOUNDATIONS - 2.5′ DIA., 7′ DEEP, 1.41 CU YD EACH

## DETAIL
SIGN #9 AND #9A

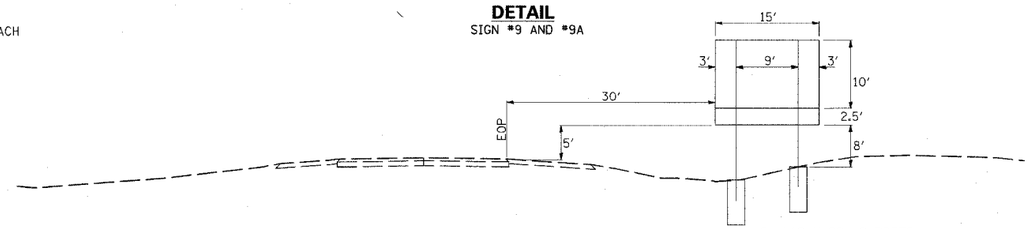


2- W10 X 22 2 POSTS
LENGTHS - 23.4 FT, 21.4 FT
FOUNDATIONS - 2.5′ DIA., 6.5″ DEEP, 1.18 CU YD EACH

PLOT DATE = 03\22\2007 02:33 PM
FILE NAME = I:\98_jobs\98s2015\IDOT RAMPS\revised.sd32
PLOT SCALE = 50.0000 ' / IN.
USER NAME = RLT