

ROUTE	SECTION	COUNTY	TOT. SHTS.	SHT.
FAS 824	04-00185-00-RS	JEFFERSON	2	1
JEFFERSON COUNTY				

CONTRACT 99298

STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION

INDEX OF SHEETS

- COVER SHEET, LOCATION MAP, SCHEDULE OF QUANTITIES
- GENERAL NOTES, TYPICAL EXISTING AND PROPOSED CROSS-SECTIONS, HOT-MIX ASPHALT BREAKDOWN, STRIPING, DETAILS OF SIDE ROADS, PRIVATE ENTRANCES AND MAILBOX TURNOUTS


STANDARDS

- 000001-04
- 442201-02
- 701006-02
- 701306-01
- 701311-02
- 701336-04
- 702001-06
- 780001-01
- B.L.R. 21-6
- B.L.R. 22-4


PLANS FOR PROPOSED FEDERAL AID SECONDARY PROJECT

FAS 824, FAS 830 C.H. 5, 6, 42
JEFFERSON COUNTY
SECTION 04-00185-00-RS
PROJECT# RS-824 (105)
JOB C-99-586-06

MILLING AREA DETAIL
REMOVAL AND REPLACEMENT




PLAN VIEW



PROFILE

SCHEDULE OF QUANTITIES			
Quantity	Unit	Item	Code No.
2284	FOOT	SHORT TERM PAVEMENT MARKING REMOVAL	XX003140
363	SQ. YD.	COLD MILLING	20010700
430	TON	AGGREGATE SURFACE COURSE, TYPE B	40200800
5414	GALLON	BITUMINOUS MATERIALS, (PRIME COAT)	40600100
3153	TON	LEVELING BINDER (MACHINE METHOD), N50	40600525
5819	TON	HOT MIX ASPHALT SURFACE COURSE, MIX "C", N50	40603310
49	SQ. YD.	CLASS D PATCHES, TYPE II, 9 INCH	44201753
113	SQ. YD.	CLASS D PATCHES, TYPE III, 9 INCH	44201757
132	SQ. YD.	CLASS D PATCHES, TYPE IV, 9 INCH	44201759
52222	SQ. YD.	AREA REFLECTIVE CRACK CONTROL TREATMENT, SYSTEM A	44300300
1474	TON	AGGREGATE SHOULDERS, TYPE B	48101200
1	L. SUM	MOBILIZATION	67100100
1	L. SUM	TRAFFIC CONTROL AND PROTECTION, STANDARD 701306	70100460
1	L. SUM	TRAFFIC CONTROL AND PROTECTION, STANDARD 701336	70100600
4568	FOOT	SHORT-TERM PAVEMENT MARKING	70300100
74620	FOOT	THERMOPLASTIC PAVEMENT MARKING LINE 4"	78000200

* SPECIALTY ITEM

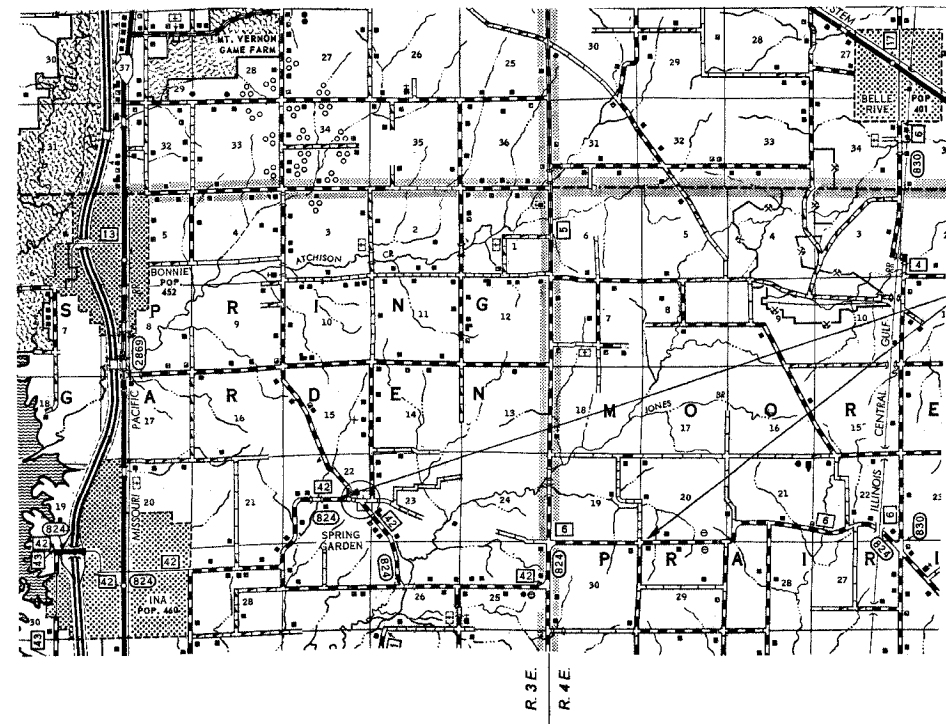

SCALE 1"=1 MI.
N

SECTION 04-00185-00-RS
BEGINS STA. 441+00
ENDS STA. 676+00

J. U. L. I. E.
JOINT UTILITY LOCATING
INFORMATION FOR EXCAVATION
1-800-892-0123
WWW.ILLINOIS1CALL.COM

TOTAL SECTION LENGTH= 23,500'=4.451 MILES
OMISSION=0.00'
NET LENGTH=23,500'=4.451 MILES

FUNCTIONAL CLASSIFICATION=LOCAL ROAD
DESIGN SPEED=50MPH ADT=330

APPROVED April 2 2007

Steve Schaub
COUNTY ENGINEER
JEFFERSON COUNTY HIGHWAY DEPT.
750 OLD FAIRFIELD RD.
MT. VERNON, IL. 62864
PH. (618)244-8031
LICENSE EXP. 11-30-07

PASSED April 4 2007

Dennis W. Hill
DISTRICT NINE ENGINEER OF
LOCAL ROADS AND STREETS

Releasing for
bid based on
limited review 4-4 2007

Mary C. Lewis
DEPUTY DIRECTOR OF HIGHWAYS
REGION FIVE ENGINEER

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION