



NOTEC

- EXPANSION JOINTS SHALL BE CONSTRUCTED AS SHOWN ON THE DETAILS FOR P.C.C. SIDEWALK.
- 2. THE CURB BETWEEN ADJACENT DRIVEWAYS SHALL BE FULL HEIGHT FOR A DISTANCE OF AT LEAST FOUR 4 FEET (1.2 METERS)
- 3. P.C. CONCRETE DRIVEWAYS SHALL BE CONSTRUCTED AT LOCATIONS SHOWN ON THE PLANS OR AS DIRECTED BY THE ENGINEER.
- 4. ¾4" (20) PREFORMED EXPANSION JOINTS WILL NOT BE PAID FOR SEPARATELY BUT SHALL BE CONSIDERED INCIDENTAL TO P.C.C., DRIVEWAY PAYEMENT 8" (200).
 5. COMBINATION CONC. CURB AND GUTTER SHALL BE
- COMBINATION CONC. CURB AND GUTTER SHALL BE MEASURED STRAIGHT ACROSS THE DRIVEWAY. NO ADDITIONAL COMPENSATION WILL BE ALLOWED FOR THE TRANSITION CURB AND GUTTER.

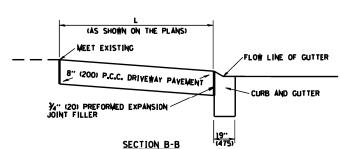

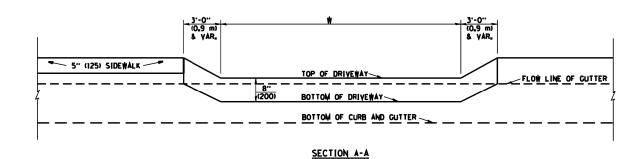

P.C.C. DRIVEWAY PAYEMENT DETAIL

ADJACENT BUILDING, RETAINING WALL OR OTHER STRUCTURE PRIVATE Sidewalk - R.O.W. (20) KEYSTONE-DRIVEWAY SOD (13) (20) SIDEWALK APRON RAMP SIDEWALK TO MEET CURB CURB AND GUTTER -DEPRESSED CURB THE PROPOSED CARRIAGE WALK SHALL BE CONSTRUCTED THE SAME WIDTH AND LENGTH AS THE EXISTING CARRIAGE WALK AND PAID FOR AS PORTLAND CEMENT CONCRETE SIDEWALK, 5-INCHES (125). FIRE HYDRANT PLATFORM TRAFFIC SIGNAL. TROLLEY POWER DEPRESSED CURB POLE, LIGHT STANDARD OR COLUMN TO BE 3'-0" (0.9 m) SOUARE OR FOR OVERHEAD STRUCTURE, AS DIRECTED BY THE ENGINEER. PAVEMENT PAVEMENT -


SIDE WALK 1" (25) PREFORMED EXPANSION JOINT FILLER


SLOPE FOR SIDEWALK 1" (25) IN 3'-0" (0.9 m) IN CHICAGO


NOTES

- ONE-HALF INCH THICK EXPANSION JOINTS SHALL BE PLACED BETWEEN THE SIDEWALK AND ALL STRUCTURES SUCH AS LIGHT STANDARDS, TRAFFIC LIGHT STANDARDS, MANHOLES, WHICH EXTEND THROUGH THE SIDEWALK.
- 2. 34" (20) THICK EXPANSION JOINTS SHALL BE PLACED AT INTERVALS OF NOT MORE
 THAN 100 FEET (30 METERS) IN THE SIDEWALK. WHERE THE SIDEWALK IS CONSTRUCTED ADJACENTTO PAVEMENT OR CURB HAVING EXPANSION JOINTS, THE EXPANSION JOINTS IN THE SIDEWALK
 SHALL BE PLACED OPPOSITE THE EXISTING EXPANSION JOINTS AS NEARLY AS PRACTICABLE,
 EXPANSION JOINTS SHALL ALSO BE PLACED WHERE THE SIDEWALK ABUTS EXISTING SIDEWALKS,
 BETWEEN DRIVEWAY PAVEMENT AND SIDEWALK, AND BETWEEN SIDEWALK AND CURBS WHERE THESIDEWALK ABUTS A CURB.

PORTLAND CEMENT CONCRETE SIDEWALK DETAILS



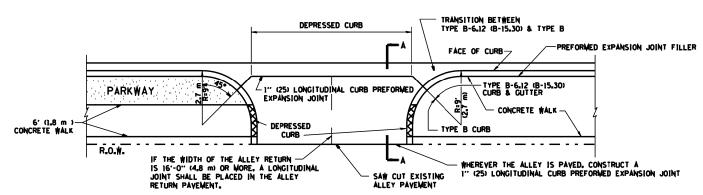

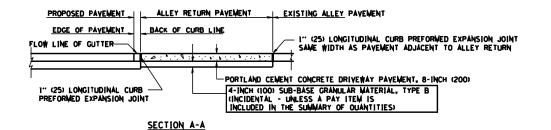

ALLEY RETURN DETAIL

ALL DIMENSIONS ARE IN INCHES (MILLIMETERS) UNLESS OTHERWISE SHOWN

FILE NAME =	USER NAME = pyrzanowskirb	DESIGNED - M. DE YONG	REVISED -		CITY OF CHICAGO	F.A. SECTION	cr	OUNTY S	OTAL	SHEET NO.
c:\pw_work\pwidot\pyrzanowskirb\d0283496	\DistStd.dgn	DRAWN -	REVISED -	STATE OF ILLINOIS		VAR. 2014-0061		COOK	14	11
	PLOT SCALE = 100.0000 '/ in.	CHECKED -	REVISED -	DEPARTMENT OF TRANSPORTATION	DETAILS FOR P.C. CONCRETE DRIVEWAY, ALLEY RETURN AND SIDEWALK	BD400-03 (BD-1		ONTRACT	NO. 60	0×81
	PLOT DATE = 5/22/2014	DATE - 06-13-90	REVISED -		SCALE NONE SHEET NO. 1 OF 1 SHEETS STA. TO STA.		IS FED. AID PROJ			