


MIXTURES TABLE

	POLY HMA SURFACE	POLY HMA BINDER	HMA SHOULDERS 4" FOR STAGING	HMA SHLDS 8" & 10"	TEMPORARY PAVEMENT	HMA SHLDS 6" FOR GUARDRAIL STABILIZATION	HMA SHOULDERS 1 1/2" FOR FINAL LIFT
PG GRADE	SBS-PG70-22	SBS-PG70-22	PG64-22	PG64-22	PG64-22	PG64-22	PG64-22
DESIGN AIR VOIDS	4.0% @ N90	4.0% @ N90	4.0% @ N70	4.0% @ N70	4.0% @ N70	2.0% @ N30	4.0% @ N70
MIXTURE COMPOSITION	IL 9.5	IL 19.0 FG	IL 19.0	IL 19.0	IL 19.0	IL 19.0L	IL 9.5
FRICTION AGGREGATE	MIXTURE D						MIXTURE C
DENSITY TEST METHOD	PFP	PFP	CORES/ CORRELATION	CORES/ CORRELATION	CORES/ CORRELATION	SATISFACTION OF ENGINEER	CORRELATION

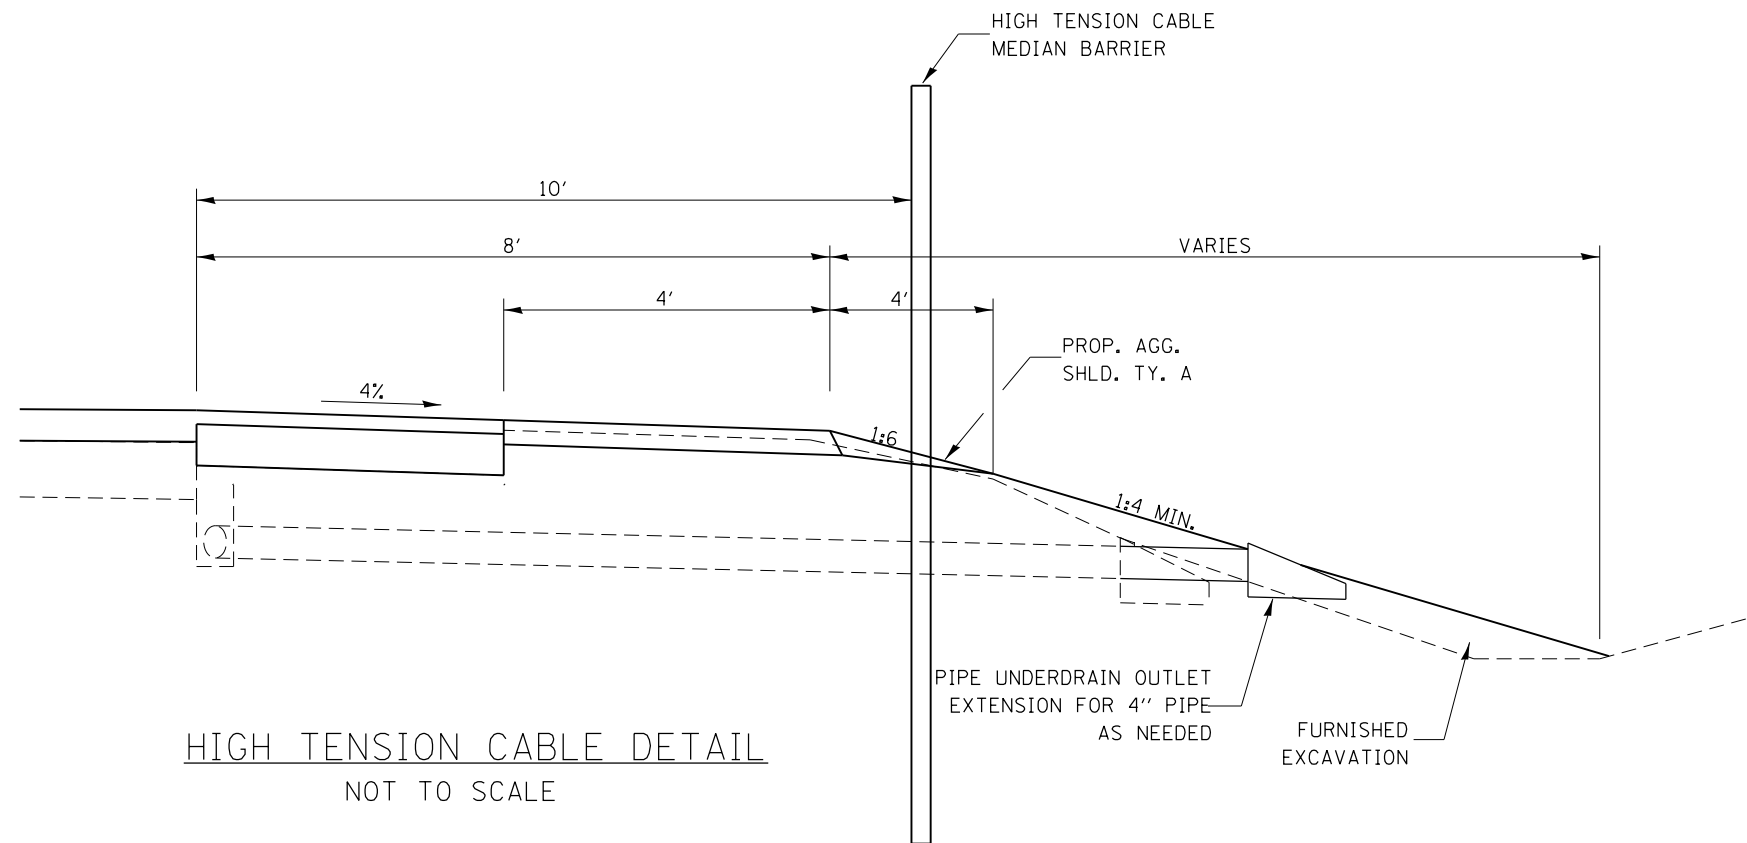

HIGH TENSION CABLE DETAIL
NOT TO SCALE

NOTES

1. SEVERAL LOCATIONS MAY REQUIRE ADDITIONAL FILL TO PROVIDE A MINIMUM 1:4 FORESLOPE. THIS MATERIAL WILL BE PAID FOR AS "FURNISHED EXCAVATION".
2. EXISTING PIPE UNDERDRAIN STRUCTURES MAY NEED TO BE ADJUSTED TO MATCH THE PROPOSED SLOPE, AND WILL BE PAID AS "PIPE UNDERDRAIN OUTLET EXTENSION FOR 4" PIPE".