


**TYPICAL SECTION 1**

STA. 445+17.15 TO STA. 452+15

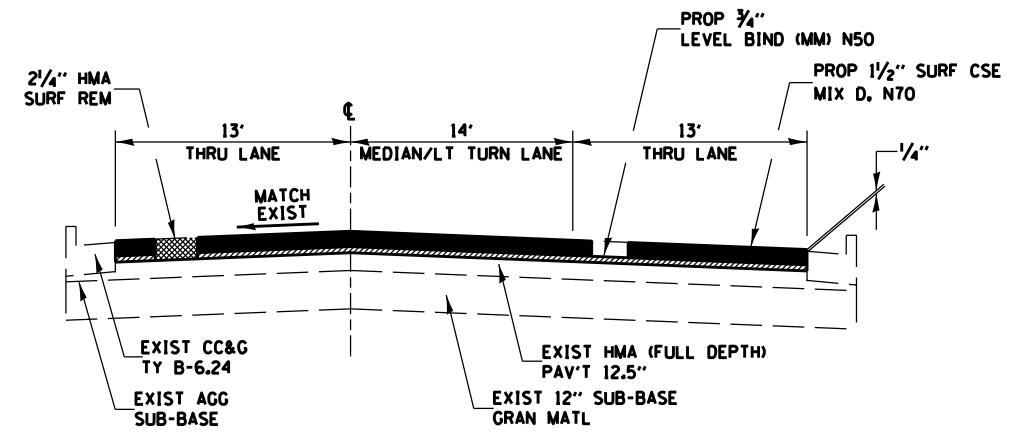


**TYPICAL SECTION 2**

STA. 452+15 TO STA. 454+63.90


| MIXTURES TABLE         |             |                  |              |              |
|------------------------|-------------|------------------|--------------|--------------|
|                        | HMA SURFACE | HMA LEVEL BINDER | HMA SHLDS 6" | HMA PATCHING |
| PG Grade**             | PG 64-22    | PG 64-22         | PG 64-22     | PG 64-22     |
| Design Air Voids       | 4.0% @ N70  | 4.0% @ N50       | 4.0% @ N50   | 4% @ N50     |
| Mixture Composition    | IL 9.5      | IL 9.5FG         | IL 19.0FG    | IL 19.0FG    |
| Friction Aggregate     | MIXTURE D   |                  |              |              |
| Density Control Method | Coorelation | Coorelation      | Cores *      | Cores*       |

\*\*When RAP/RAS ABR exceeds 20 percent, the high and low virgin asphalt binder grades shall each be reduced by one grade (i.e. 25% ABR would require a virgin asphalt binder grade of PG 64-22 to be reduced to PG 58-28).

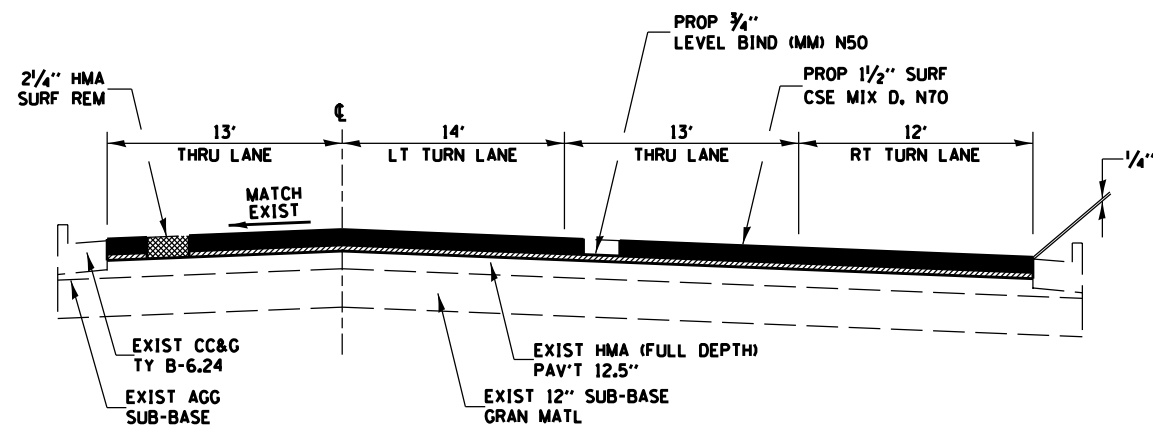

**TYPICAL SECTION 3**

STA. 454+63.90 TO STA. 458+41

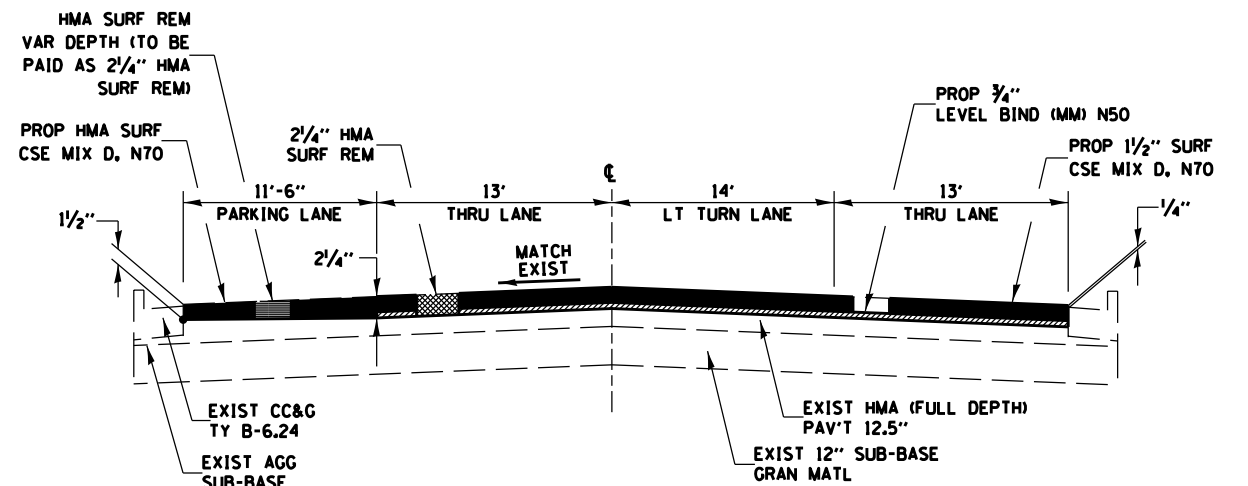

**TYPICAL SECTION 4**

STA. 458+41 TO STA. 462+23