



NOTE:
 WHEN MILLING OPERATIONS PRODUCE A ROUNDED EDGE,
 THEN A SAW CUT SHALL BE USED TO MANUFACTURE
 A PERPENDICULAR EDGE AS SHOWN IN THE DETAIL.
 THE ENGINEER SHALL BE THE SOLE JUDGE
 CONCERNING THE USE OF THIS DETAIL

HMA DETAIL AT BUTT JOINTS

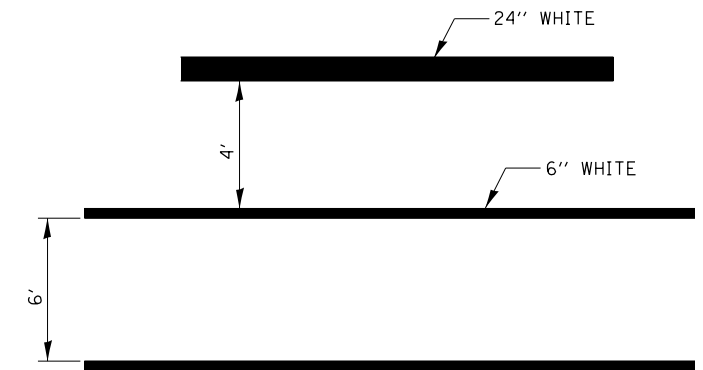


**TYPICAL SPACING DETAIL FOR
CROSSWALKS AND STOP BARS**

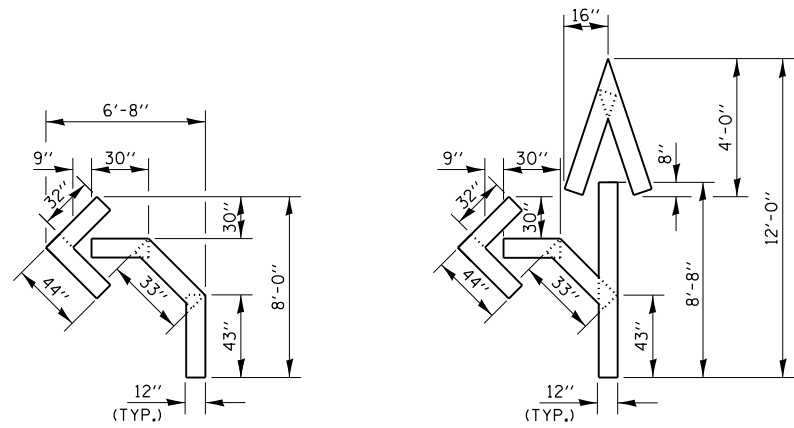


QUANTITY
 12" LINE = 16 LIN. FT.
 OR 4" LINE = 48 LIN. FT.

QUANTITY
 12" LINE = 29 LIN. FT.
 OR 4" LINE = 87 LIN. FT.

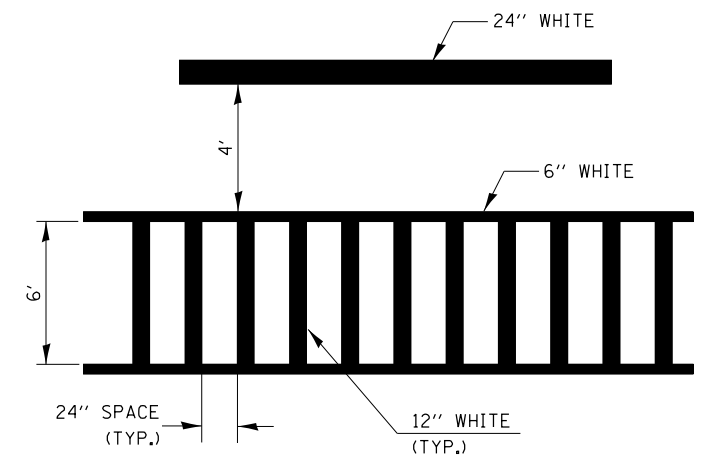

**TYPICAL SPACING DETAIL FOR
CROSSWALKS AND STOP BARS**

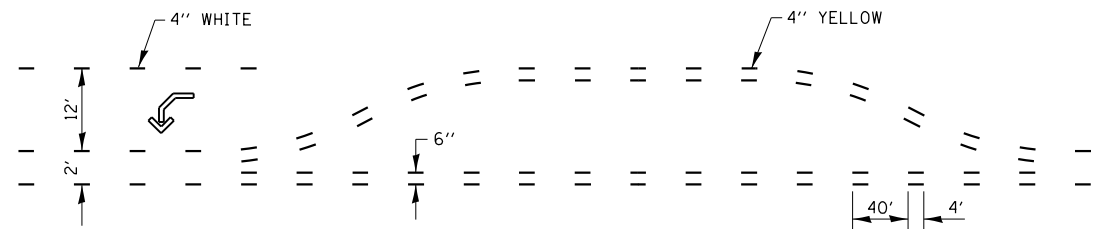

**SHORT-TERM PAVEMENT MARKING
FOR MEDIANS AND ARROWS**

FILE NAME =	USER NAME = duncanbd	DESIGNED -	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	DETAILS			F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.			
et:\pw\work\p\dot\duncanbd\0377300\0386061-sht-details.dgn		DRAWN -	REVISED -		SCALE:	SHEET NO.	OF	SHEETS	STA.	TO STA.	591	(65)RS-1	KENDALL	13	12
		CHECKED -	REVISED -												
		DATE -	REVISED -												
	PLOT SCALE = 100.0000' / in.														
	PLOT DATE = 6/4/2014														
											CONTRACT NO. 66D61				
											ILLINOIS FED. AID PROJECT				