

## INSTALLATION NOTES


- Install continuous seal in roadway, parapet, curb, and sidewalk.
- Install anchor blocks as indicated.

Note A.


Maximum spacing of anchor bolts shall be 12" centers.

## SKEW LIMITATIONS

The details of the anchor blocks and the elastomeric membrane in the parapet, as shown, are for up to  $50^\circ$  skews. For skews greater than 50°, the anchor blocks and the elastomeric membrane, installed according to dimension "D", might require modifications to insure a minimum clearance of 1'2" from centerline of anchor studs to edge of parapet opening. The anchor blocks and the elastomeric membrane shall also be installed to the top of the parapet with the anchor studs spaced at ±12" cts.

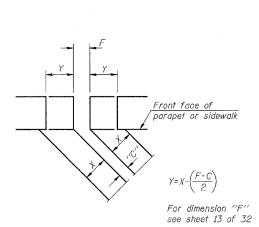

FORMING BLOCKOUT <u>SKETCH</u>

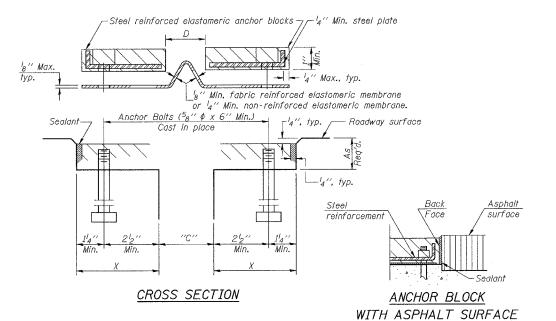

SHEET NO. 19 0910-IBR-84 37 32 sheets KANE 62

Contract #62531 ISTHA Contract #RR-02-5129 ISTHA Bridge No. 1101

## GENERAL NOTES

Continuous Seal Neoprene Expansion Joint shall consist of molded anchor blocks of elastomer and steel, field assembled over continuous lengths of elastomeric membrane.


The elastomeric membrane shall be premoided with a single or a double upward convolution that will have a "memory" to return to its molded position upon joint closure.

The convolution length shall be such that the extended length will not be greater than the manufactured length when the joint is fully expanded in its design range and will not protrude above the anchor blocks when the joint is fully compressed.


Joint openings shall be adjusted according to Article 503.10(c) of the Standard Specifications when the deck is poured at an ambient temperature other than 50° F.

The parapet and roadway membrane shall be made continuous by an approved vulcanizing process. Lapping will not be permitted.


— Countersunk hole for top nut —

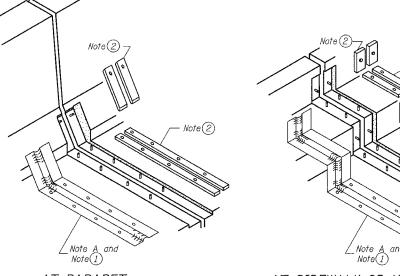




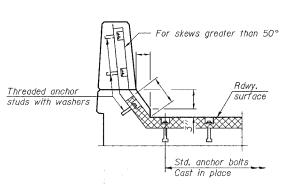


AT PARAPET

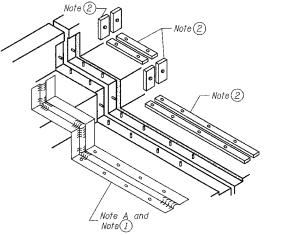

AT SIDEWALK OR MEDIAN

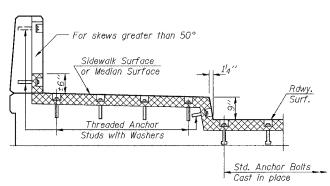

AT SIDEWALK OR MEDIAN TYPICAL END TREATMENTS




AT WALL

Studs with Washers

AT WALL

Note A and Note 1

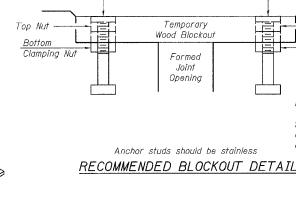

## BILL OF MATERIAL

None Francisco Inint O// Frant	11GIII OTIII TOTAL
Neoprene Expansion Joint 2   Foot   1	ene Expansion Joint 2'' Foot 190



For skews greater than 50°

200 West Front Street Wheaton, II 60187

ILLINOIS DEPARTMENT OF TRANSPORTATION CONTINUOUS SEAL TYPE NEOPRENE EXPANSION JOINTS RTE. 47 OVER I-88 (E-W TOLLWAY) KANE COUNTY STRUCTURE NO. 045-0082

DATE: 2-01-2006

DRAWN BY CHECKED BY WJV

**Rottom** Clamping Nut

Stud needs to be

threaded lower to allow for use of clamping nut.

EJ-CS

Threaded Anchor Studs with Washers

10-22-04

Std. Anchor Bolts

Cast in place

AT CURB