

EROSION CONTROL NOTES

ALL PROPOSED EROSION CONTROL MEASURES SHALL BE COMPLETED AS DETAILED ON THIS EROSION CONTROL PLAN AND IN ACCORDANCE WITH THE SPECIFICATIONS.

EROSION CONTROL MEASURES ARE GOVERNED BY THE ILLINOIS ENVIRONMENTAL PROTECTION AGENCY'S STANDARDS AND SPECIFICATIONS FOR SOIL EROSIONS AND SPECIFICATION FOR SOIL EROSIONS AND SEDIMENT CONTROL.


INSPECTION OF THE DITCH CHECK SHALL BE FREQUENT AND REPAIR/REPLACEMENT SHALL BE MADE PROMPTLY AS NEEDED.

EROSION CONTROL FENCE, AND DITCH CHECKS SHALL BE REMOVED WHEN THEY HAVE SERVED THEIR USEFULNESS SO AS NOT TO BLOCK OR IMPEDE STORM WATER DRAINAGE AND GRASS HAS BEEN ESTABLISHED.

COST OF REMOVAL AND REPLACEMENT SHALL BE INCLUDED IN THE UNIT PRICE FOR ITEM:
 AR156511 DITCH CHECK

LEGEND

- X — EXISTING FENCE
- PROPOSED IMPROVEMENTS
- - - GRADING & SEEDING LIMITS
- PROPOSED DITCH CHECK
- PROPOSED SILT FENCE

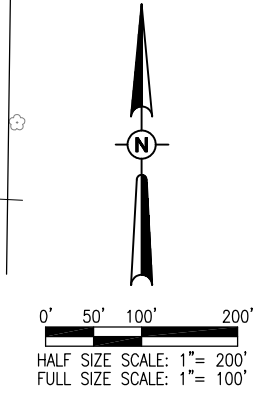

	DATE	REVISION	BY	
<p>SOUTHERN ILLINOIS AIRPORT MURPHYSBORO / CARBONDALE, ILLINOIS</p> <p>ILL. PROJ.: MDH-4173</p>				
Hanson Project No. 11A0037D_0001 Filename: R-005SWPPP.DWG Scale: NOT TO SCALE Date: 04/20/2012				
LAYOUT	USL	02/06/2012		
DRAWN	CWS	03/06/2012		
REVIEWED	USL	04/16/2012		
<p>HANSON Professional Services Inc. 323 New Illinois Murphysboro, IL 62866 Offices Nationwide</p>				
CONSTRUCT PERIMETER ROAD TO SUPPORT ARFF/SRE BUILDING		PROPOSED STORM WATER POLLUTION PREVENTION PLAN		
5				
5 of 51 sheets				