


06-15-2018 LETTING ITEM 077

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

PROPOSED
HIGHWAY PLANS

VARIOUS ROUTES
SECTION DIST 8 ITS 2019-1
MAINTAIN & SERVICE
ALL ITS EQUIPMENT
VARIOUS COUNTIES


C-98-240-18

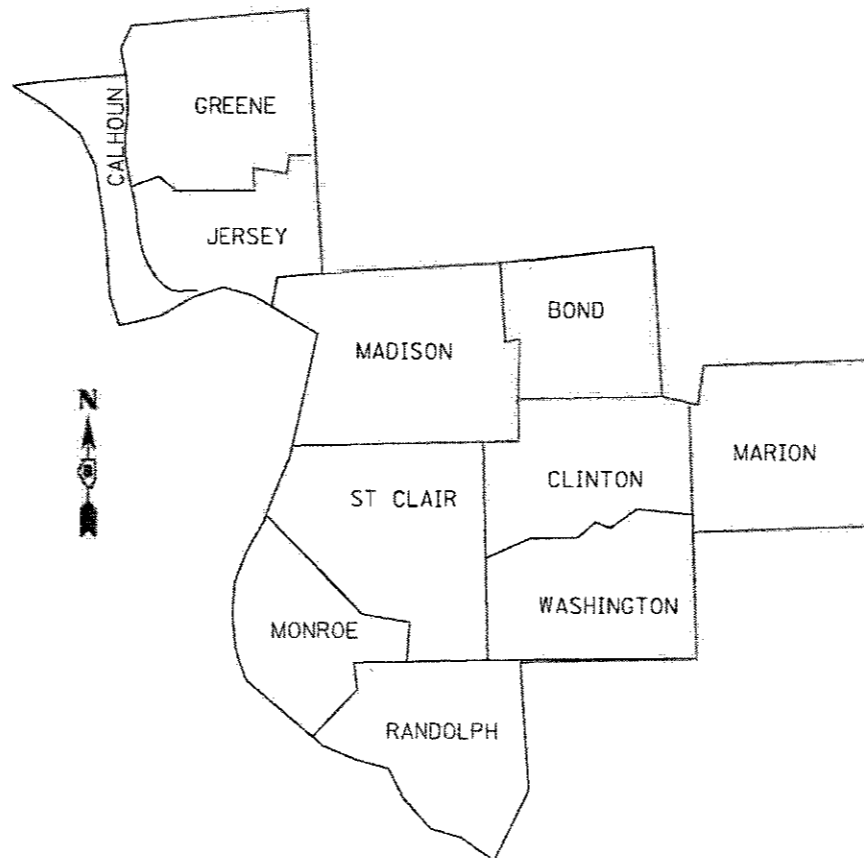

NOTE: WORK CAN BE LOCATED WITHIN ANY OF THE ABOVE NOTED COUNTIES
WITHIN DISTRICT 8/REGION 5.


F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
VAR	DIST 8 ITS 2019-1	VARIOUS	3	1
ILLINOIS			CONTRACT NO. 76L51	

D-98-064-18

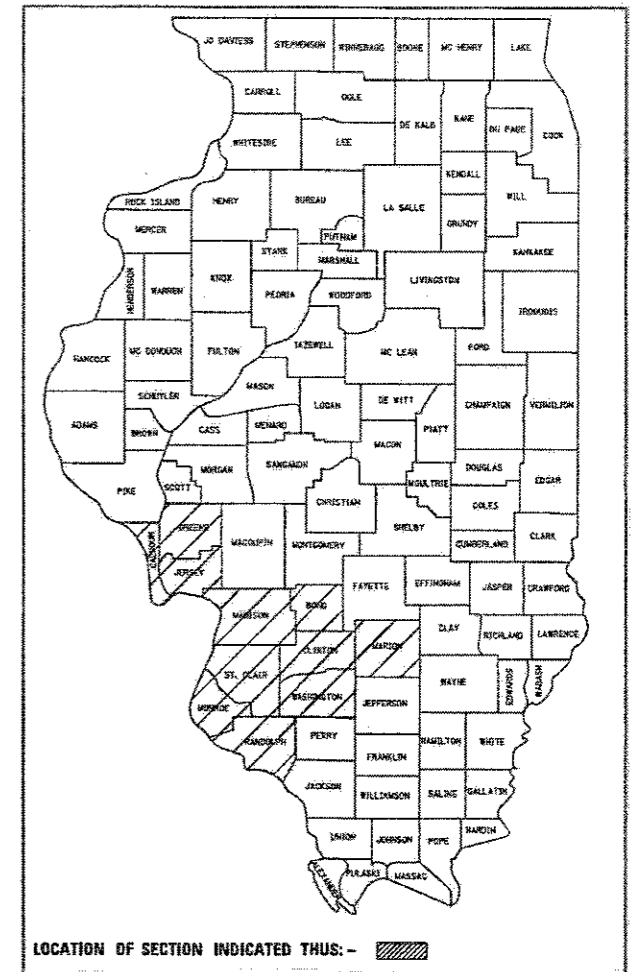

LOCATION OF SECTION INDICATED THUS: - [shaded box]

INDEX OF SHEETS:
1 - COVER SHEET
2 - SUMMARY OF QUANTITIES
3 - GENERAL NOTES/WORK ORDER FORM

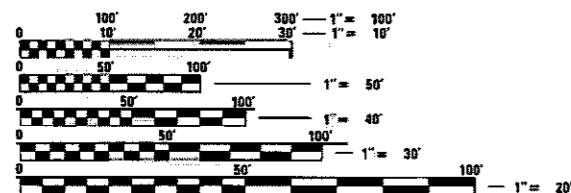

FULL SIZE PLANS HAVE BEEN PREPARED USING STANDARD ENGINEERING SCALES. REDUCED SIZED PLANS WILL NOT CONFORM TO STANDARD SCALES. IN MAKING MEASUREMENTS ON REDUCED PLANS, THE ABOVE SCALES MAY BE USED.

J.U.L.I.E.
JOINT UTILITY LOCATION INFORMATION FOR EXCAVATION
1-800-892-0123
OR 811

PROJECT ENGINEER: HERVE GELIN (618) 346-3179
SQUAD LEADER: CECIL DOWNING (618) 346-3145

CONTRACT NO. 76L51

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION
SUBMITTED March 20, 2018
Jeffrey Z. K... REGIONAL ENGINEER
May 11, 2018
A. Elk ENGINEER OF DESIGN AND ENVIRONMENT
May 19, 2018
Paul P. Ch... DIRECTOR OF HIGHWAYS PROJECT IMPLEMENTATION

PRINTED BY THE AUTHORITY
OF THE STATE OF ILLINOIS

GENERAL NOTES

1. THE LOCATIONS OF THE REPAIR AREAS SHALL BE DETERMINED BY THE ENGINEER.
2. NO MATERIAL SHALL BE LEFT ON OR NEAR THE ROADWAY DURING NON-WORKING HOURS.
3. ANY NECESSARY TRAFFIC CONTROL WILL BE PROVIDED BY THE CONTRACTOR; APPROPRIATE STANDARDS ARE LISTED BELOW.
4. ILLINOIS STATE LAW REQUIRES A 48-HOUR NOTICE TO BE GIVEN TO UTILITIES BEFORE DIGGING. FIELD MARKING OF FACILITIES MAY BE OBTAINED BY CONTACTING J.U.L.I.E. (PHONE: 800 892-0123) OR FOR NON-MEMBER, THE UTILITY COMPANY DIRECTLY.
5. A FLAGGER SHALL BE REQUIRED AT ALL TIMES WHEN WORKERS OR EQUIPMENT ARE ENCROACHING ON THE LANE OF TRAFFIC.
6. WHEN NO WORK IS BEING PERFORMED, THE FLAGGERS WILL NOT BE REQUIRED. IF THE FLAGGERS ARE NOT PRESENT, THE FLAGGER SIGNS SHALL BE REMOVED OR COVERED.
7. UTILITY INTERFERENCES ARE NOT ANTICIPATED ON THIS CONTRACT. IT SHALL BE THE CONTRACTORS RESPONSIBILITY TO COORDINATE HIS CONSTRUCTION ACTIVITIES WITH THE VARIOUS UTILITY OWNERS. ALL POTENTIAL CONFLICTS SHALL BE INVESTIGATED AND REMEDIAL ACTION TAKEN PRIOR TO INTERRUPTION OF THE CONTRACTORS PROGRESS. NO ADDITIONAL COST SHALL BE ADDED TO THE CONTRACT RESULTING FROM UTILITY CONFLICTS.
8. ALL EXCAVATION ADJACENT TO THE EDGE OF PAVEMENT SHALL BE PROTECTED WITH THE EXTENDED LEG BARRICADES AND THE APPROPRIATE LIGHTS.
9. 45 & 55 MPH SIGNS ARE INCLUDED IN ALL INTERSTATE LANE CLOSURES. IF THE LANE CLOSURE DURATION IS LESS THAN 4 HOURS, THE 45 & 55 MPH SIGNS ARE NOT REQUIRED.
10. ANY WORK ORDER MAY BE CANCELLED AT THE ENGINEER'S DISCRETION.
11. NO OVERNIGHT LANE CLOSURES WILL BE ALLOWED.

HIGHWAY STANDARDS

701001-02	701400-09	701451-05
701006-05	701401-11	701456-05
701106-02	701406-11	701601-09
701201-04	701421-08	701606-10
701206-04	701422-10	701701-10
701301-04	701446-09	701901-07



Work Order ITS 1

Requested By: _____ **Date:** _____ **Time:** _____

Assigned To: _____ **Received From:** _____

Estimated Cost: _____

Location: _____

Problem:

Ref/Accident #: _____ **Claim #:** _____

Remarks: _____

Completed By: _____ **Date/Time Completed:** _____

FILE NAME =	USER NAME = washington	DESIGNED -	REVISED -
pw:\IL084EBIDINTEG\illinois.gov\PWIDOT\Documents\DOT Offices\District 8\Projects\0876\DRAWING\DATA\CADsheets\0876L51-shr-gennote		CHECKED -	REVISED -
	PLOT SCALE = 5000.0000 / in.	DATE -	REVISED -
	PLOT DATE = 3/16/2018		

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

GENERAL NOTES/
TYPICAL WORK ORDER FORMS

SCALE: SHEET NO. OF SHEETS STA. TO STA.

F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
VAR	DIST 8 ITS 2019-1	VARIOUS	3	3
CONTRACT NO. 76L51				
FED. ROAD DIST. NO. ILLINOIS FED. AID PROJECT				