



F. A. U. NO.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
	06-00026-00-PV	COOK	11	3
STA.	TO STA.			
FED. ROAD DIST. NO.	BLADE	FED. AID PROJECT	HPP-3013(001)	

CONTRACT NO. 83958

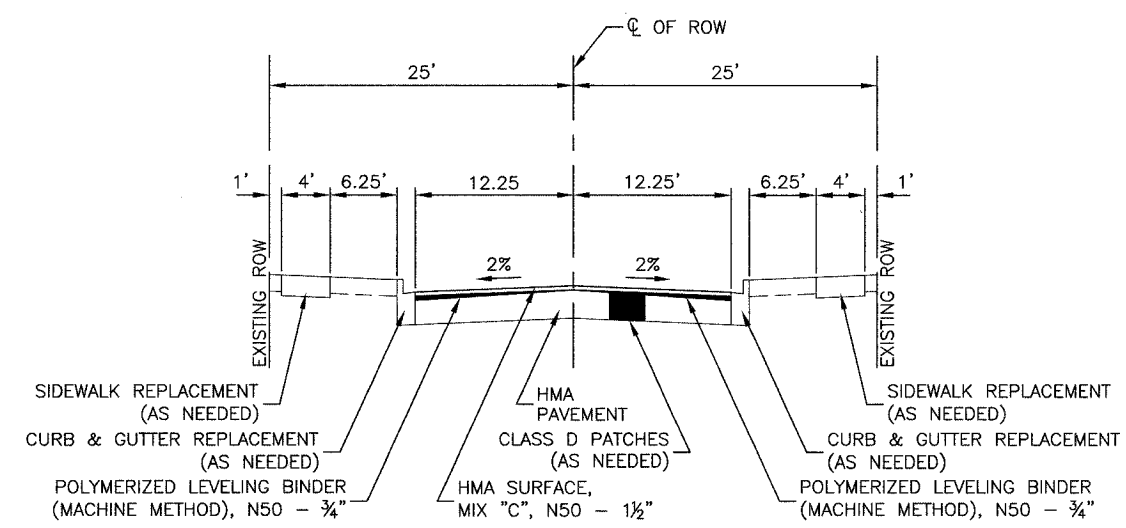

PROPOSED TYPICAL SECTION
VARIOUS STREETS

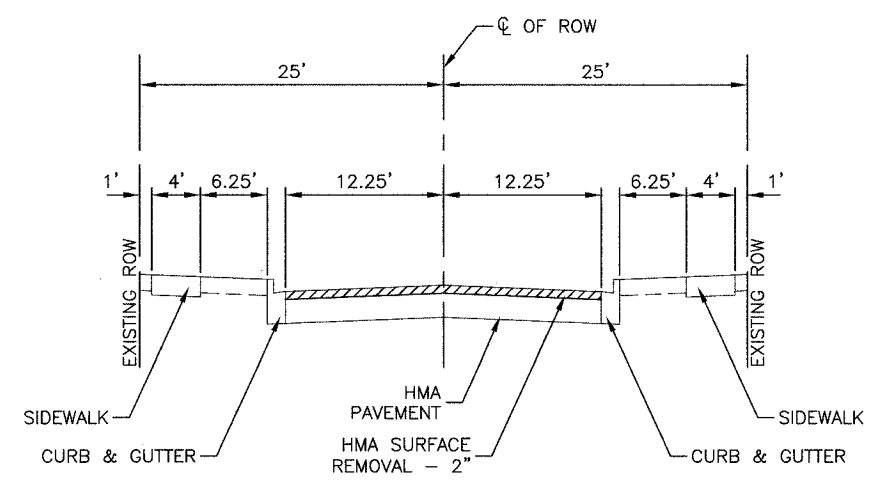

EXISTING TYPICAL SECTION
VARIOUS STREETS

HOT-MIX ASPHALT MIXTURE REQUIREMENTS

MIXTURE TYPE	AC TYPE	VOIDS
HOT-MIX ASPHALT SURFACE COURSE, MIX C, N50 (IL-9.5mm)	PG 64-22	4% @ 50 GYR
POLYMERIZED LEVELING BINDER (MACHINE METHOD), N50 (IL-4.75mm)	SBS/SBR PG 76-28/-22	4% @ 50 GYR
CLASS D PATCHES, TYPE II, III, IV, 6 INCH (BINDER IL-19MM)	*PG 64-22	4% @ 70 GYR
DRIVEWAYS		
HOT-MIX ASPHALT SURFACE COURSE, MIX 'C', N50 (IL 9.5mm)-2"	PG 64-22	4% @ 50 GYR
HOT-MIX ASPHALT BASE COURSE (BINDER IL-19 mm); PE-6", CE-8"	*PG 64-22	4% @ 50 GYR

- NOTE:
1. THE UNIT WEIGHT USED TO CALCULATE ALL HOT-MIX ASPHALT SURFACE MIXTURE QUANTITIES IS 112 LBS/SY/IN.
 2. *WHEN RAP EXCEEDS 20%, THE NEW ASPHALT BINDER IN THE MIX SHALL BE PG 58-22.

REVISIONS	
NAME	DATE

ILLINOIS DEPARTMENT OF TRANSPORTATION
VARIOUS STREETS
TYPICAL CROSS SECTIONS

SCALE: VERT. NA
HORIZ. NA
DATE 03/22/07

DRAWN BY JZ
CHECKED BY WD