
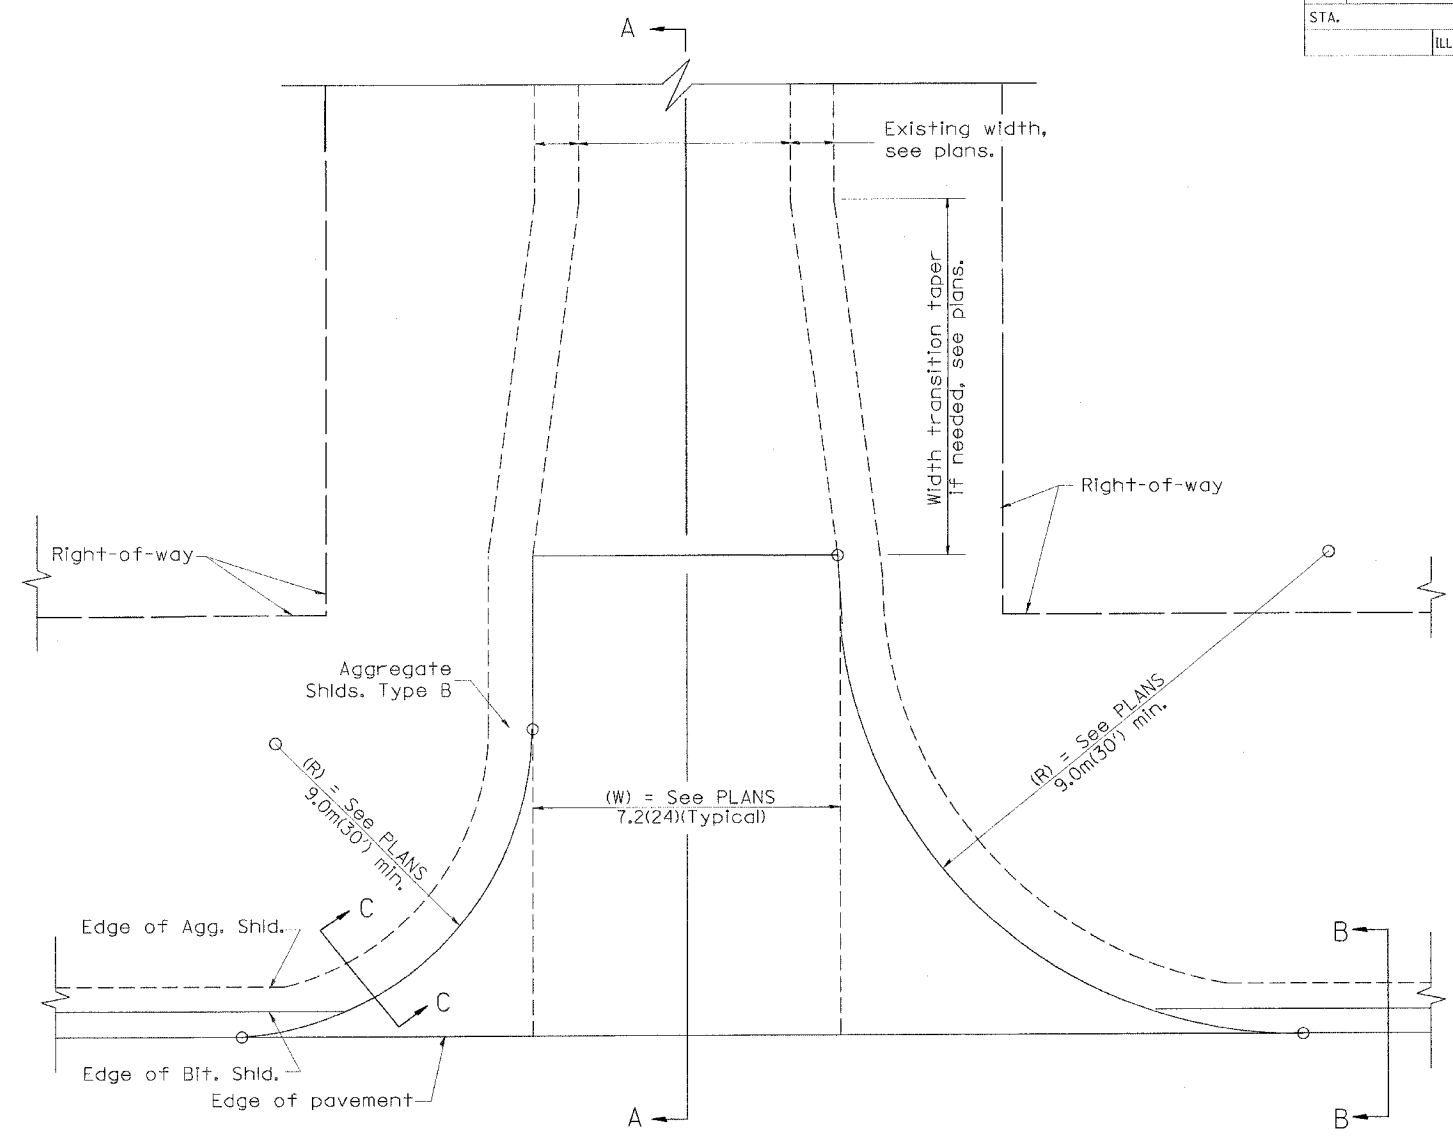
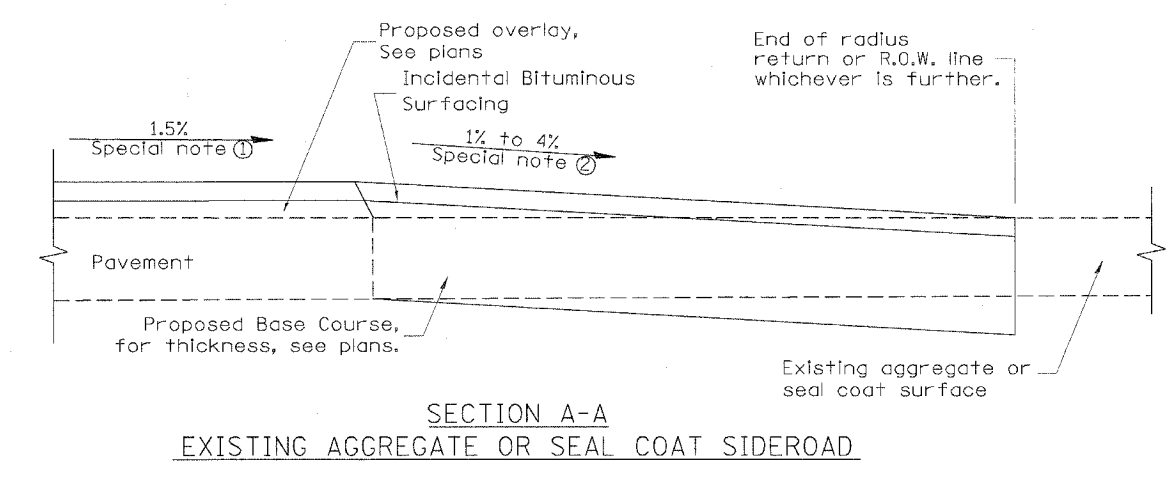




CONTRACT NO. 68430				
F.A.S. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
1379	(108-B-1) BR	STARK	43	27
STA.	TO STA.			
	ILLINOIS		IL RTE 91	

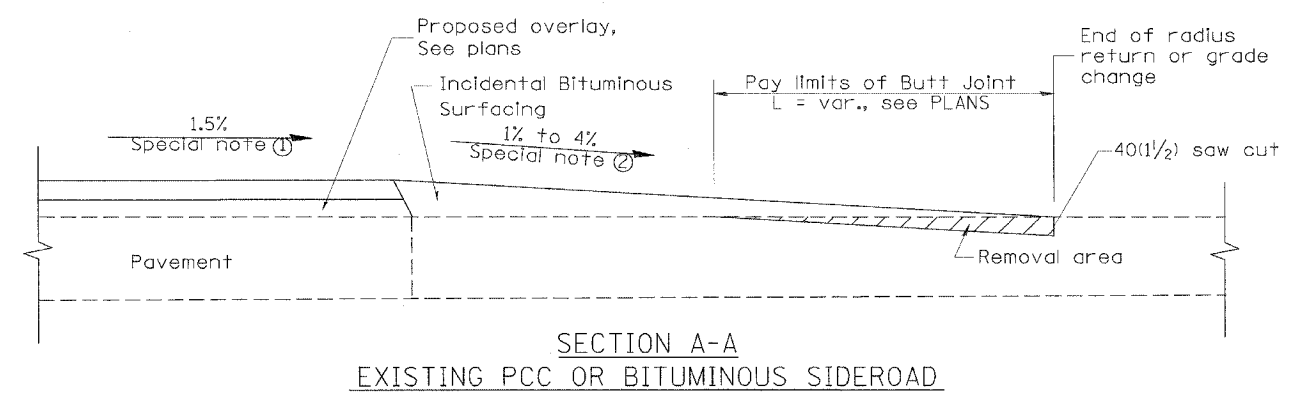

PLAN

SPECIAL NOTES

- ① The mainline pavement cross-slope is 1.5% for tangent alignment. See Plans for cross-slope on superelevated horizontal curves.
- ② The sideroad profile should drain away from the mainline at 1% to 4% for 15.0m(50') to 30.0m(100'), or as a minimum to the end of the radius return. When the sideroad is on the high side of a mainline superelevated curve, - 2% maximum should be provided in order to minimize breakover at the pavement edge. See plans for sideroad profiles.

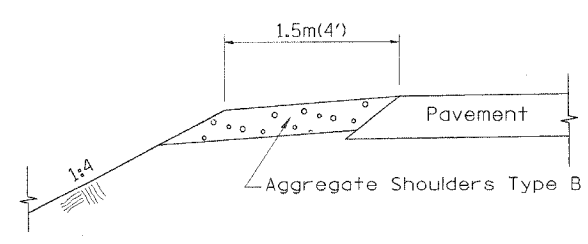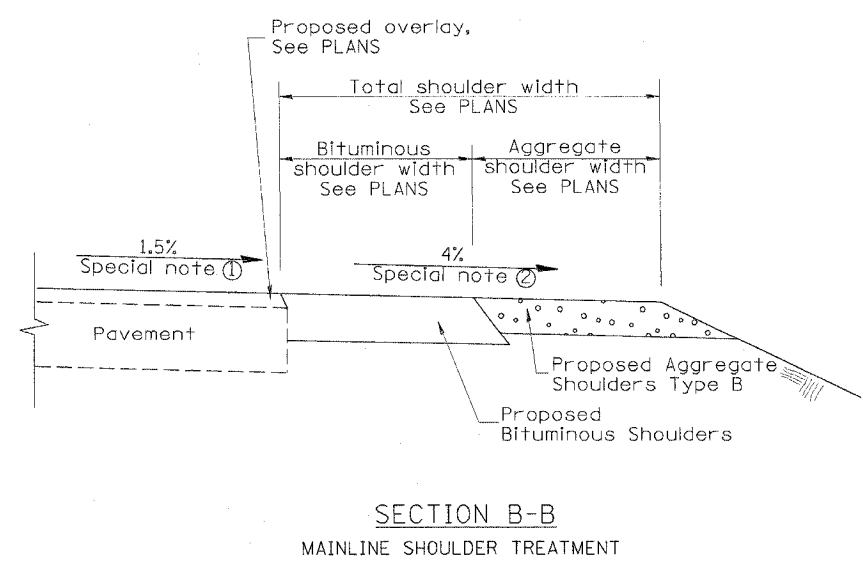

SECTION C-C
SIDEROAD SHOULDER TREATMENT

All dimensions are in millimeters (inches) unless otherwise noted.

ILLINOIS DEPARTMENT OF TRANSPORTATION
DISTRICT CADD STANDARD

DATE	REVISIONS	BY
1-1-97	RENUM. C-105.02, NEW REVISION BOX	T.P.
7-1-97	REVISE DESIGNER NOTES	J.A.

RURAL SIDEROADS FOR
"3R" PROJECTS

CADD STD NO. 406401-D4
SCALE: NOT DRAWN TO SCALE DRAWN BY CADD
DATE **DATE** CHECKED BY: T. PICKERING

DATE