


CONTROL MEASURE GROUP	CONTROL MEASURE	APPL.	KEY	CONTROL MEASURE CHARACTERISTICS	TEMP.	PERM.
VEGETATIVE SOIL COVER	TEMPORARY SEEDING	X	(TS)	PROVIDES QUICK TEMPORARY COVER TO CONTROL EROSION WHEN PERMANENT SEEDING IS NOT DESIRED OR TIME OF YEAR IS INAPPROPRIATE.	X	
	PERMANENT SEEDING	X	(PS)	PROVIDES PERMANENT VEGETATIVE COVER TO CONTROL EROSION, FILTERS SEDIMENT FROM WATER. MAY BE PART OF FINAL LANDSCAPE PLAN.		X
	DORMANT SEEDING		(DS)	SAME AS PERMANENT SEEDING EXCEPT IS DONE DURING DORMANT SEASON. HIGHER RATES OF SEED APPLICATION ARE REQUIRED.	X	X
	SODDING	X	(SO)	QUICK PERMANENT COVER TO CONTROL EROSION. QUICK WAY TO ESTABLISH VEGETATION FILTER STRIP. CAN BE USED ON STEEP SLOPES OR IN DRAINAGEWAYS WHERE SEEDING MAY BE DIFFICULT.	X	X
	GROUND COVER		(GC)	PROVIDES GROUND COVER, SHRUBS AND TREES IN ADDITION TO PERMANENT VEGETATION. MAY BE USED AS PART OF A FINAL LANDSCAPE PLAN ALONG WITH SHRUBS AND TREES.		X
NON VEGETATIVE SOIL COVER	MULCHING		(M)	ADDED INSURANCE OF A SUCCESSFUL TEMPORARY OR PERMANENT SEEDING. CONTROLS UNWANTED VEGETATION AND PRESERVES MOISTURE. PROVIDES COVER WHERE VEGETATION CANNOT BE ESTABLISHED.	X	X
	AGGREGATE COVER		(AG)	PROVIDES SOIL COVER ON ROADS AND PARKING LOTS AND AREAS WHERE VEGETATION CANNOT BE ESTABLISHED. PREVENTS MUD FROM BEING PICKED UP AND TRANSPORTED OFF-SITE.	X	X
	PAVING	X	(P)	PROVIDES PERMANENT COVER ON PARKING LOTS AND ROADS OR OTHER AREAS WHERE VEGETATION CANNOT BE ESTABLISHED.		X
DIVERSIONS	RIDGE DIVERSION		(RD)	TYPICALLY USED ABOVE SLOPES. USED WHERE AN EXCESS OF SOIL IS AVAILABLE.	X	X
	CHANNEL DIVERSION		(CD)	TYPICALLY USED AT TOP OR BASE OF SLOPES. USED WHEN EXCESS SOIL IS NOT AVAILABLE.	X	X
	COMBINATION DIVERSION		(DC)	TYPICALLY USED ANYWHERE ON A SLOPE. SOIL TAKEN OUT OF CHANNEL IS USED TO BUILD THE RIDGE.	X	X
	CURB AND GUTTER	X	(CG)	SPECIAL CASE OF DIVERSION USED IN CONJUNCTION WITH A STREET TO DIVERT WATER FROM AN AREA NEEDING PROTECTION.		X
	BENCHES		(B)	SPECIAL CASE OF DIVERSION CONSTRUCTED WHEN WORKING ON CUT SLOPES TO SHORTEN LENGTH OF SLOPE AND ADD SLOPE STABILITY.	X	X
WATERWAYS	BARE CHANNEL		(BC)	PROVIDES MEANS OF CONVEYING RUNOFF TO DESIRED LOCATION. MAY BE USED TO DRAIN DEPRESSIONAL AREAS. ONLY APPLICABLE WHEN VELOCITY OF FLOW IS VERY LOW.	X	
	VEGETATIVE CHANNEL		(VC)	PROVIDED ADDED STABILITY TO CHANNEL. USED WHEN VELOCITY OF FLOW IS NOT EXTREMELY FAST.	X	X
	LINED CHANNEL		(LC)	USED WHEN VEGETATION WILL NOT PROTECT THE CHANNEL AGAINST HIGH VELOCITIES OF FLOW OR WHERE VEGETATION CANNOT BE ESTABLISHED.	X	X
ENCLOSED DRAINAGE	STORM SEWER	X	(ST)	CAN BE USED TO CONVEY SEDIMENT LADEN WATER TO SEDIMENT BASIN OR IN CONJUNCTION WITH A WATERWAY.		X
	UNDERDRAIN		(UD)	USED TO LOWER WATER TABLE AND INTERCEPT GROUNDWATER FOR BETTER VEGETATION GROWTH AND SLOPE STABILITY. USED TO CARRY BASE FLOW IN WATERWAYS AND TO DEWATER SEDIMENT BASINS.	X	X
SPILLWAYS	STRAIGHT PIPE SPILLWAY		(SS)	USED FOR RELATIVELY SMALL VERTICAL DROPS AND SMALL FLOWS OF WATER.		X
	DROP INLET PIPE SPILLWAY		(DIS)	SAME AS PIPE SPILLWAY EXCEPT LARGER FLOWS AND LARGE VERTICAL DROPS CAN BE ACCOMMODATED.		X
	WEIR SPILLWAY		(W)	USED FOR RELATIVELY SMALL VERTICAL DROPS AND FLOWS MUCH GREATER THAN PIPE STRUCTURES.	X	X
	BOX INLET WEIR SPILLWAY		(BS)	SAME AS WEIR SPILLWAY EXCEPT LARGER FLOWS CAN BE ACCOMMODATED BECAUSE OF LOWER WEIR LENGTH.	X	X
OUTLETS	LINED APRON	X	(LA)	PROTECTS DOWNSTREAM CHANNEL FROM HIGH VELOCITY OF FLOW DISCHARGING FROM STRUCTURES.	X	X
SEDIMENT BASINS	EMBANKMENT SEDIMENT BASIN		(ES)	USED WHERE TOPOGRAPHY LENDS ITSELF TO CONSTRUCTING A DAM AND EARTH FILL IS AVAILABLE.	X	X
	EXCAVATED SEDIMENT BASIN		(XS)	USED WHERE EMBANKMENT COULD CAUSE A HAZARD DOWNSTREAM IN CASE OF FAILURE AND WHEN EXCESS EARTH FILL IS NOT AVAILABLE.	X	X
	COMBINATION SEDIMENT BASIN		(CS)	USED WHEN TOPOGRAPHY IS SUITABLE BUT ADDITIONAL CAPACITY IS NEEDED.	X	X
SEDIMENT FILTERS	BARRIER FILTER		(BF) (C)	USED FOR SINGLE LOTS OR DRAINAGE AREAS LESS THAN 1/2 ACRE TO FILTER SEDIMENT FROM RUNOFF.	X	
	VEGETATIVE FILTER		(VF)	USED ALONG DRAINAGEWAYS OR PROPERTY LINES TO FILTER SEDIMENT FROM RUNOFF. SIZE MUST BE INCREASED IN PROPORTION TO DRAINAGE AREA.	X	X
MUD AND DUST CONTROL	STABILIZED CONST. ENTRANCE	X	(SE)	PREVENT MUD FROM BEING PICKED UP AND CARRIED OFF-SITE.	X	X
	DUST AND TRAFFIC CONTROL		(DT)	PREVENTS DUST FROM LEAVING CONSTRUCTION SITE.	X	X

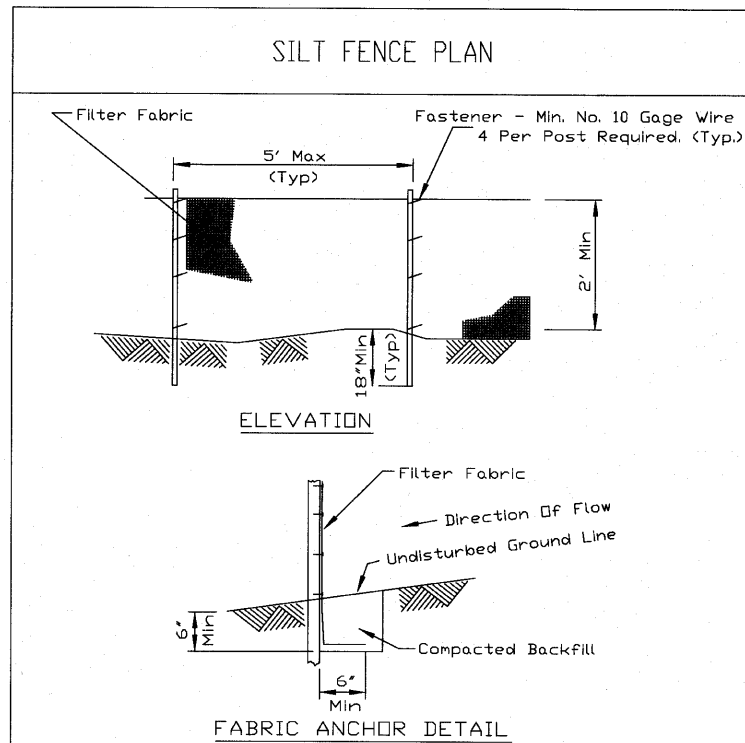


NOTES:

- Temporary sediment fence shall be installed prior to any grading work in the area to be protected. They shall be maintained throughout the construction period and removed in conjunction with the final grading and site stabilization.
- Filter fabric shall meet the requirements of material specification 592 Geotextile Table 1 or 2, Class I with equivalent opening size of at least 30 for nonwoven and 50 for woven.
- Fence posts shall be either standard steel post or wood post with a minimum cross-sectional area of 3.0 sq. in.

REFERENCE Project _____	DESIGNED _____	CHECKED _____	APPROVED _____
Date _____	Date _____	Date _____	Date _____

NRCS
Natural Resources Conservation Service

STANDARD DWG. NO. IL-620
SHEET 1 OF 2
DATE 11-20-01

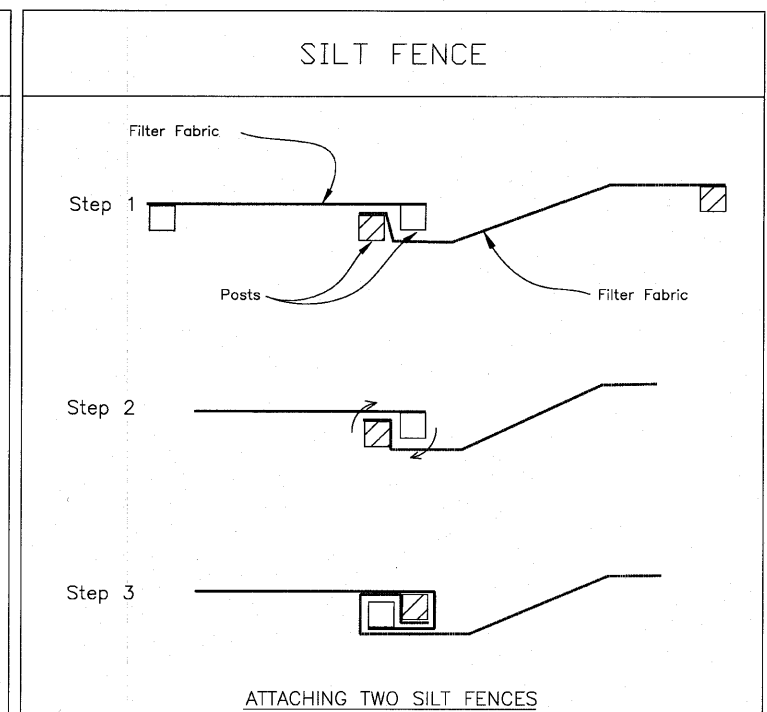

NOTES:

- Place the end post of the second fence inside the end post of the first fence.
- Rotate both posts at least 180 degrees in a clockwise direction to create a tight seal with the fabric material.
- Drive both posts a minimum of 18 inches into the ground and bury the flap.

REFERENCE Project _____	DESIGNED _____	CHECKED _____	APPROVED _____
Date _____	Date _____	Date _____	Date _____

NRCS
Natural Resources Conservation Service

STANDARD DWG. NO. IL-620(W)
SHEET 2 OF 2
DATE 11-29-99

* A DOUBLE ROW OF SILT FENCE SHALL BE INSTALLED AROUND THE PERIMETER OF THE CONSTRUCTION SITE.

SOIL PROTECTION CHART												
STABILIZATION CHART												
	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	OCT	NOV	DEC
PERMANENT SEEDINGS			A			*	*		*			
DORMANT SEEDINGS	B									B		
TEMPORARY SEEDINGS			C			D						
SODDING			E**									
MULCHING	F											

A - REFER TO LANDSCAPE PLANS FOR PERMANENT SEED MIXTURES AND LOCATIONS
 B - KENTUCKY BLUEGRASS 135 LBS./AC. MIXED WITH PERENNIAL RYEGRASS 45 LBS./AC. AND 2 TONS STRAW MULCH PER ACRE
 C - SPRING OATS 100 LBS./AC.
 D - WHEAT OR CEREAL RYE 150 LBS./AC.
 E - SOD (NURSERY GROWN KENTUCKY BLUEGRASS)
 F - EROSION CONTROL BLANKET (SPECIAL 1)

* IRRIGATE AS NECESSARY
 ** IRRIGATION AS NECESSARY TO ESTABLISH SOD