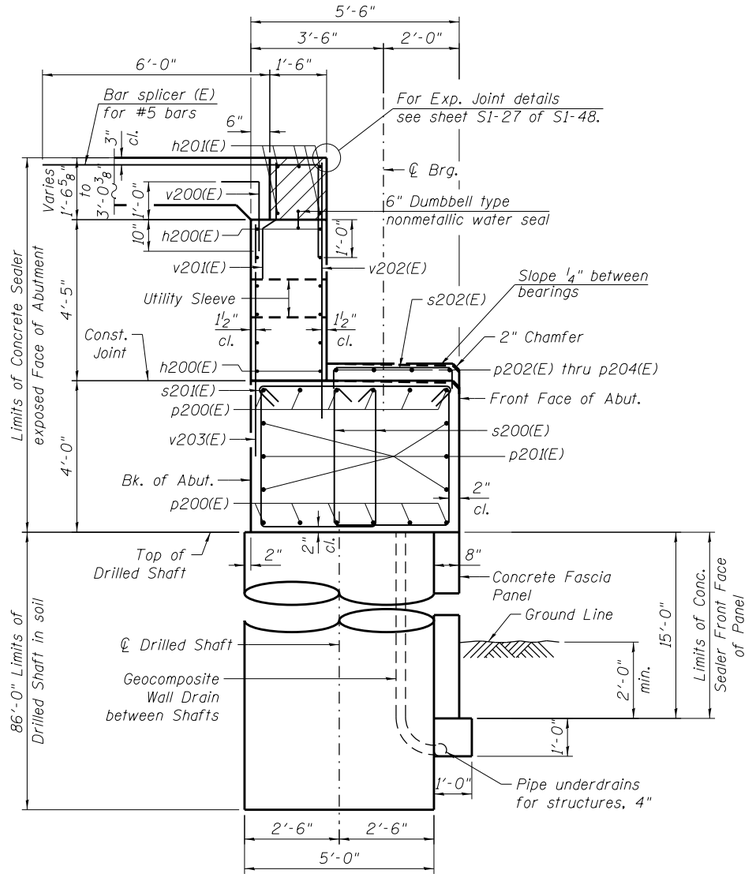

SECTION A-A

(Dimensions @ Rt. L)

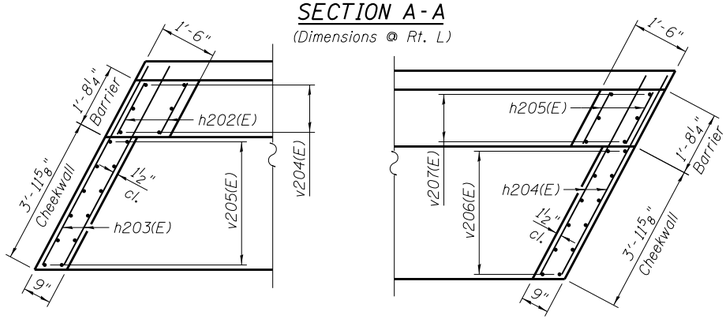

DETAIL 1

DETAIL 2

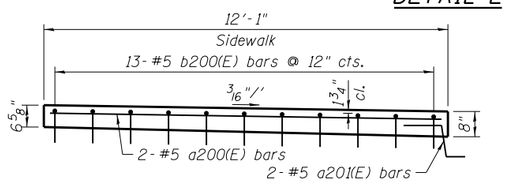

DETAIL 3

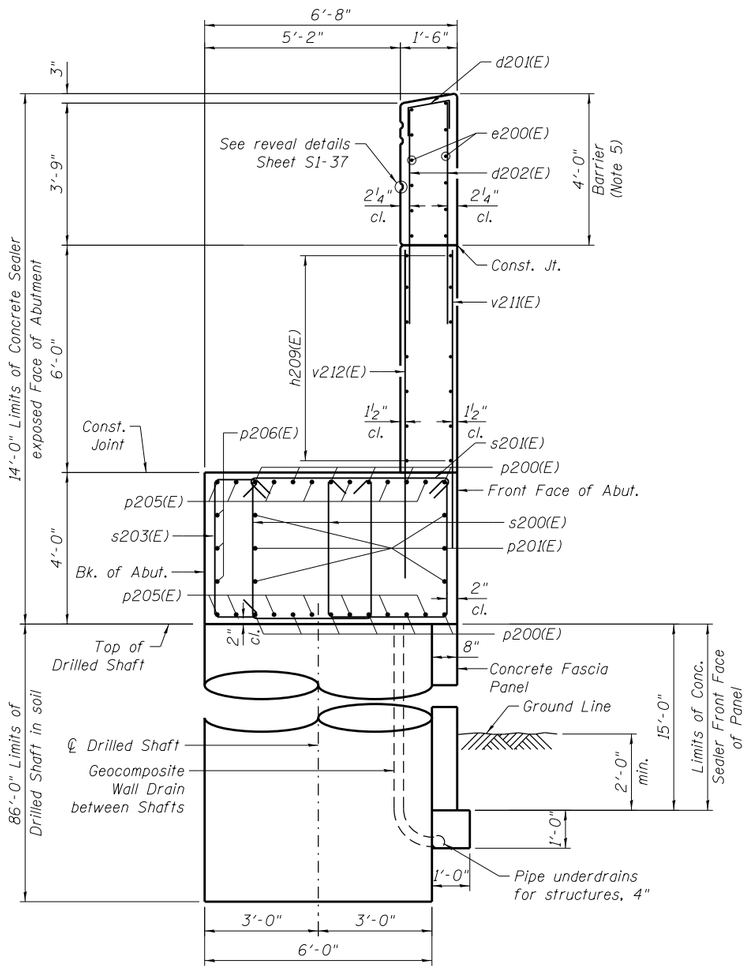

SECTION F-F

(Dimensions @ Rt. L)

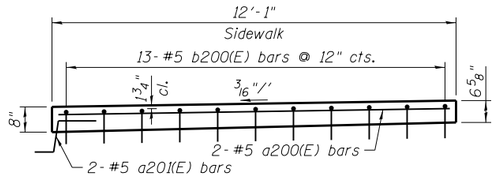

DETAIL 5

NOTES:

1. Hatched area to be poured after superstructure false work has been removed. Quantity of concrete included with Concrete Superstructure.

2. Concrete Sealer shall be applied to abutment backwall, bearing seats and exposed faces of abutment cap, cheekwalls and fascia panel.

3. E.F. = Each Face

4. Bars noted thus. 3x2- #5 indicates 3 lines of bars with 2 lengths of bars per line.

5. Barrier concrete included with pay item Concrete Superstructure.

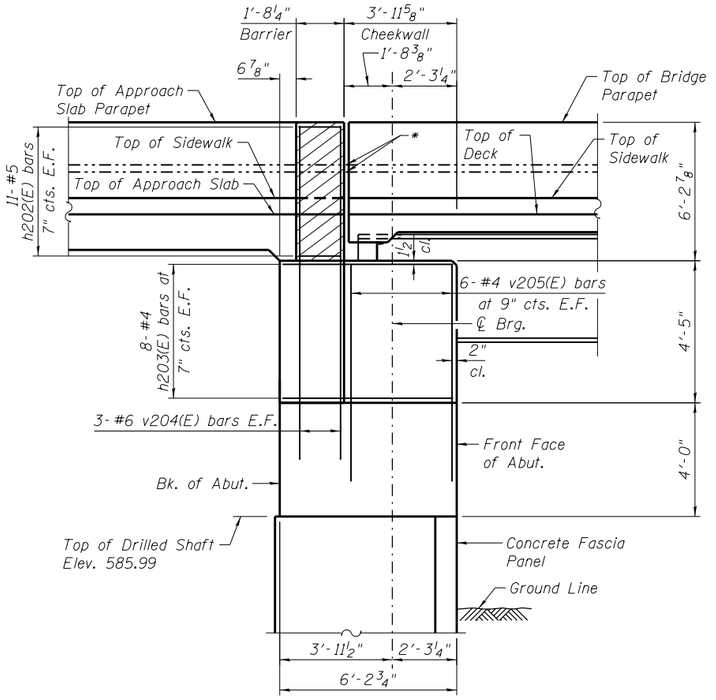

SECTION B-B

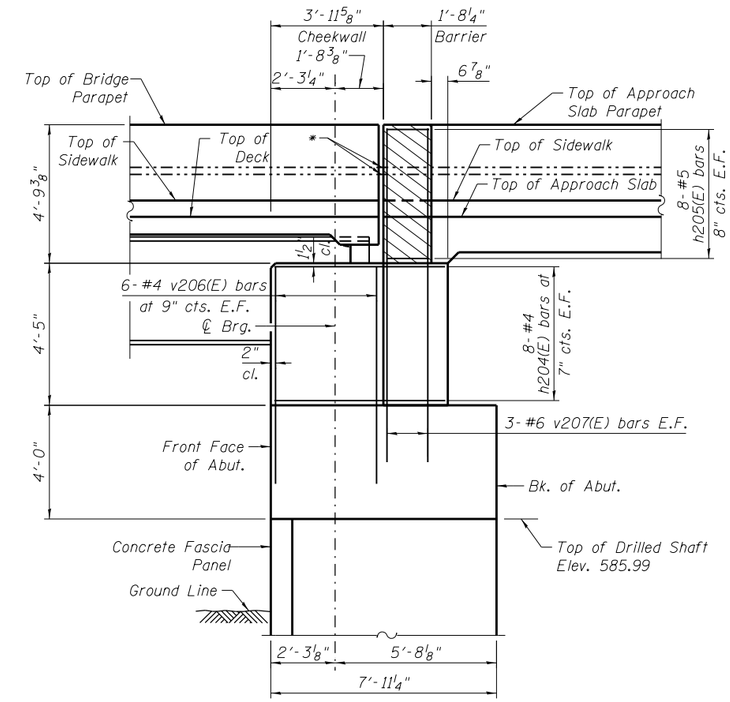

SECTION C-C

*Provide conduit expansion/deflection fitting at all expansion joints.

0161713-60W26-S35-Abutment

AECOM	USER NAME = dunkerleyb	DESIGNED - EJO	REVISED
		CHECKED - ATB	REVISED
	PLOT SCALE = N.T.S.	DRAWN - BRD	REVISED
	PLOT DATE = 9/15/2013	CHECKED - EJO	REVISED

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

WEST ABUTMENT SECTION
STRUCTURE NO. 016-1713
SHEET NO. S1-35 OF S1-48 SHEETS

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
90/94/290	2013-008R	COOK	559	285
		CONTRACT NO. 60W26		
	ILLINOIS FED. AID PROJECT			