



## METAL SHELL PILE TABLE

Designation and outside diameter	Wall thickness t	Weight per foot (Lbs./ft.)	Inside volume (yd.³/ft.)
PP12	0.179''	22.60	0.0274
PP12	0.250′′	31.37	0.0267
PP14	0.250′′	36.71	0.0368
PP14	0.312"	45.61	0.0361

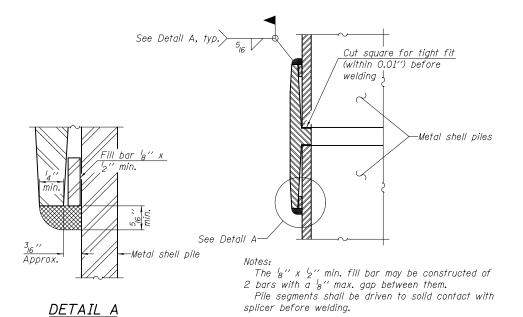

# Bottom of pile cap **ELEVATION**

6" Horizontal bend, typ.—

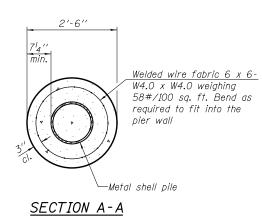

Note:

CONCRETE ENCASEMENT AT PIERS

Forms for encasement may be omitted when soil conditions permit.


# Metal shell pile 3<sub>4</sub>′′ End plate field weld


s = t - 16"

# END PLATE ATTACHMENT

METAL SHELL PILE SHOE ATTACHMENT

(See Note A)

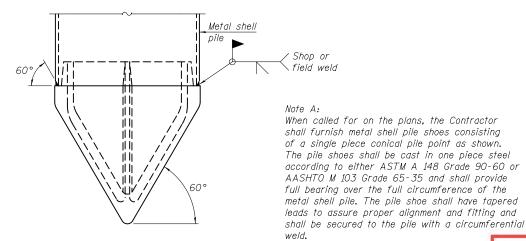

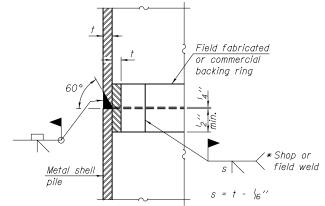

WELDED COMMERCIAL SPLICE

# vertically rejoin with partial joint penetration weld.

The metal shell piles shall be according to ASTM A 252 Grade 3.

F-MS DESIGNED - Nick R. Barnett EXAMINED DATE SECTION COUNTY **METAL SHELL PILE DETAILS** STATE OF ILLINOIS CHECKED - Al-Barrae R. Shebib 301 3BR & 3BR-1 WINNEBAGO STRUCTURE NO. 101-0195 (E.B.) & 101-0196 (W.B.) h.t. duong PASSED REVISED **DEPARTMENT OF TRANSPORTATION** CONTRACT NO. 64D19 SHEET NO. 48 OF 55 SHEETS CHECKED - NRB/GRA

# Bottom of abutment

SECTION B-B

**ELEVATION** 

METAL SHELL REINFORCEMENT AT ABUTMENTS

В