


F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
774	107 WRS-2, L	EFFINGHAM	127	14
FED. ROAD DIST. NO.	ILLINOIS	FED. AID PROJECT		

CONTRACT NO. 74130

DITCH SCHEDULE						
STATION TO STATION	OFFSET	LENGTH	WIDTH	EROSION CONTROL BLANKET	STONE RIPRAP CLASS A4	FILTER FABRIC
				SQ YD	SQ YD	SQ YD
545+37.00 - 545+48.00	RT	11	10	12	-	-
545+48.00 - 546+00.00	RT	52	9	-	52	52
900+00.00 - 900+50.00	RT	50	9	-	50	50
900+50.00 - 902+00.00	RT	150	9	150	-	-
899+00.00 - 900+98.00	LT	198	9	-	198	198
901+10.00 - 903+00.00	LT	190	9	-	190	190
TOTALS				162	490	490

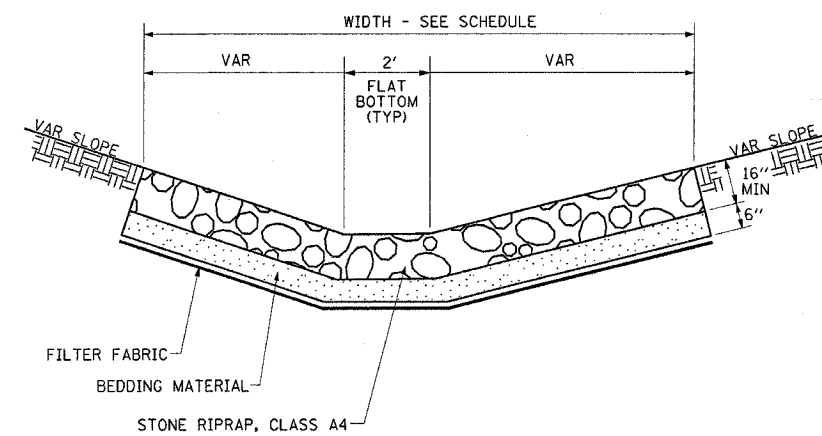

DETAIL OF STONE RIPRAP, CLASS A4

REVISIONS	
NAME	DATE

ILLINOIS DEPARTMENT OF TRANSPORTATION

DITCH RIPRAP SCHEDULE AND DETAILS

DATE 8/02

DRAWN BY MLO
CHECKED BY TGC