


**DECK CROSS SECTION**


\* Vertical dimensions marked with an asterisk "\*" will vary. The dimensions provided are the maximum dimensions located at the abutments. Due to the camber of beams, these dimensions will be reduced by approximately 1/4" at midspan. Adjust reinforcement bars in field accordingly.

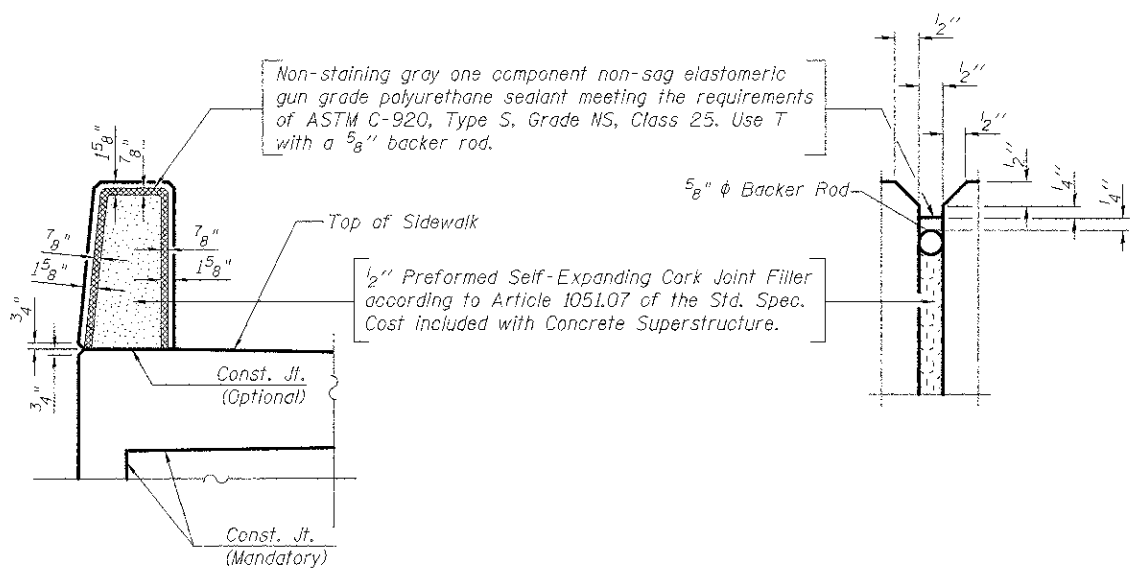

**PARAPET JOINT DETAILS**

**PARAPET & MEDIAN BILL OF MATERIAL**

Bar	No.	Size	Length	Shape
b(E)	32	#4	21'-6"	—
c(E)	42	#5	5'-7"	—
d2(E)	10	#4	2'-0"	⏏
e(E)	12	#4	21'-6"	—
Concrete Superstructure			Cu. Yd.	19.3
Protective Coat			Sq. Yd.	82
Reinforcement Bars, Epoxy Coated			Pound	890



Note:  
Apply protective coat to the top and inside vertical faces of the sidewalk, parapet, and median.

