

SOLAR POWER FLASHING BEACON AND SIGN DETAILS



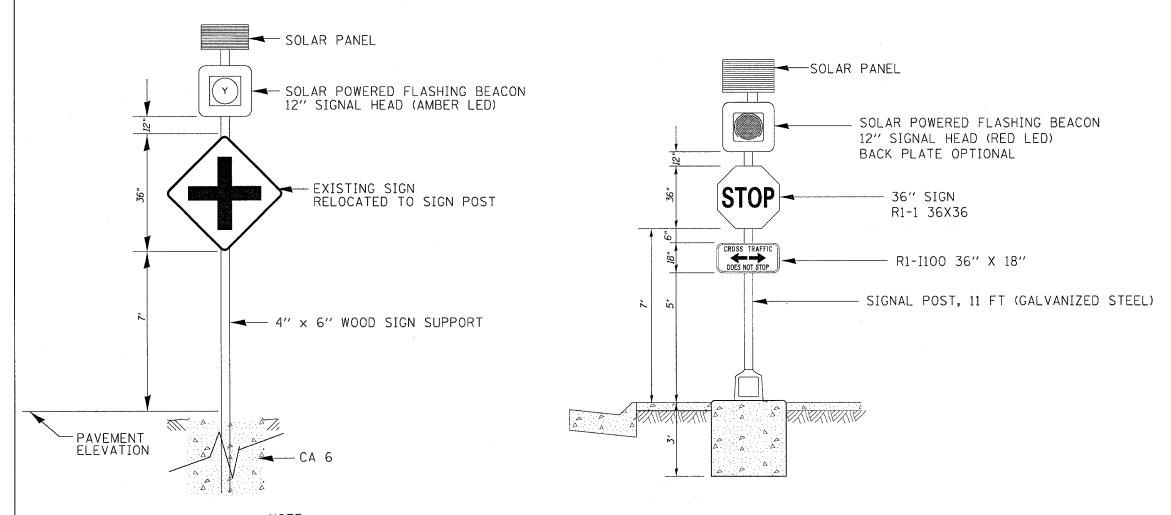

3 Pieces of Sign Fix Brand like material

CROSS TRAFFIC

0.8" Border, White on Red; Type A (High Intensity) Sheeting

R1-1 STD.:

DOES NOT STOP

4.7 * 10.3 * 3 * 13.3 * 4.7

8.1 * 9.4 * 8.1 * 6.4 * 7.4 * 6.4 * 1.5

1.5

1.5

3.8" Radius, 0.9" Border, 0.6" Indent, Black on White; [CROSS TRAFFIC] C;

Standard Arrow Custom 9.4" X 5.4" 180°; Standard Arrow Custom 9.4" X 5.4" 0°; [DOES NOT STOP] C 50% spacing; Type B (Engineering Grade) Sheeting 2 Pieces of Sign Fix Brand like material

NOTE:

THE CONTRACTOR SHALL SUPPLY ALL NECESSARY HARDWARE TO MOUNT THE SIGNS TO THE POST. THIS MOUNTING HARDWARE SHALL BE SIMILAR TO THE SIGN FIX BRAND MATERIAL.

NO FLASHING BEACON SIGNAL WORK SHALL BE ALLOWED TO BEGIN UNTIL ALL COMPONENTS TO COMPLETE THE WORK ARE ON THE JOB SITE.

ANY SIGN WHICH REQUIRES REMOVAL OR REMOVAL AND RE-ERECT WHICH IS NOT LISTED IN THESE PLANS SHALL BE COVERED UNDER ART 107.25 OF THE CURRENT "STANDARD SPECIFICATIONS FOR ROAD AND BRIDGE CONSTRUCTION" MANUAL.

CONTACT KURT GLAZIER AT THE ILLINOIS DEPARTMENT OF TRANSPORTATION 2 WEEKS PRIOR TO THE PLACEMENT OF SIGNS FOR STAKING AND APPROVAL

RELOCATE EXISTING "INTERSECTION AHEAD" SIGNS TO PROPOSED WOOD POST WITH SOLAR POWERED FLASHING BEACON.