
| CONTRACT NO. 88799 | F.A.P. | SECTION | COUNTY | TOTAL SHEET | SHEETS | NO. | 315 | (1088)8R, BR-1 | MeDonough | 80 | 74

315 (1088)8R, BR-1 | McDanough | 80 STA, 63+00 TO STA,74+00

FED. ROAD DIST. NO. 7 BLUINDIS FED. AID PROJECT

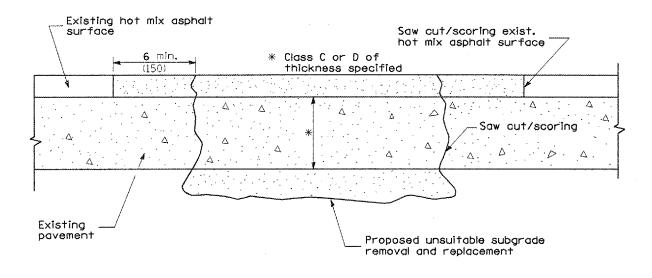

SEQUENCE OF CONSTRUCTION

- 1. Remove the existing hot mix asphalt surface.
- 2. Remove and replace full depth patches.
- 3. Replace hot mix asphalt surface.

PAVEMENT PATCHING FOR HOT MIX ASPHALT SURFACED PAVEMENT

GENERAL NOTES

 The width of the full depth patch over a trench shall be 12 (300) wider on each side of the trench.

All dimensions are in inches (millimeters) unless otherwise noted.

(millimeters) unless otherwise noted

ILLINOIS DEPARTMENT OF TRANSPORTATION DISTRICT CADD STANDARD REVISIONS BY

| DATE | REVISIONS | BY | 1-1-97 | RENUM. C-104.03, NEW REVISION BOX, | T.P. | REVISEO NOTES | 9-15-05 | REVISED DESIGNER NOTE | M.M.A. | 10-16-06 | REVISED TO 2007 SPEC. | M.A. |

HOT MIX ASPHALT SURFACE REMOVAL OVER PATCHES

CADD STD NO. 440101-D4

SCALE: NOT DRAWN TO SCALE DRAWN BY CAOD DATE CHECKED BY