


F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
80/94	2626.2-R-2	COOK/LAKE	1207	434
STA.	TO STA.			
FED. ROAD DIST. NO.	ILLINOIS	FED. AID PROJECT		
CONTRACT NO. 62114	INDOT DES. NO. 0100987			



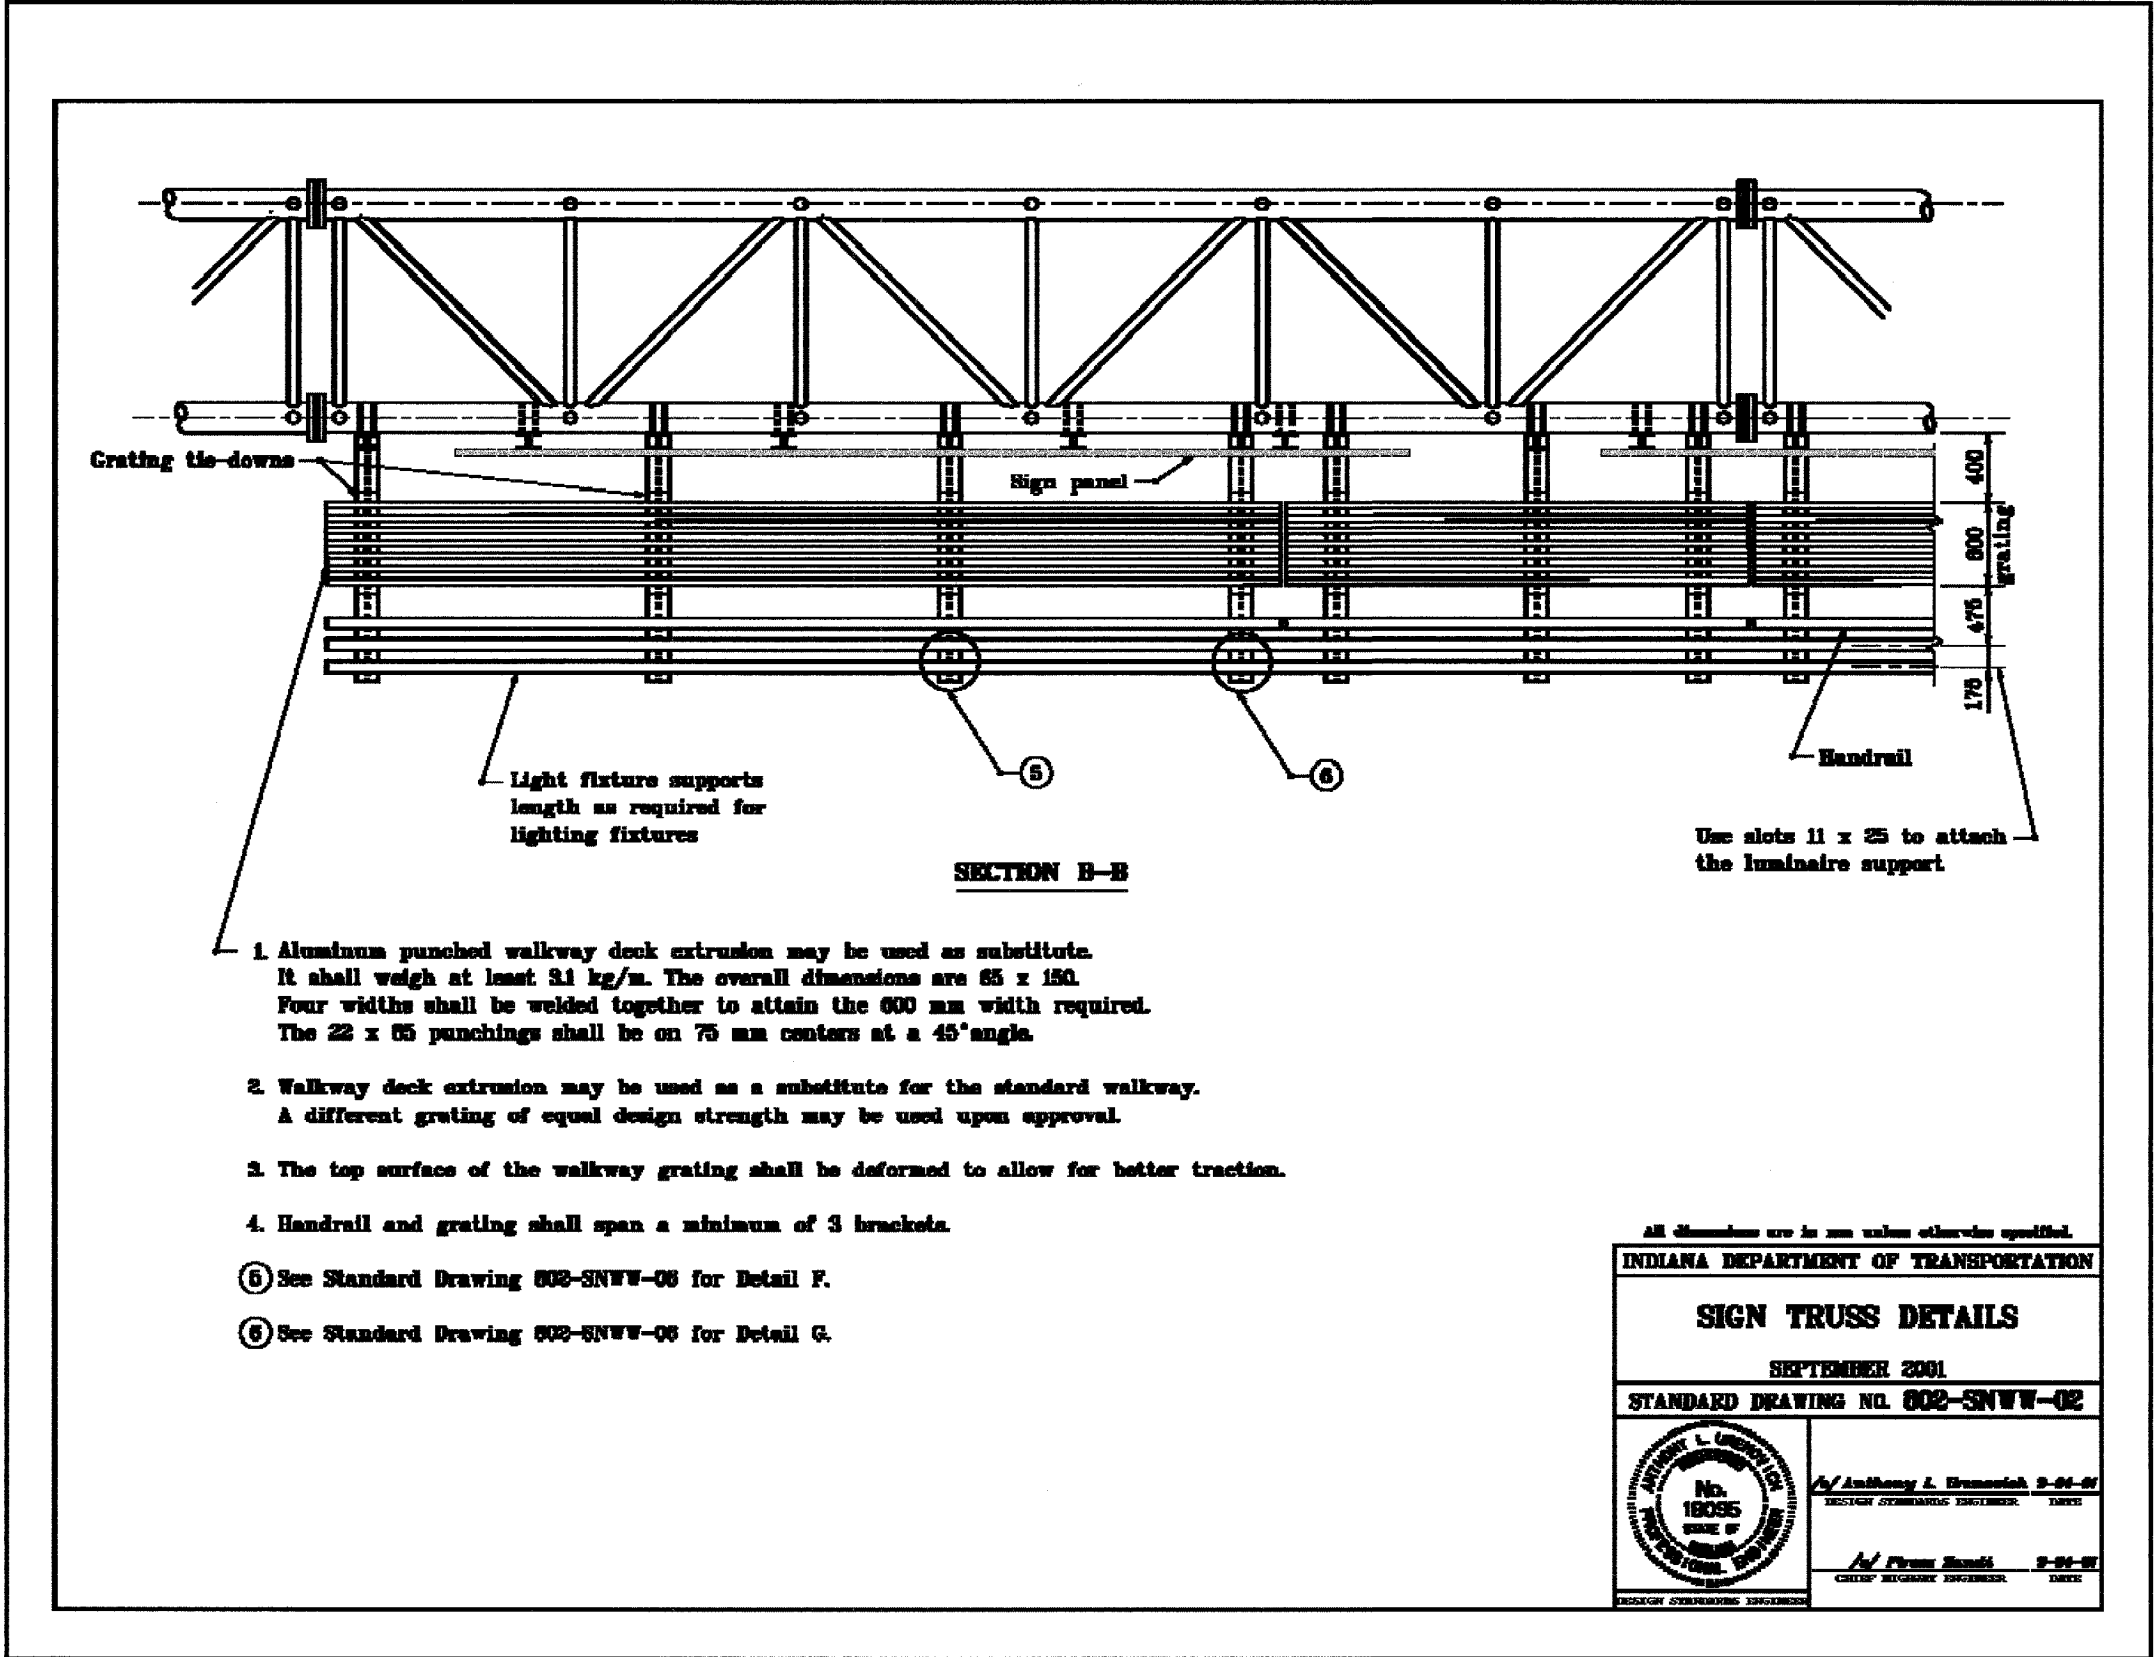

SECTION B-B

1. Aluminum punched walkway deck extrusion may be used as substitute. It shall weigh at least 3.1 kg/m. The overall dimensions are 85 x 150. Four widths shall be welded together to attain the 600 mm width required. The 22 x 65 punchings shall be on 75 mm centers at a 45° angle.
2. Walkway deck extrusion may be used as a substitute for the standard walkway. A different grating of equal design strength may be used upon approval.
3. The top surface of the walkway grating shall be deformed to allow for better traction.
4. Handrail and grating shall span a minimum of 3 brackets.

- ⑤ See Standard Drawing 802-SNWW-06 for Detail F.
- ⑥ See Standard Drawing 802-SNWW-06 for Detail G.

All dimensions are in mm unless otherwise specified.

INDIANA DEPARTMENT OF TRANSPORTATION	
SIGN TRUSS DETAILS	
SEPTEMBER 2001	
STANDARD DRAWING NO. 802-SNWW-02	
	<i>/s/ Anthony L. Brunstich</i> 9-01-01 <small>DESIGN ENGINEER</small>
	<i>/s/ Frank Smith</i> 9-01-01 <small>DESIGN ENGINEER</small>