


|                 |            |                      |           |             |           |
|-----------------|------------|----------------------|-----------|-------------|-----------|
| ROUTE NO.       | SECTION    | COUNTY               | SHEET NO. | SHEET TOTAL | SHEET NO. |
| F.A.S.<br>06/14 | 2626.2-R-1 | LAKE COUNTY, INDIANA | 1207      | 891         | 17 SHEETS |
| ILLINOIS        |            | FED. AID PROJECT     |           |             |           |

CONTRACT NO. 62114 INDOT DES. NO. 0100987

Notes: Driving and bearing ends of pipe shall be cut square. The thickness of the shell shall be 6.35 mm with a tolerance of 5%. The shell shall be according to Article 1006.05(a) of the Standard Specifications.

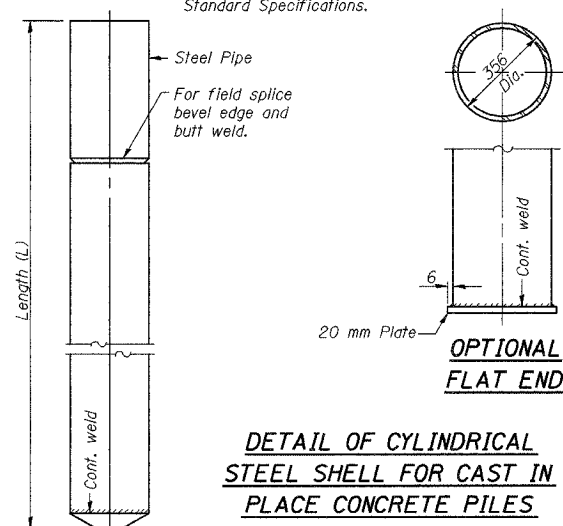

**DETAIL OF CYLINDRICAL STEEL SHELL FOR CAST IN PLACE CONCRETE PILES**

|          |     |
|----------|-----|
| DESIGNED | MJW |
| CHECKED  | KFA |
| DRAWN    | MJB |
| CHECKED  | GSP |

X-PB (M) 4-30-97 (All dimensions are in millimeters (mm) except as noted.)

ILLINOIS DEPARTMENT OF TRANSPORTATION  
 I-80/94/US 6  
 KINGERY-BORMAN EXPRESSWAY  
 BURNHAM ROAD TO US 41

**CONCRETE PILE DETAILS**  
 SECTION 2626.2-R-1  
 LAKE COUNTY, INDIANA  
 STATION 8+600.619 TO STATION 8+735.576  
 STRUCTURE NO. 016-W859

DATE 07/05

**AMERICAN**  
 CONSULTING ENGINEERS