
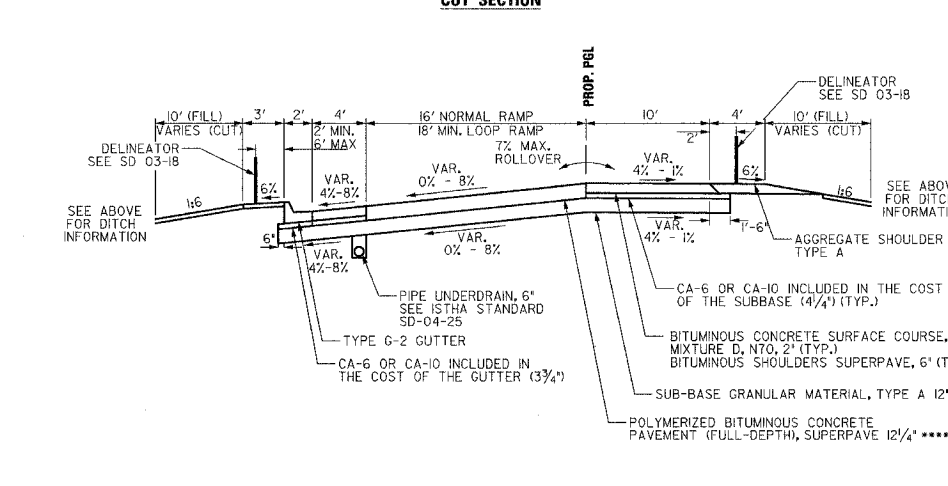
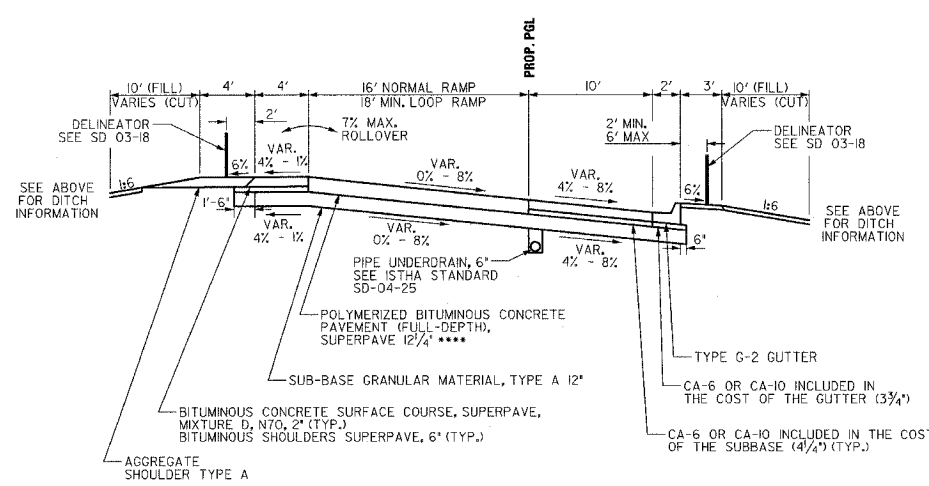
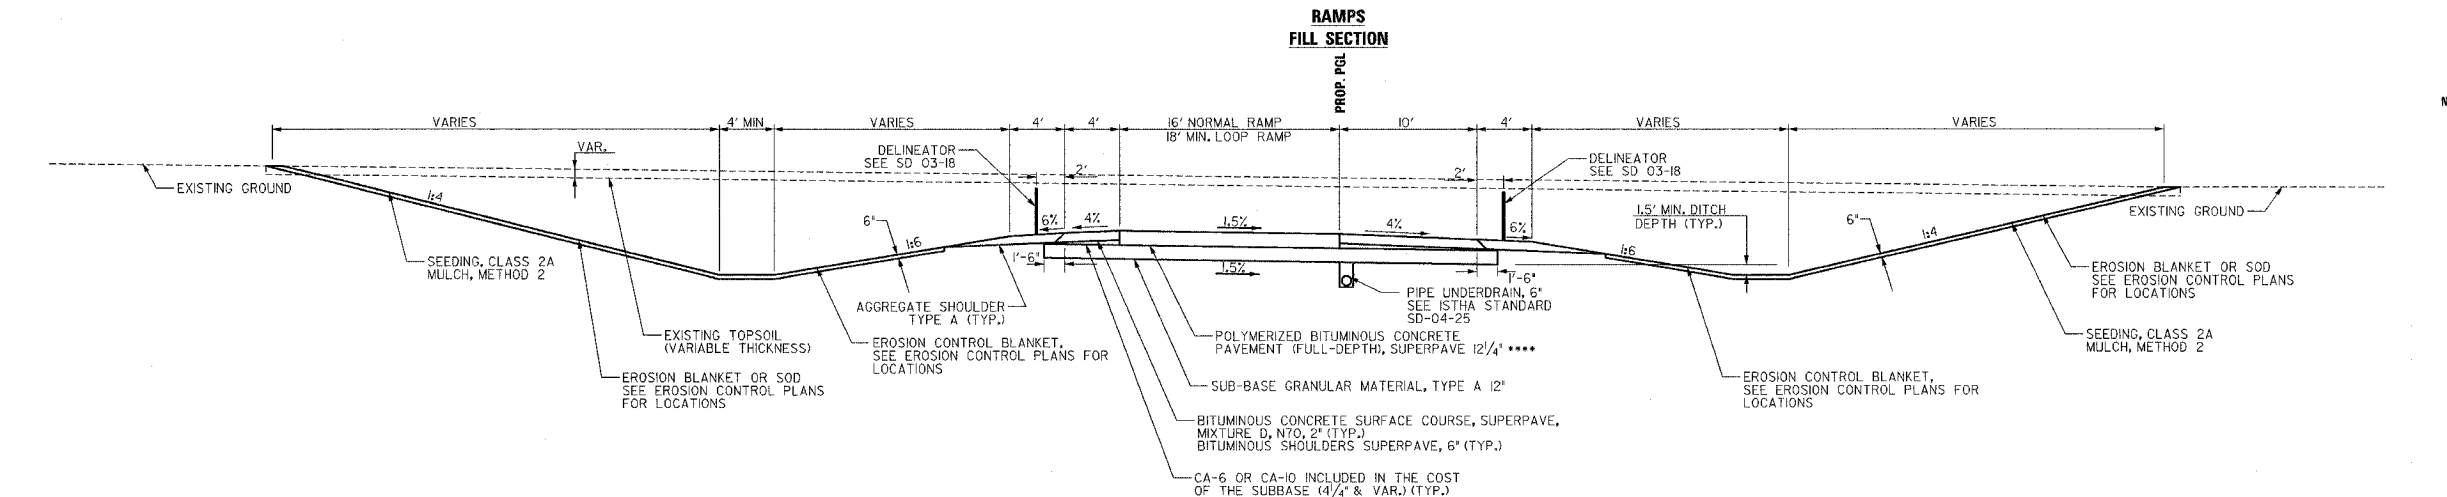


# TYPICAL SECTIONS - RAMPS

F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
303	I29K	WINNEBAGO	585	13
STA. 1315+00 TO 1320+00		TO STA.		
FED. ROAD DIST. NO.	ILLINOIS	FED. AID PROJECT		

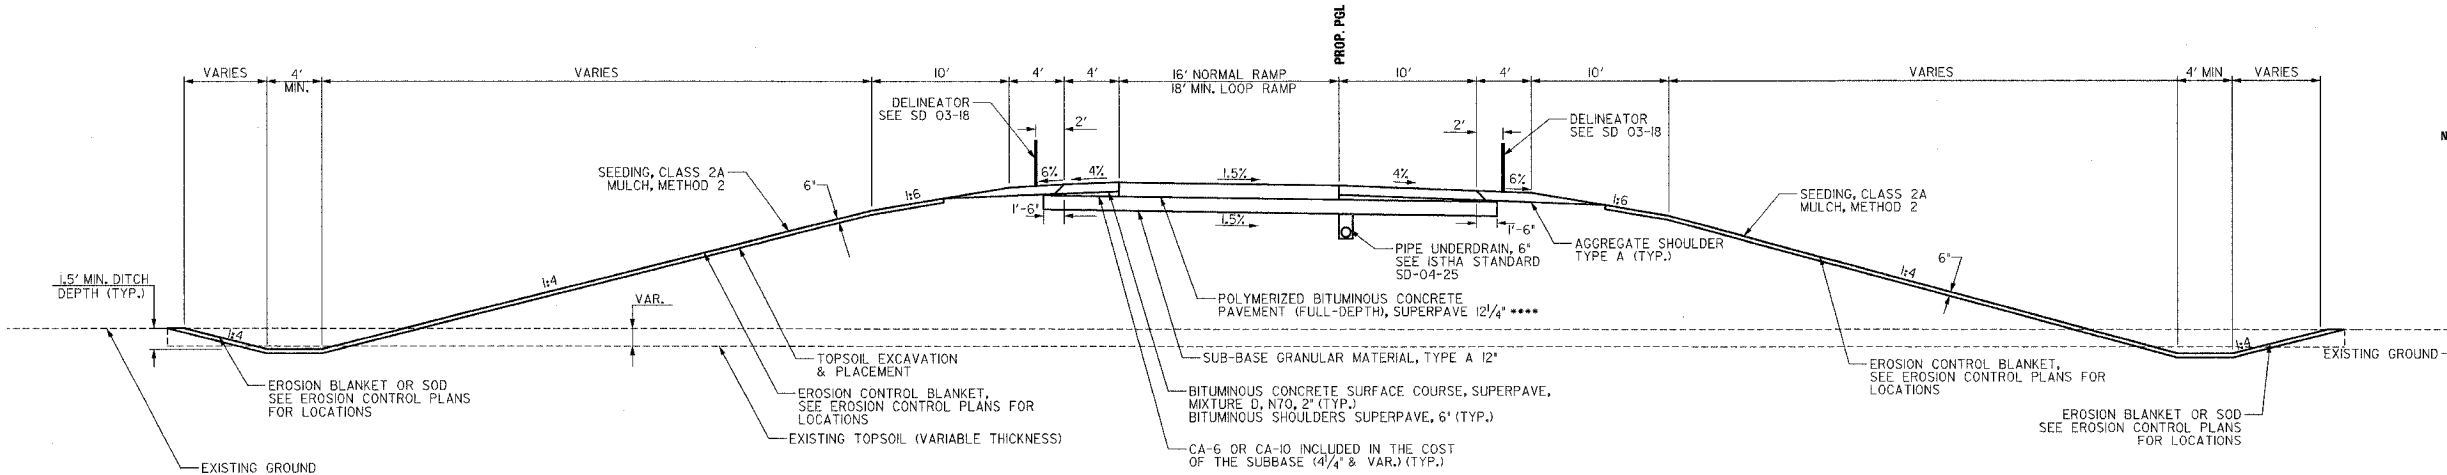

**NOTE:**  
SEE MIX DESIGN TABLE IN THE GENERAL NOTES FOR ADDITIONAL INFORMATION RELATED TO THE BITUMINOUS CONCRETE MATERIALS USED IN PAVING OPERATIONS.

- WEIGHT OF BITUMINOUS MATERIAL = 119 LBS/IN<sup>3</sup> FOR MIX 'F'
- RAMPA PAVEMENT CONSISTS OF:
  - 2" POLYMERIZED BITUMINOUS CONCRETE SURFACE COURSE, SUPERPAVE, MIX F, N105 (TOP LIFT)
  - 6-1/4" POLYMERIZED BITUMINOUS CONCRETE BINDER COURSE, SUPERPAVE, IL 12.5, N105 (INTERMEDIATE BINDER LIFT)
  - 4" POLYMERIZED BITUMINOUS CONCRETE BINDER COURSE, SUPERPAVE, IL 19.0, N90 (BOTTOM BINDER LIFT)
- I-90 & AUX. LANE PAVEMENT CONSISTS OF:
  - 2" POLYMERIZED BITUMINOUS CONCRETE SURFACE COURSE, SUPERPAVE, MIX D, N105 (TOP LIFT)
  - 6-1/4" POLYMERIZED BITUMINOUS CONCRETE BINDER COURSE, SUPERPAVE, IL 12.5, N105 (INTERMEDIATE BINDER LIFT)
  - 4" POLYMERIZED BITUMINOUS CONCRETE BINDER COURSE, SUPERPAVE, IL 19.0, N90 (BOTTOM BINDER LIFT)

**RAMPS SUPERELEVATION RIGHT**  
RAMP A - STA. 897+63 TO 817+89  
RAMP B - STA. 5010+33 TO 5022+59  
RAMP C - STA. 4011+81 TO 4019+75  
RAMP D - STA. 1306+02 TO 1310+57

**RAMPS SUPERELEVATION LEFT**  
RAMP A - STA. 817+89 TO 824+19  
RAMP C - STA. 4002+02 TO 4011+81

REVISIONS	
NAME	DATE

ILLINOIS DEPARTMENT OF TRANSPORTATION  
**TYPICAL SECTIONS - RAMPS**  
SCALE: VERT. N/A  
HORIZ. N/A  
DATE: SEPTEMBER 14, 2005  
DRAWN BY: BSL  
CHECKED BY: PDS