
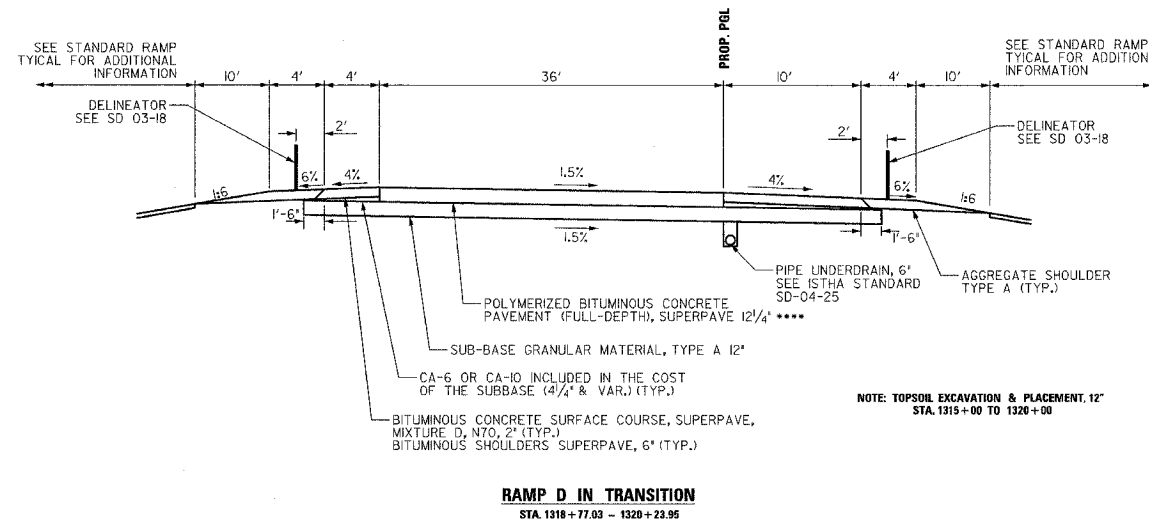
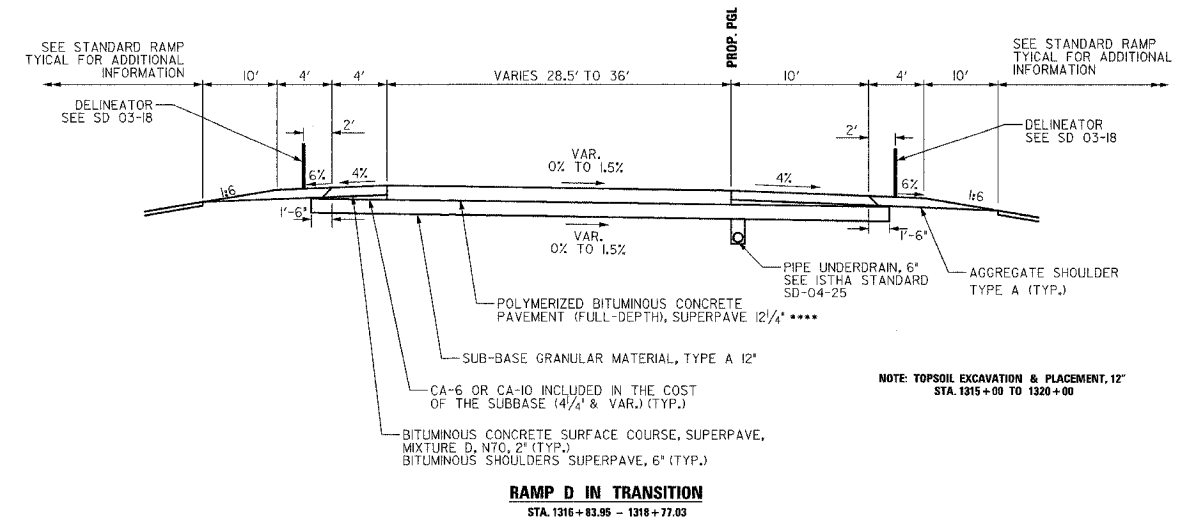


TYPICAL SECTIONS – RAMP TRANSITIONS

| F.A.P. RTE. | SECTION | COUNTY | TOTAL SHEETS | SHEET NO. |
|---------------------|----------|------------------|--------------|-----------|
| 303 | I29K | WINNEBAGO | 585 | 15 |
| STA. | | TO STA. | | |
| FED. ROAD DIST. NO. | ILLINOIS | FED. AID PROJECT | | |

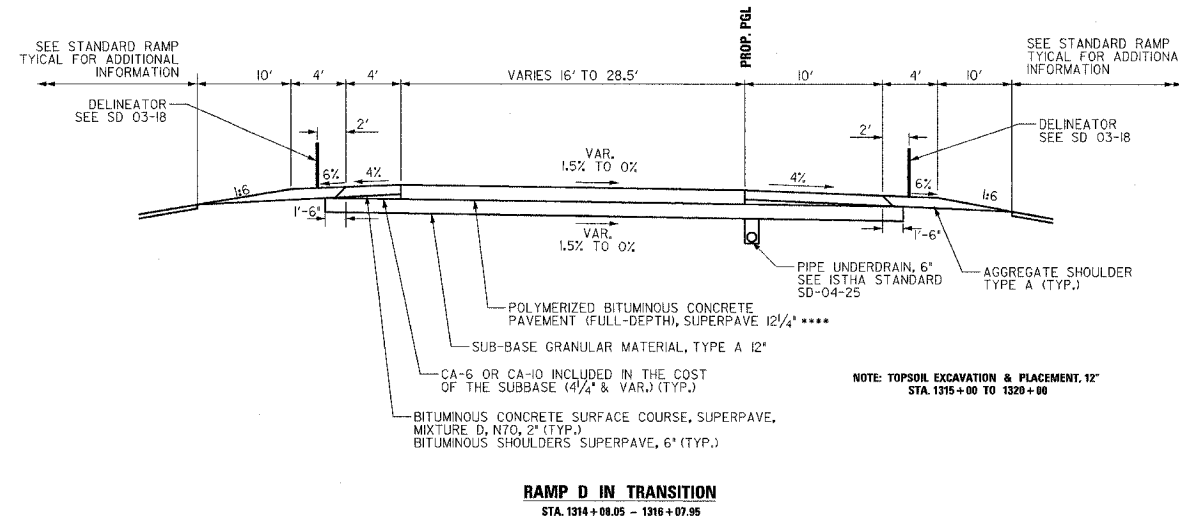

NOTE:
SEE MIX DESIGN TABLE IN THE GENERAL NOTES FOR ADDITIONAL INFORMATION RELATED TO THE BITUMINOUS CONCRETE MATERIALS USED IN PAVING OPERATIONS.

- * WEIGHT OF BITUMINOUS MATERIAL = 119 LBS/IN²SY FOR MIX "F"
- **** RAMP PAVEMENT CONSISTS OF:
 - 2" POLYMERIZED BITUMINOUS CONCRETE SURFACE COURSE, SUPERPAVE, MIX F, N105 (TOP LIFT)
 - 6-1/4" POLYMERIZED BITUMINOUS CONCRETE BINDER COURSE, SUPERPAVE, IL 12.5, N105 (INTERMEDIATE BINDER LIFT)
 - 4" POLYMERIZED BITUMINOUS CONCRETE BINDER COURSE, SUPERPAVE, IL 19.0, N90 (BOTTOM BINDER LIFT)
- **** I-90 & AUX. LANE PAVEMENT CONSISTS OF:
 - 2" POLYMERIZED BITUMINOUS CONCRETE SURFACE COURSE, SUPERPAVE, MIX D, N105 (TOP LIFT)
 - 6-1/4" POLYMERIZED BITUMINOUS CONCRETE BINDER COURSE, SUPERPAVE, IL 12.5, N105 (INTERMEDIATE BINDER LIFT)
 - 4" POLYMERIZED BITUMINOUS CONCRETE BINDER COURSE, SUPERPAVE, IL 19.0, N90 (BOTTOM BINDER LIFT)

| REVISIONS | |
|-----------|------|
| NAME | DATE |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |

ILLINOIS DEPARTMENT OF TRANSPORTATION

TYPICAL SECTIONS – RAMP TRANSITIONS

SCALE: VERT. N/A
HORIZ. N/A
DATE: SEPTEMBER 14, 2005

DRAWN BY: BSL
CHECKED BY: PDS