
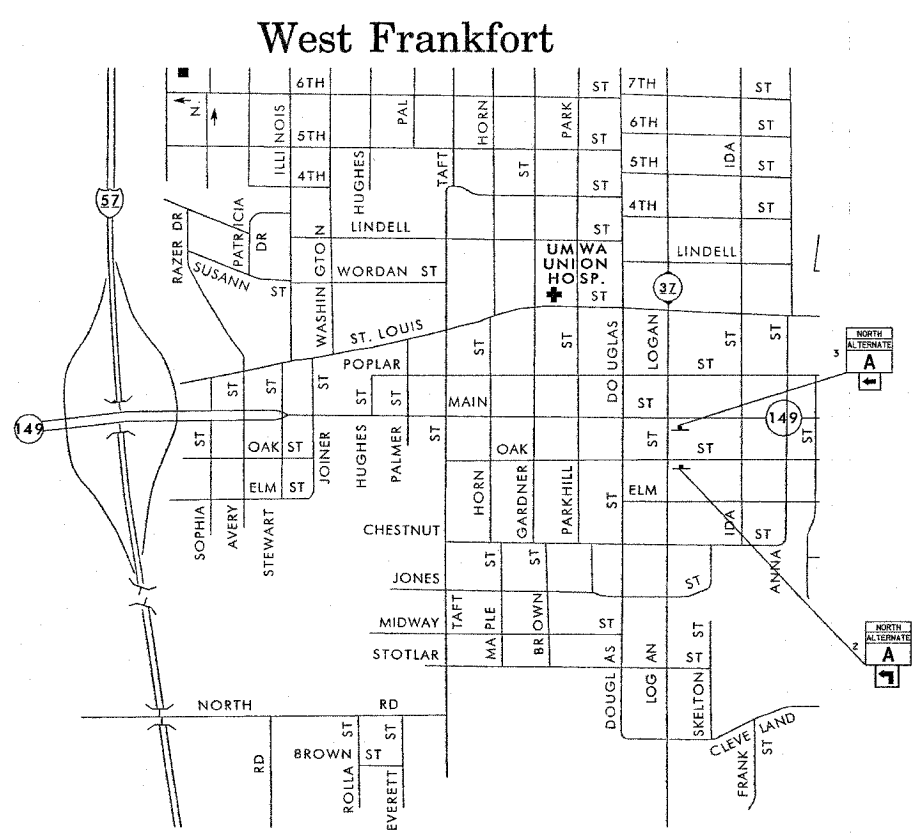
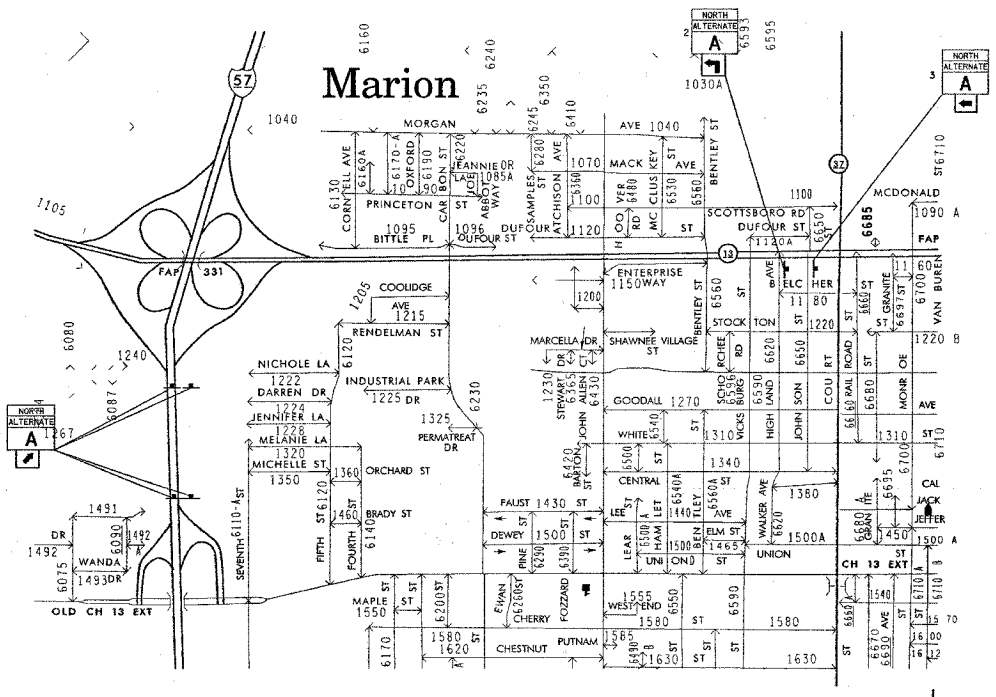


| F. A. I. RTE. | SECTION | COUNTY | TOTAL SHEETS | SHEET NO |
|---------------------|---------|------------|------------------|----------|
| 57 | * | WILLIAMSON | 60 | 60 |
| STA. | | TO STA. | | |
| FED. ROAD DIST. NO. | | ELLIPSES | FED. AID PROJECT | |



* [X1-(4,4-1,5,6,6-2)] R-1

NOTES:

1. THE CONTRACTOR HAS THE OPTION OF USING METAL POSTS INSTEAD OF WOOD.
2. ALL SIGNS SHALL BE BLACK ON ORANGE.
3. ALL SIGN HARDWARE REQUIRED TO INSTALL THE ALTERNATE ROUTE SIGNING SHALL BE INCLUDED IN COST OF SIGN PANEL TYPE 1.
4. SIGNS SHALL BE REMOVED ON COMPLETION OF THE CONTRACT AT THE DIRECTION OF THE ENGINEER. THIS WORK SHALL BE COMPLETED ACCORDING TO SECTION 724 OF THE STANDARD SPECIFICATIONS. THIS WORK WILL NOT BE PAID FOR. THE SIGNS AND POSTS SHALL BECOME THE PROPERTY OF THE CONTRACTOR.
5. ALTERNATE A = ILLINOIS ROUTE 13, 37, & 149.
6. THE RELOCATING, MAINTENANCE OR REPLACEMENT OF SIGNS SHALL BE PAID FOR IN ACCORDANCE WITH ARTICLE 109.04.
7. EXACT SIGN PLACEMENT WILL BE DETERMINED BY THE ENGINEER.
8. CONTACT DISTRICT 9 TRAFFIC OPERATIONS ENGINEER, (KEVIN GRAMMER, 618-549 2171) 10 DAYS PRIOR TO ERECTING SIGNS

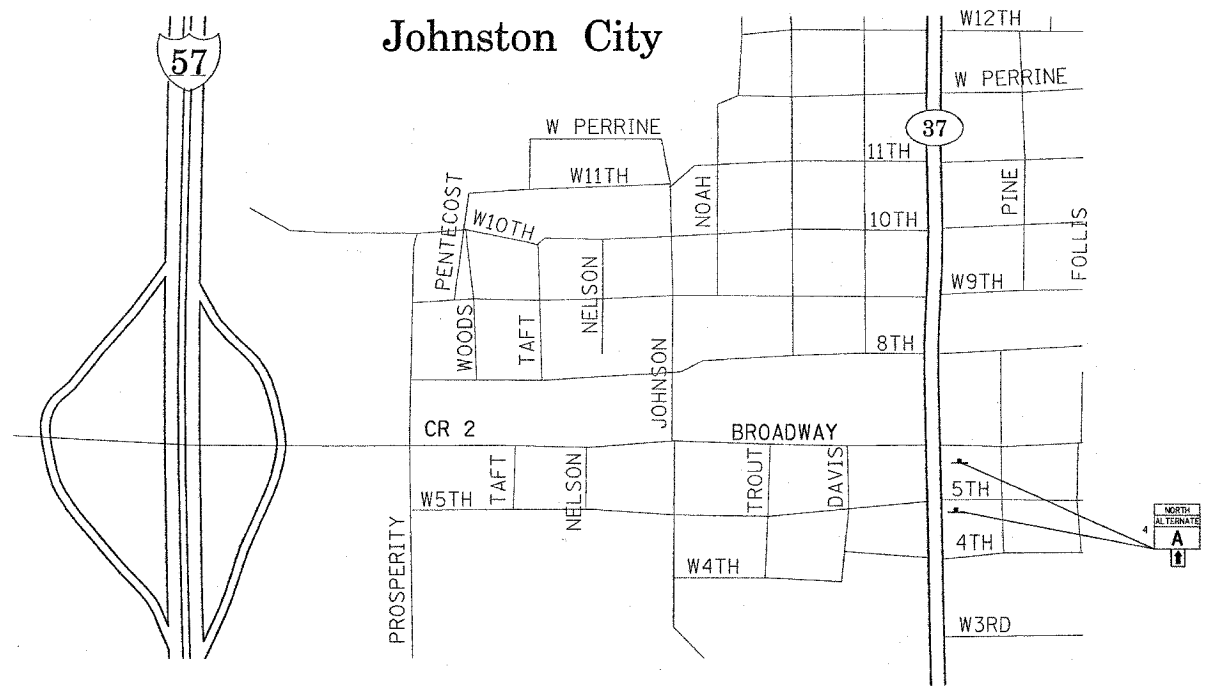

PROPOSED SIGN KEY

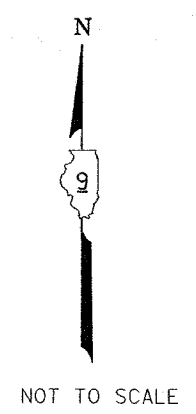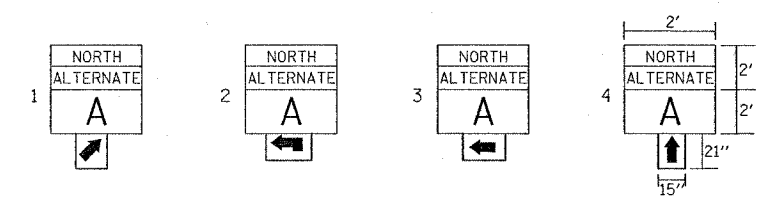

NOT TO SCALE

| SIGN PANEL, TYPE 1 | SIGN POST |
|--------------------|-----------|
| SQ FT | EACH |
| 101.8 | 10 |

DATE-TIME
 4-20-00
 4-20-00
 4-20-00
 4-20-00

ALTERNATE ROUTE SIGNING - MARION, JOHNSTON CITY, WEST FRANKFORT