

7/10/18 HAM

CODE NO.	ITEM	UNIT	TOTAL QUANTITY	CONSTRUCTION CODE		
				100 % STATE/URBAN		
				ST. CLAIR	MADISON	
				MINOR STRUCTURES	MINOR STRUCTURES	MINOR STRUCTURES
				0014	0014	0014
				082-0261	060-0211	060-0205
X7015005	CHANGEABLE MESSAGE SIGN	CAL DA	1071	504	284	283
Z0007101	CONTAINMENT AND DISPOSAL OF LEAD PAINT CLEANING RESIDUES NO. 1	LSUM	1	1		
Z0010501	CLEANING AND PAINTING STEEL BRIDGE NO. 1	LSUM	1	1		
Z0010502	CLEANING AND PAINTING STEEL BRIDGE NO. 2	LSUM	1		1	
φ Z0070604	TRAINEES TRAINING PROGRAM GRADUATE	Hour	1000	1000		
Z0010503	CLEANING AND PAINTING STEEL BRIDGE NO. 3	LSUM	1			1

S

φ 0042

△ REV 6-6-17

PAVEMENT MARKING SCHEDULE				
STATION		PAVMT MRKNG BLACKOUT TAPE 6"	PAVEMENT MARKING REMOVAL	
		FOOT	SQ FT	
STAGE 2				
314+00	TO 329+00	400	200	
SUBTOTAL		400	200	
STAGE 3				
254+00	TO 269+00	320	160	
269+00	TO 284+00	1502	751	
284+00	TO 299+00	1500	750	
299+00	TO 314+00	1913	957	
314+00	TO 329+00	1631	816	
329+00	TO 344+00	750	325	
344+00	TO 359+00	106	53	
SUBTOTAL		5235	2618	
STAGE 4				
230+00	TO 239+00	450	225	
239+00	TO 254+00	1718	859	
254+00	TO 269+00	2109	1055	
269+00	TO 284+00	990	495	
284+00	TO 299+00	942	471	
299+00	TO 314+00	662	331	
SUBTOTAL		6871	6870	
TOTAL		12506	6253	


CHANGEABLE MESSAGE SIGNS (CMS) SCHEDULE		
LOCATION	LOCATION COMMENTS	CAL DAYS
LOCATION 1 (SN 082-0261)		
I-64	I-64/55 EB- 500' WEST OF I-64 & I-55 SPLIT (EXIT 3)	56
I-64	I-64 EB- 500' WEST OF ENTRANCE TO I-64 EB C/D LANES TO I-255	56
I-64	I-64 WB- 500' EAST OF ENTRANCE TO I-64 WB C/D LANES TO I-255	56
I-64	I-64 WB- 500' EAST OF O'FALLON EXIT (EXIT 14)	56
I-70	I-70 EB- 500' NORTH OF RAMP TO I-64 EB (EXIT 3)	56
I-255	I-255 NB- 500' SOUTH OF RAMP TO I-255 EB (EXIT 20)	56
I-255	I-255 SB- 500' NORTH OF ENTRANCE TO I-255 C/D LANES TO I-64	56
IL 157	IL 157 SB- AT ENTRANCE RAMP TO I-64 WB	56
IL 157	IL 157 NB- AT ENTRANCE RAMP TO I-64 WB	56
SUBTOTAL		504
LOCATION 2 (SN 060-0211) & LOCATION 3 (SN 060-0205)		
I-70	I-70 EB- 500' NORTH OF RAMP TO I-64 EB (EXIT 3)	63
I-70	I-70 WB- 500' EAST OF THE 3I INTERCHANGE RAMPS	63
I-55	I-55/64 EB- 500' WEST OF I-64 & I-55 SPLIT (EXIT 3)	63
I-55	I-55 SB- 500' NORTH OF THE 3-I INTERCHANGE RAMPS	63
I-55	I-55 SB- 500' NORTH OF THE IL 159 EXIT (EXIT 15B)	63
I-255	I-255 NB- 500' SOUTH OF RAMP TO I-255 EB (EXIT 20)	63
IL 157	IL 157 NB- AT ENTRANCE RAMP TO I-55/70 WB	63
IL 157	IL 157 SB- AT ENTRANCE RAMP TO I-55/70 WB	63
IL 157	IL 157 ENTRANCE RAMP TO I-55/70 WB- 500' FROM MERGE POINT W/ I-55/70 WB	63
SUBTOTAL		567
TOTAL		1071

NOTE: IT IS ASSUMED THAT A TOTAL OF NINE (9) CMS SIGNS ARE REQUIRED SINCE CONSTRUCTION ACTIVITIES CANNOT BE PERFORMED CONCURRENTLY.

CONCRETE BARRIER SCHEDULE				
LOCATION	TEMPORARY CONCRETE BARRIER FOOT	RELOCATE TEMPORARY CONCRETE BARRIER FOOT	IMPACT ATTENUATORS, TEMPORARY (NON- REDIRECTIVE), TL 3 EACH	IMPACT ATTENUATORS, RELOCATE (NON- REDIRECTIVE), TL 3 EACH
STAGE 1				
TAPER	150.0			
TANGENT	287.5		1	
SUBTOTAL	437.5			
STAGE 2				
TAPER		150.0		
TANGENT		287.5		1
SUBTOTAL		437.5		
STAGE 3				
TAPER		437.5		
TANGENT	1525.0			1
SUBTOTAL	1525.0	437.5		
STAGE 4				
TAPER		437.5		
TANGENT	1287.5			1
SUBTOTAL	1287.5	437.5		
EB CD LANES (NOT SHOWN ON PLANS)				
TAPER	150.0	150.0		
TANGENT	287.5	287.5	1	1
SUBTOTAL	437.5	437.5		
TOTAL	3687.5	1750.0	2	4

△ REV 6-6-17

*55/70/64
 **60-(6,7)BP-1, 82-(3,4)BP-1
 ***MADISON, ST. CLAIR

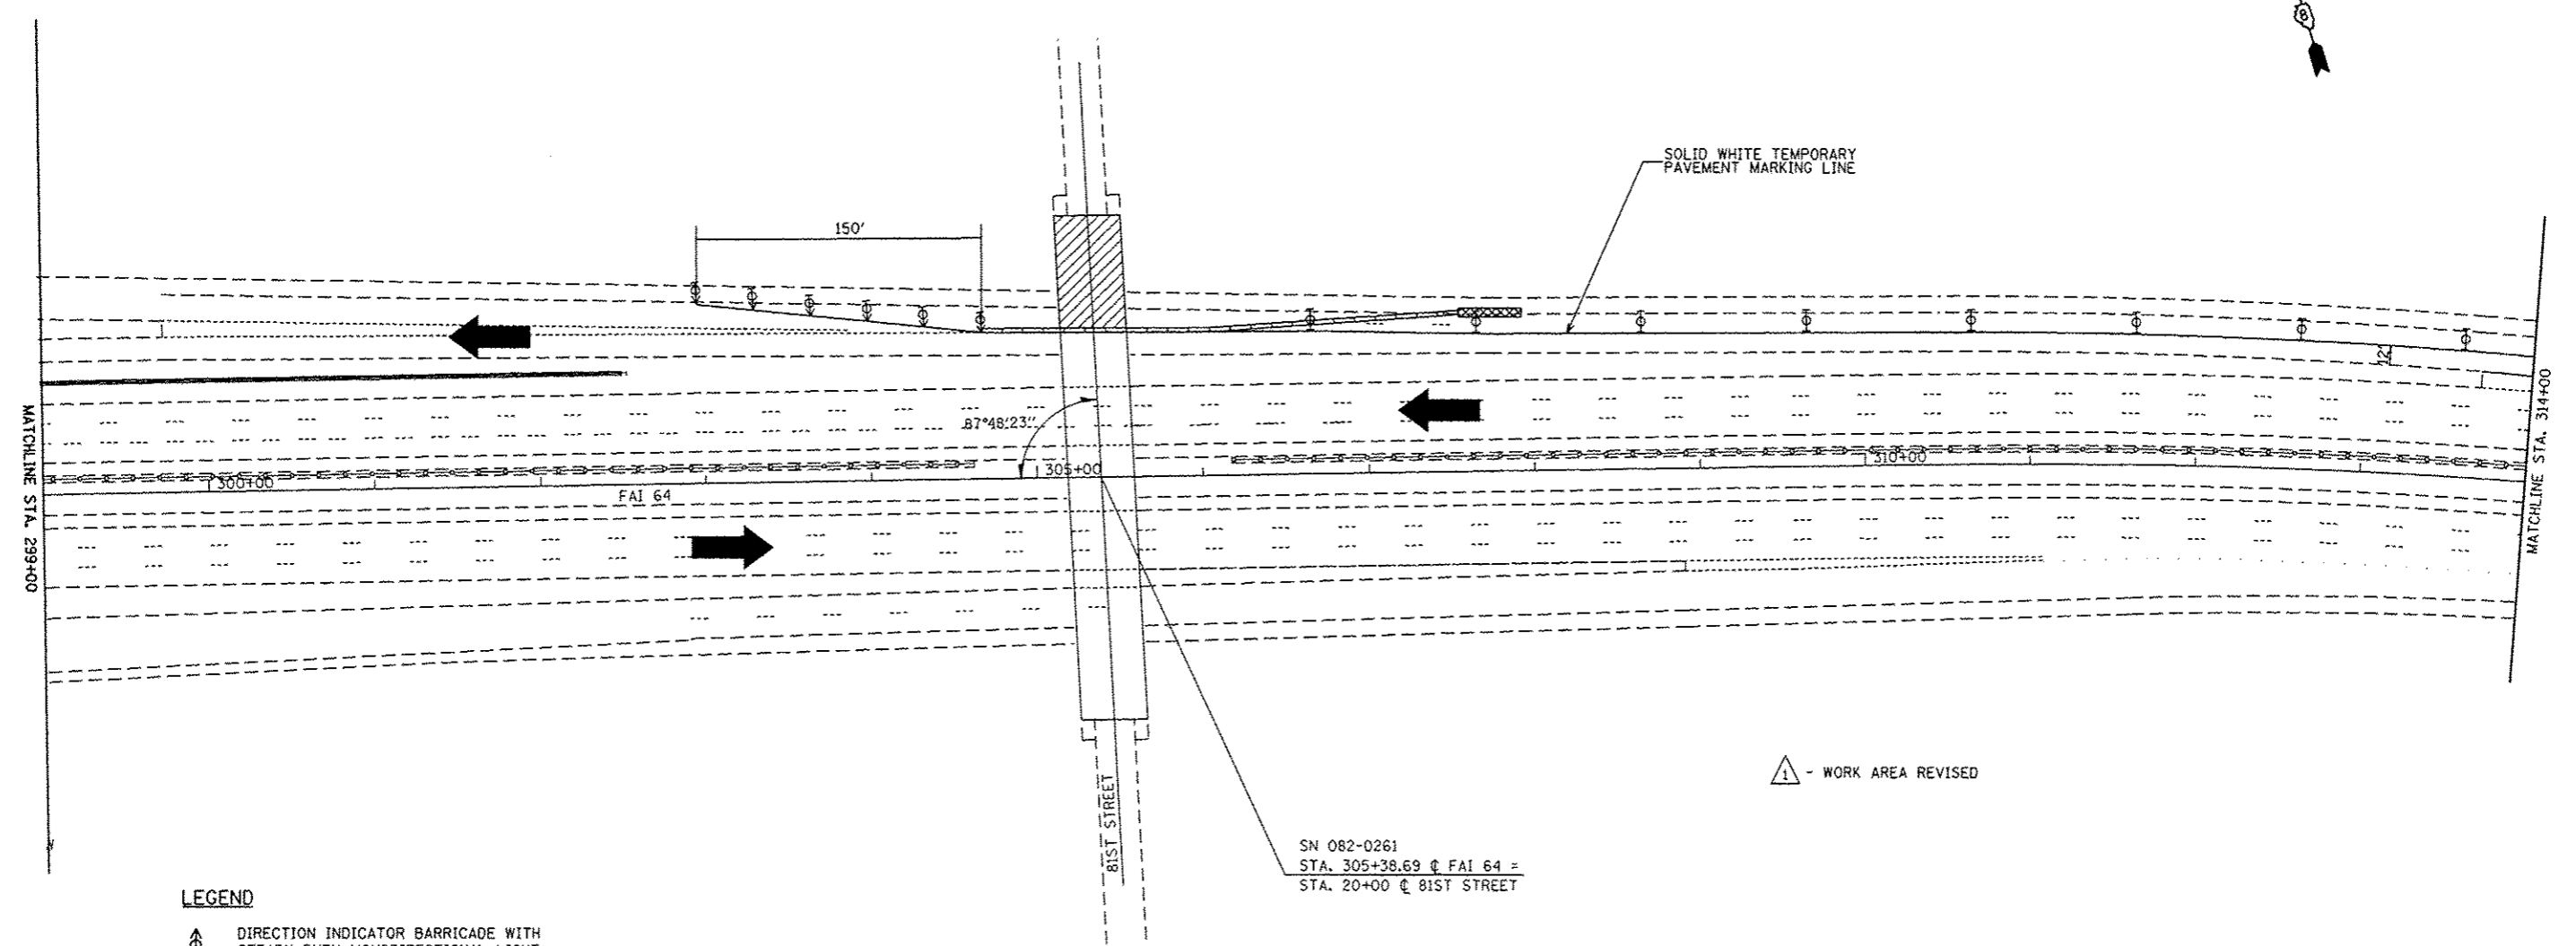

△ - WORK AREA REVISED


- LEGEND**
- DIRECTION INDICATOR BARRICADE WITH STEADY BURN MONODIRECTIONAL LIGHT
 - WORK AREA
 - DRUM OR TYPE II BARRICADE WITH STEADY BURNING LIGHT
 - TRAFFIC DIRECTION ARROW
 - ADVANCE ARROW BOARD
 - TEMPORARY CONCRETE BARRIER
 - IMPACT ATTENUATOR
 - TYPE III BARRICADE

NOTES:

1. APPLICABLE HWY STDS - 701400, 701401, 701411, 701451, AND 704001
2. SEE TRAFFIC CONTROL DETAIL SHEET FOR INFORMATION AND TRAFFIC CONTROL ITEMS NOT SHOWN FOR LANE WEAVE.
3. THE CONTRACTOR WILL BE ALLOWED THE OPTION OF USING SAND MODULE IMPACT ATTENUATORS FOR THIS PROJECT.

△ REV 6-6-17
 •55/70/64
 ••60-(6,7)BP-1, 82-(3,4)BP-1
 •••MADISON, ST. CLAIR

FILE NAME =	USER NAME = merrin	DESIGNED -	REVISED - △ 6-5-17	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	TRAFFIC CONTROL STAGE 2			F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
pu\llob4e810nteg.illinois.gov\1007\Documents\1007\Office\Distrot 8\Projects\0874\PRON\0874\GADshasta\0874\sh-plan.dgn		CHECKED -	REVISED -		SCALE: 50:1	SHEET 1	OF 3	SHEETS	STA.	TO STA.	CONTRACT NO. 76K13	
#MODELNAME#	PLOT SCALE = 1/8" = 100'	CHECKED -	REVISED -									
	PLOT DATE = 6/5/2017	DATE -	REVISED -									

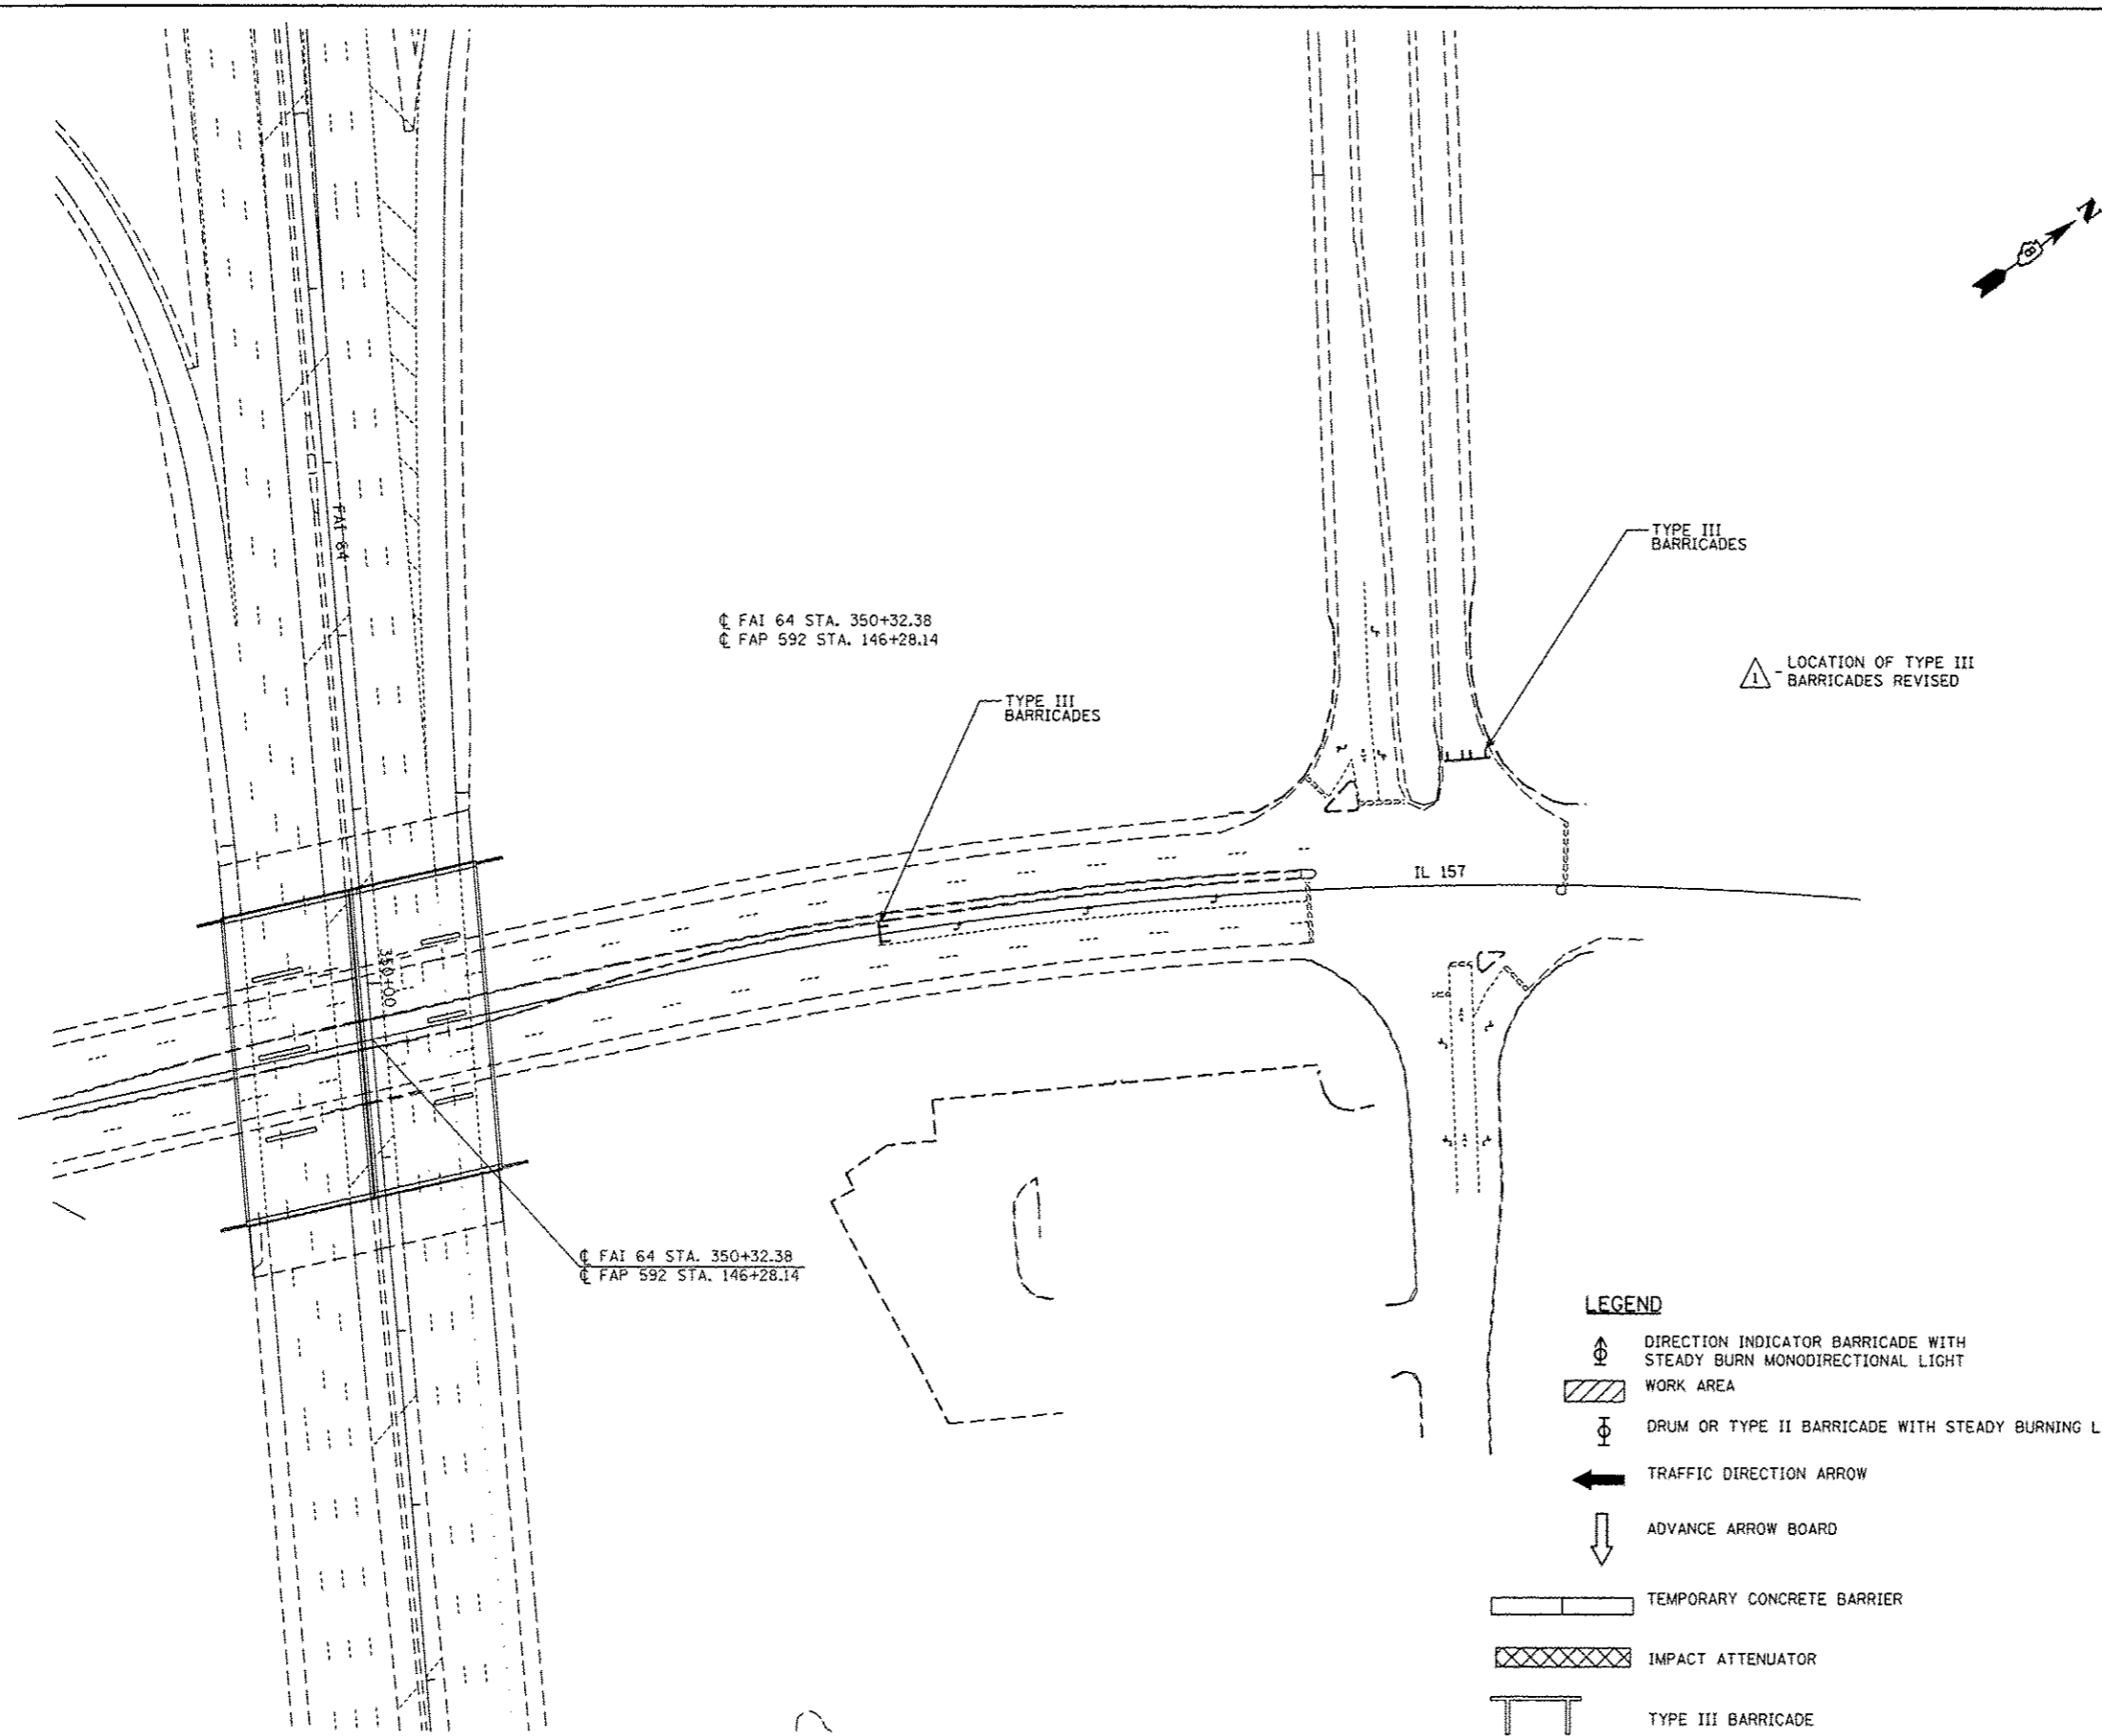

☉ FAI 64 STA. 350+32.38
 ☉ FAP 592 STA. 146+28.14

TYPE III BARRICADES









TYPE III BARRICADES

△ LOCATION OF TYPE III BARRICADES REVISED

IL 157

☉ FAI 64 STA. 350+32.38
 ☉ FAP 592 STA. 146+28.14

LEGEND

-  DIRECTION INDICATOR BARRICADE WITH STEADY BURN MONODIRECTIONAL LIGHT
-  WORK AREA
-  DRUM OR TYPE II BARRICADE WITH STEADY BURNING LIGHT
-  TRAFFIC DIRECTION ARROW
-  ADVANCE ARROW BOARD
-  TEMPORARY CONCRETE BARRIER
-  IMPACT ATTENUATOR
-  TYPE III BARRICADE

NOTES:
 1. APPLICABLE HWY STDS - 701400, 701401, 701411, 701451, AND 704001
 2. SEE TRAFFIC CONTROL DETAIL SHEET FOR INFORMATION AND TRAFFIC CONTROL ITEMS NOT SHOWN FOR LANE WEAVE.
 3. THE CONTRACTOR WILL BE ALLOWED THE OPTION OF USING SAND MODULE IMPACT ATTENUATORS FOR THIS PROJECT.

*55/70/64
 **60-(6,7)BP-1, 82-(3,4)BP-1
 ***MADISON, ST. CLAIR

FILE NAME =	USER NAME =	DESIGNED -	REVISED -
p:\11\04EBID\INTEG\illinois.gov\FIDOT\Documents\1007\Office\District\B\Projects\087\DRAWING\04\Sheet\0876K13-ht-plan.d	monmn	-	6-5-17
#MODELNAME#	PLOT SCALE = 100.0000' / in.	CHECKED -	REVISED -
	PLOT DATE = 6/5/2017	DATE -	REVISED -

**STATE OF ILLINOIS
 DEPARTMENT OF TRANSPORTATION**


**TRAFFIC CONTROL
 STAGE 3**

SCALE: 50:1 SHEET 8 OF 8 SHEETS STA. TO STA.

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
*	**	***	38	300
CONTRACT NO. 76K13				
ILLINOIS FED. AID PROJECT				

△ REV 6-6-17

STA. 0+00 @ RAMP E =
 STA. 299+73.13, 122' LT. @ FAI 64

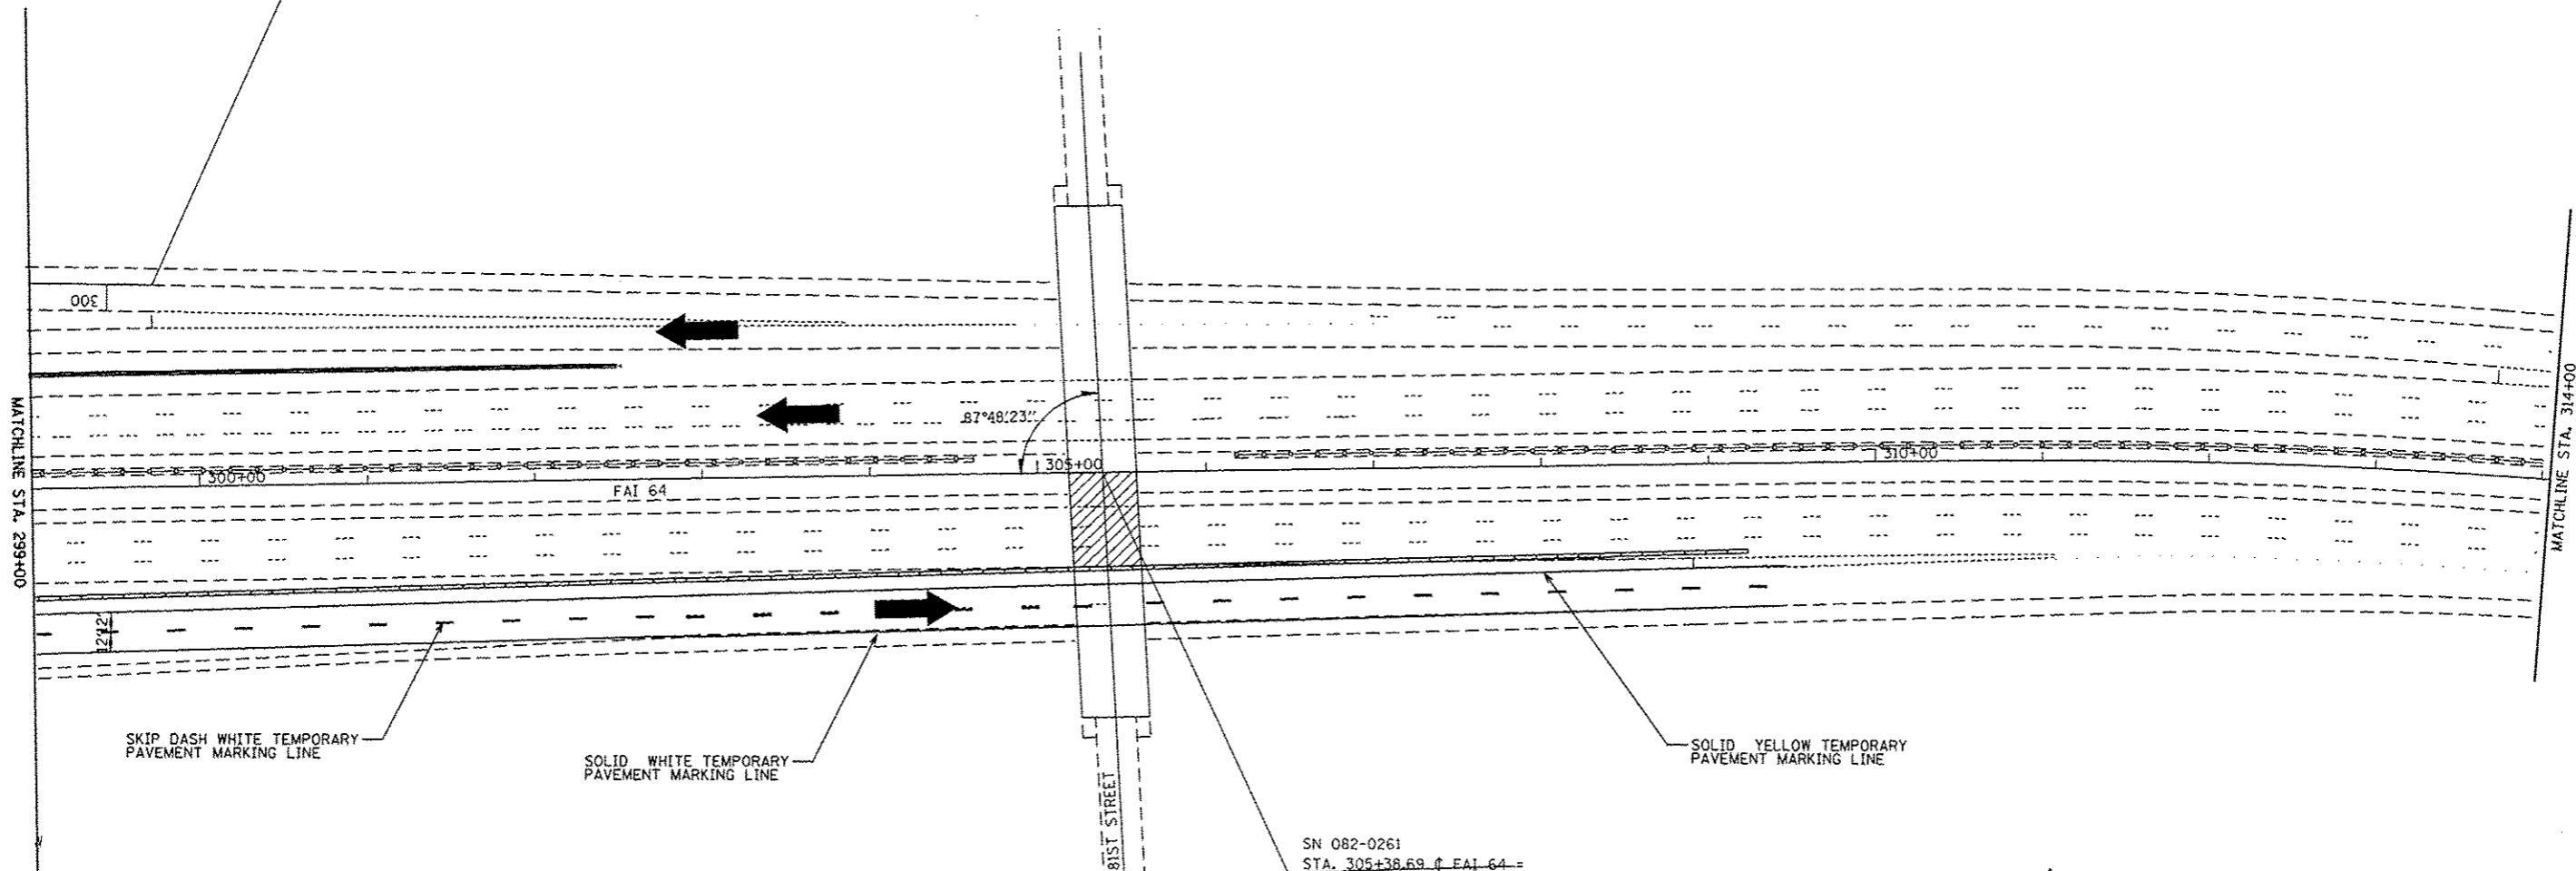

SKIP DASH WHITE TEMPORARY PAVEMENT MARKING LINE
 SOLID WHITE TEMPORARY PAVEMENT MARKING LINE
 SOLID YELLOW TEMPORARY PAVEMENT MARKING LINE

LEGEND

- DIRECTION INDICATOR BARRICADE WITH STEADY BURN MONODIRECTIONAL LIGHT
- WORK AREA
- DRUM OR TYPE II BARRICADE WITH STEADY BURNING LIGHT
- TRAFFIC DIRECTION ARROW
- ADVANCE ARROW BOARD
- TEMPORARY CONCRETE BARRIER
- IMPACT ATTENUATOR
- TYPE III BARRICADE

NOTES:
 1. APPLICABLE HWY STDS - 701400, 701401, 701411, 701451, AND 704001
 2. SEE TRAFFIC CONTROL DETAIL SHEET FOR INFORMATION AND TRAFFIC CONTROL ITEMS NOT SHOWN FOR LANE WEAVE.
 3. THE CONTRACTOR WILL BE ALLOWED THE OPTION OF USING SAND MODULE IMPACT ATTENUATORS FOR THIS PROJECT.

- WORK AREA REVISED

•55/70/64
 ••60-(6,7)BP-1, 82-(3,4)BP-1
 •••MADISON, ST. CLAIR

FILE NAME *	USER NAME = nmnntn	DESIGNED -	REVISED - 6-5-17
pw:\IL04EBIDINTEG.illinois.gov\FWIDOT\Documents\IDOT Offices\Districts\B\Projects\087\DRAWING\GASheets\0876K13-shr-plan.dwg	PROJECT = 0876K13	CHECKED -	REVISED -
#MODELNAME#	PLOT DATE = 6/5/2017	DATE -	REVISED -

**STATE OF ILLINOIS
 DEPARTMENT OF TRANSPORTATION**

**TRAFFIC CONTROL
 STAGE 4**

SCALE: 50:1	SHEET 6 OF 6 SHEETS	STA. TO STA.	F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
			*	**	***	38	30J
						CONTRACT NO. 76K13	
ILLINOIS FED. AID PROJECT							

REV 6-6-17