

NOTES

Detail I - With Bar Splicer or Couplers:

Connect one (1) $1'' \times 7^l 4'' \times ''W''$ steel P_l to the top layer of couplers with $2^{-5}g'' \phi$ bolts screwed to coupler at approximate Q_l of each barrier panel.

Detail II - With Extended Reinforcement Bars:
Connect one (1) I" x 7½" x "W" steel £ to
the concrete slab or concrete wearing surface with
2-5g" \$\phi\$ Expansion Anchors or cast in place inserts
spaced between the top layer of reinforcement at
approximate \$\mathbb{L}\$ of each barrier panel.


Cost of anchorage is included with Temporary Concrete Barrier. The 1" x 7^l_4 " x "W" plate shall not be removed until stage II construction forms and all reinforcement bars are in place and the concrete is ready to be placed.


SECTIONS THRU SLAB OR DECK BEAM

*** Dimension shown is minimum required embedment into concrete.

If hot-mix asphalt wearing surface is present, minimum embedment shall be in addition to wearing surface depth.

**** If existing deck beam is to remain in place after stage construction, embedment shall only be into wearing surface and not into existing deck beam concrete.

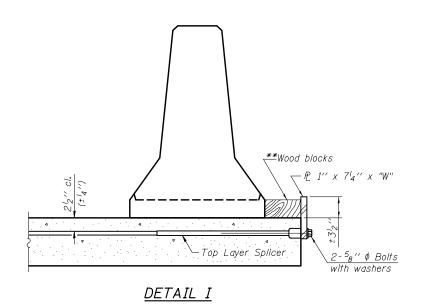

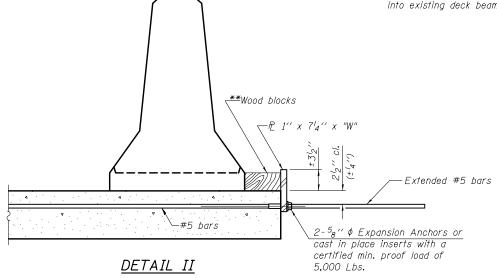

EXISTING DECK BEAM

Top bars
spacing
3" 3" Detail II

E 1" x 12" Notch

STEEL RETAINER P 1" x 74" x "W"

* Required only with Detail II

** Wood blocks may be omitted when required to provide minimum stage traffic lane width. When the wood blocks are omitted, the concrete barrier shall be in direct contact with the steel retainer plate.

"W" = Top bars spacing + 4"

DESIGNED - Michael D. Rolape	EXAMINED Thomas Romanalaki	DATE - OCTOBER 5, 2011	MODIFIED TEMPORARY CONCRETE BARRIER FOR STAGE CONSTRUCTION	F.A.P. SECTION	COUNTY TOTAL SHEET SHEETS NO.
CHECKED - Nicholas R. Barnett DRAWN - h.t. duong	PASSED PASSED	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	STRUCTURE NO. 057-0244	315 121 BR-2	MCLEAN 144 52
CHECKED - MDR/NRB	ENGINEER OF BRIDGES AND STRUCTURES		SHEET NO. 4 OF 30 SHEETS	ILLINOIS FED. A	AID PROJECT