

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION




F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
VAR	DIST 8 ITS 2024-1	VARIOUS	3	1
		ILLINOIS	CONTRACT NO. 76R54	

- INDEX OF SHEETS:**
 1 - COVER SHEET
 2 - SUMMARY OF QUANTITIES
 3 - GENERAL NOTES/WORK ORDER FORM

**PROPOSED
HIGHWAY PLANS**

**VARIOUS ROUTES
SECTION DIST 8 ITS 2024-1
MAINTAIN & SERVICE
ALL ITS EQUIPMENT
VARIOUS COUNTIES**

C-98-129-22

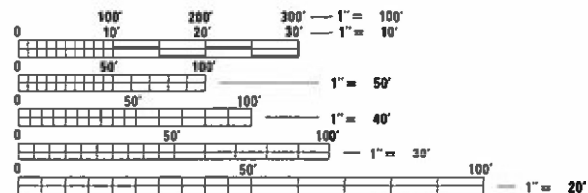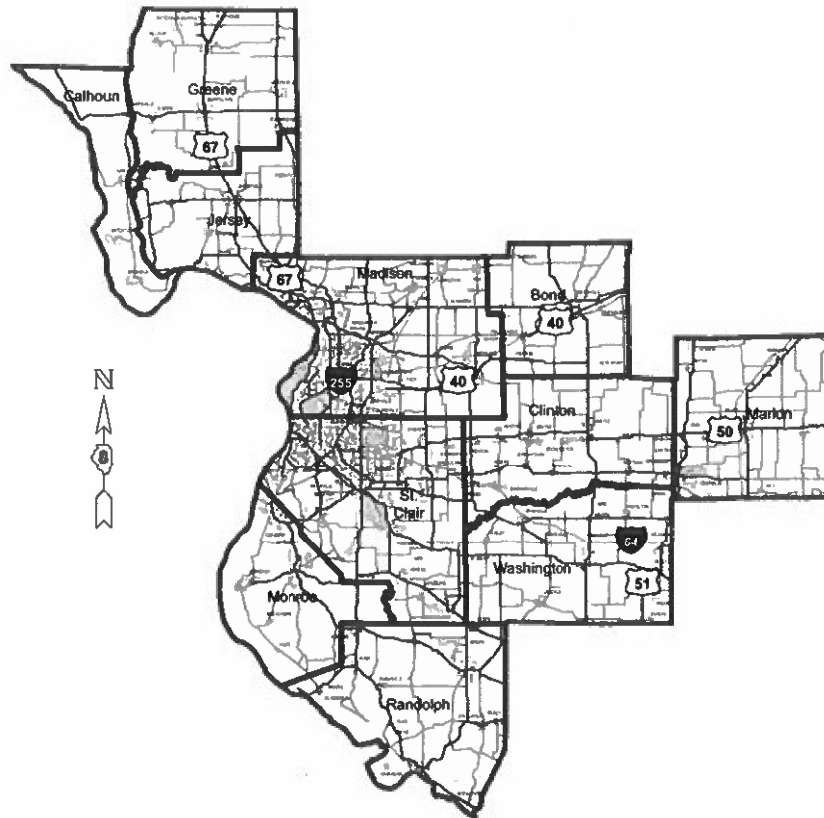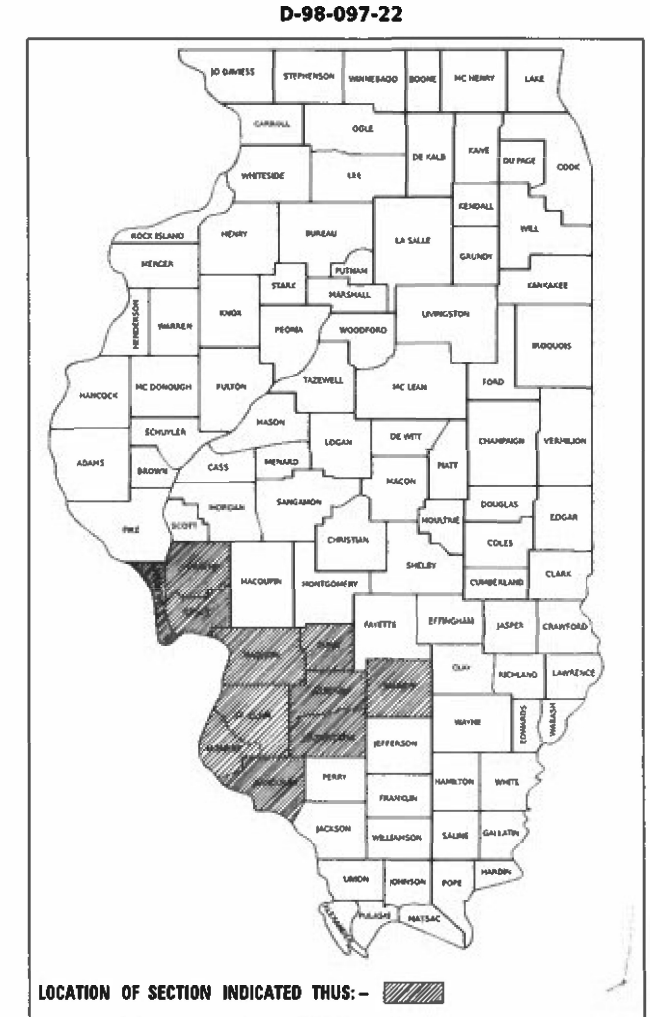

FULL SIZE PLANS HAVE BEEN PREPARED USING STANDARD ENGINEERING SCALES. REDUCED SIZED PLANS WILL NOT CONFORM TO STANDARD SCALES. IN MAKING MEASUREMENTS ON REDUCED PLANS, THE ABOVE SCALES MAY BE USED.

J.U.L.I.E.
JOINT UTILITY LOCATION INFORMATION FOR EXCAVATION
1-800-892-0123
OR 811

PROJECT ENGINEER: CHERYL KEPLAR
PROJECT MANAGER: DANIEL HOPKINS

CONTRACT NO. 76R54

GROSS LENGTH = x.xx FT. = x.xxx MILE
NET LENGTH = x.xx FT. = x.xxx MILE

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

SUBMITTED March 1 20 23
Kyle H. P. REGIONAL ENGINEER
May 12, 2023 John A. Etk
ENGINEER OF DESIGN AND ENVIRONMENT
May 12, 2023 Stephen M. Smith
DIRECTOR OF HIGHWAYS PROJECT IMPLEMENTATION

**PRINTED BY THE AUTHORITY
OF THE STATE OF ILLINOIS**

CONSTR. CODE

100% STATE

NONE

0021

URBAN

CODE NO.	ITEM	UNIT	TOTAL QUANTITY	
XP000001	JOURNEYMAN ELECTRICIAN	HOUR	2100	2100
XP000002	APPRENTICE ELECTRICIAN	HOUR	250	250
XP000009	PICK-UP TRUCK	HOUR	1800	1800
XP000012	ARROWBOARD (TRAILER MOUNTED)	HOUR	100	100
X0327587	ITS EQUIPMENT CONTROL TECHNICIAN	HOUR	1500	1500
Z0076604	TRAINEES TRAINING PROGRAM GRADUATE	HOUR	500	
X0327983	ITS EQUIPMENT CONTROL TECHNICIAN REMOTE SUPPORT	HOUR	170	170

Ø 0042

MODEL: S00 (Sheet)
 FILE NAME: P:\Illinois\pw_bentley.com\PWIDOT\Documents\DOT_Offices\District 9\GRD Projects\087654\CAD\Drawn\CADsheets\087654-S00.dgn

REV. - MS

USER NAME = Daniel.Hopkins	DESIGNED - _____	REVISED - _____
	DRAWN - _____	REVISED - _____
PLOT SCALE = 0.08333317 ' / in.	CHECKED - _____	REVISED - _____
PLOT DATE = 2/28/2023	DATE - _____	REVISED - _____

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

SUMMARY OF QUANTITIES

SCALE SIZE 1 = 1 SHEET 0 OF 1 SHEETS STA. ___+___ TO STA. ___+___

F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
VAR	DIST 8 ITS 2024-1	VARIOUS	3	2
			CONTRACT NO. 76R54	
		ILLINOIS	FED. AID PROJECT	

GENERAL NOTES

1. THE LOCATIONS OF THE REPAIR AREAS SHALL BE DETERMINED BY THE ENGINEER.
2. NO MATERIAL SHALL BE LEFT ON OR NEAR THE ROADWAY DURING NON- WORKING HOURS.
3. ANY NECESSARY TRAFFIC CONTROL WILL BE PROVIDED BY THE CONTRACTOR; APPROPRIATE STANDARDS ARE LISTED BELOW.
4. ILLINOIS STATE LAW REQUIRES A 48-HOUR NOTICE TO BE GIVEN TO UTILITIES BEFORE DIGGING. FIELD MARKING OF FACILITITES MAY BE OBTAINED BY CONTACTING J.U.L.I.E. (1-800-892-0123 OR 811) OR FOR NON-MEMBERS THE UTILITY COMPANY DIRECTLY.
5. A FLAGGER SHALL BE REQUIRED AT ALL TIMES WHEN WORKERS OR EQUIPMENT ARE ENCROACHING ON THE LANE OF TRAFFIC.
6. WHEN NO WORK IS BEING PERFORMED, THE FLAGGERS WILL NOT BE REQUIRED. IF THE FLAGGERS ARE NOT PRESENT, THE FLAGGER SIGNS SHALL BE REMOVED OR COVERED.
7. ALL EXCAVATION ADJACENT TO THE EDGE OF PAVEMENT SHALL BE PROTECTED WITH THE EXTENDED LEG BARRICADES AND THE APPROPRIATE LIGHTS.
8. 45 & 55 MPH SIGNS ARE INCLUDED IN ALL INTERSTATE LANE CLOSURES. IF THE LANE CLOSURE DURATION IS LESS THAN 4 HOURS, THE 45 & 55 MPH SIGNS ARE NOT REQUIRED.
9. ANY WORK ORDER MAY BE CANCELLED AT THE ENGINEER'S DISCRETION.
10. NO OVERNIGHT LANE CLOSURES WILL BE ALLOWED.

HIGHWAY STANDARDS

000001-08	701001-02	701400-11	701451-05
001006	701006-05	701401-13	701456-05
	701106-02	701406-13	701601-09
	701201-05	701421-08	701606-10
	701206-05	701422-10	701701-10
	701301-04	701446-11	701901-08



Work Order ITS 1

Requested By: _____ Date: _____ Time: _____

Assigned To: _____ Received From: _____

Estimated Cost: _____

Location: _____

Problem: _____

Ref/Accident #: _____ Claim #: _____

Remarks: _____

Completed By: _____ Date/TimeCompleted: _____

REV. - MS

MODEL - GEN NOTES WORK ORDER (Sheet)
FILE NAME: P:\Illinois-Transportation\DOT-Office\District 8\8RD-Projects\0876854\CADD\Draw/CADsheets\0876854-500.dgn

USER NAME = Daniel.Hopkins	DESIGNED - _____	REVISED - _____
	DRAWN - _____	REVISED - _____
PLOT SCALE = 0.08333317 ' / in.	CHECKED - _____	REVISED - _____
PLOT DATE = 1/20/2023	DATE - _____	REVISED - _____

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

GENERAL NOTES/ HIGHWAY STANDARDS/
TYPICAL WORK ORDER FORMS

SCALE: SIZE 1 = 1 SHEET 0 OF 1 SHEETS STA. ____+____ TO STA. ____+____

F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
VAR	DIST 8 ITS 2024-1	VARIOUS	3	3
			CONTRACT NO. 76R54	
ILLINOIS FED. AID PROJECT				