

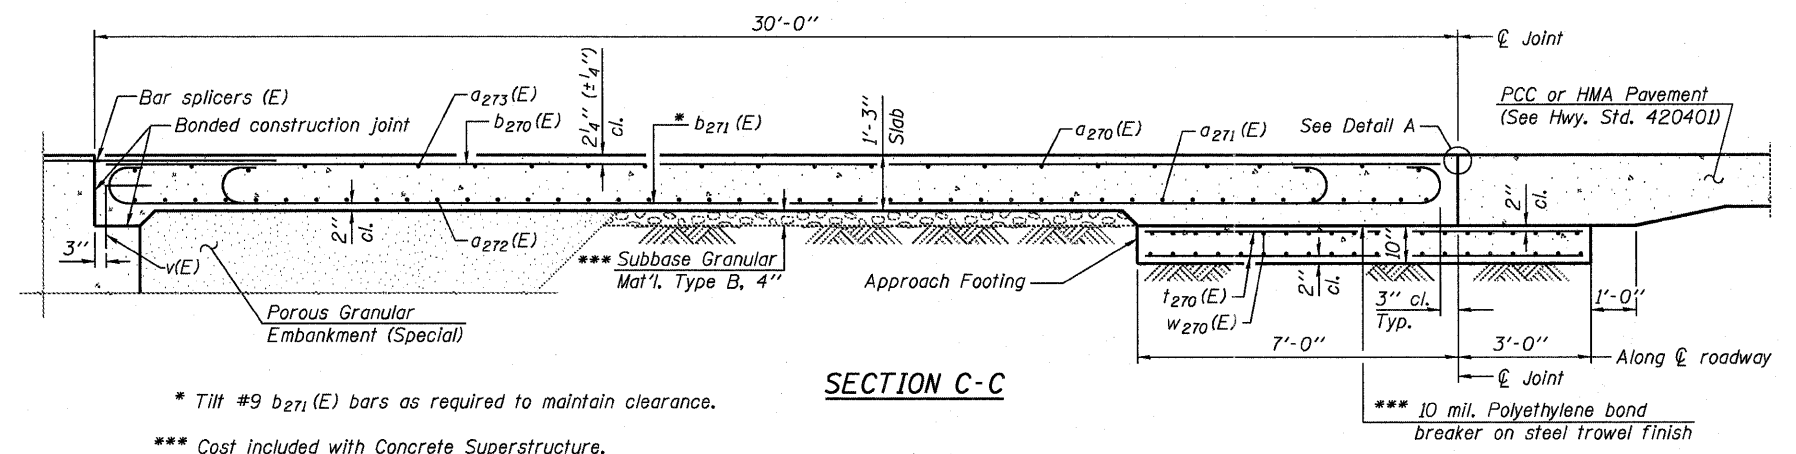


Notes:
 See sheet S-81 for Detail A.
 Approach slab and parapet concrete shall be paid for as Concrete Superstructure.
 Approach footing concrete shall be paid for as Concrete Structures.
 Reinforcement shall be paid for as Reinforcement Bars, Epoxy Coated.
 For v(E) bar details, see sheet S-140.
 The approach footing maximum applied service bearing pressure (Qmax) = 2.0 ksf.
 Cost of excavation for approach footing included with Concrete Structures.
 For Porous Granular Embankment (Special) and drainage treatment details, see sheet S-6.

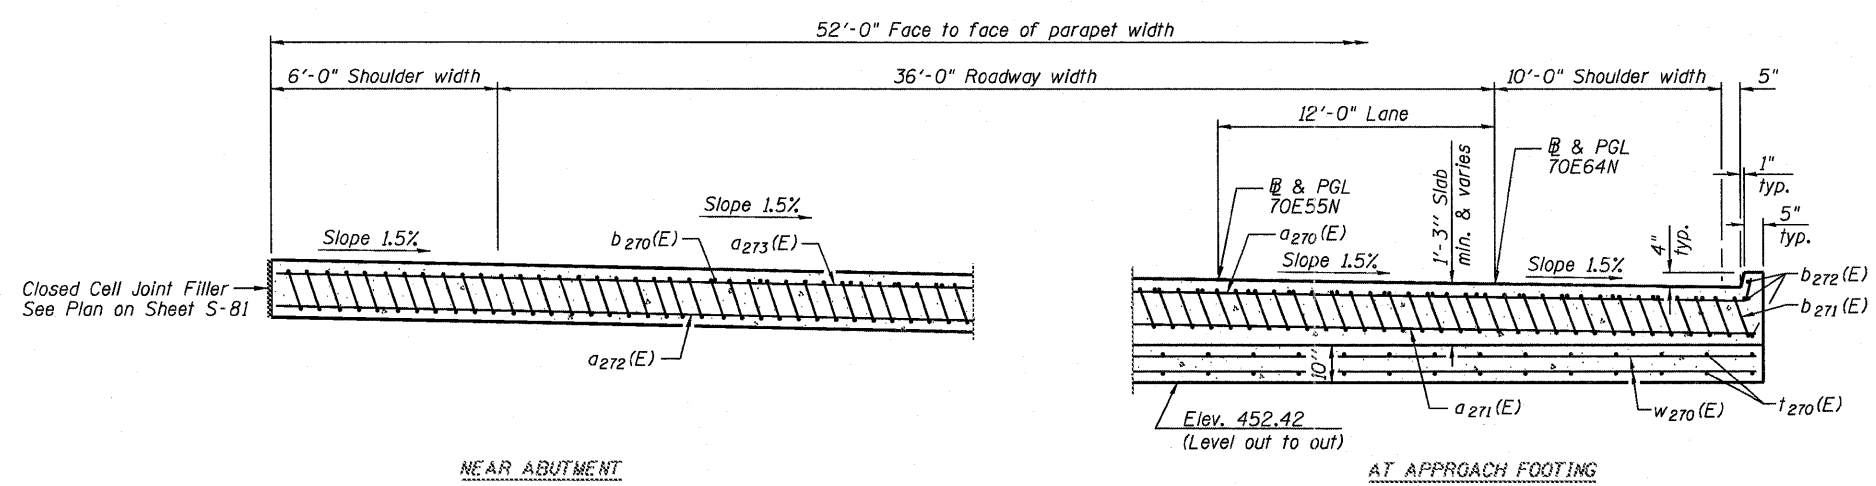


* Tilt #9 b271(E) bars as required to maintain clearance.
 *** Cost included with Concrete Superstructure.

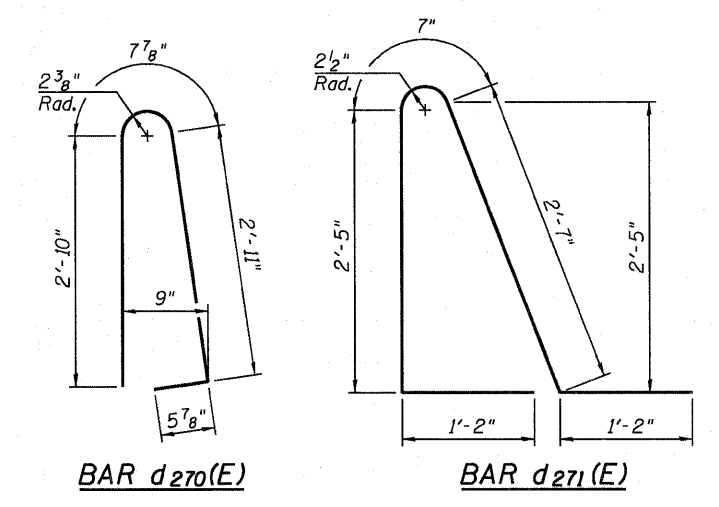


NEAR ABUTMENT

SECTION D-D
 (See Plan for dimensions not shown)


AT APPROACH FOOTING

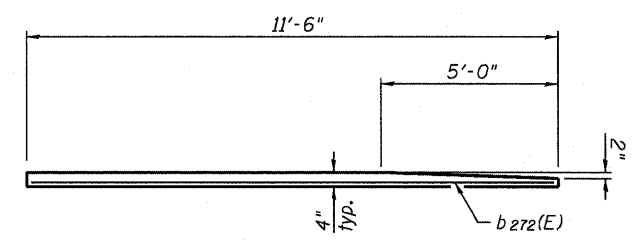


VIEW B-B

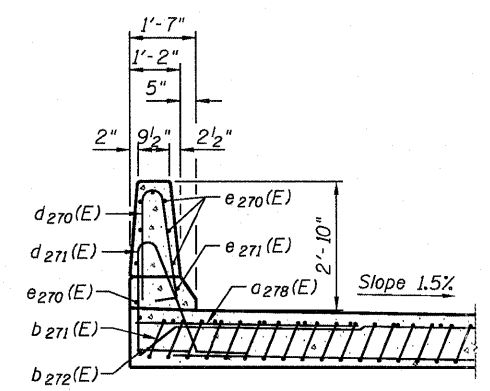


SECTION F-F

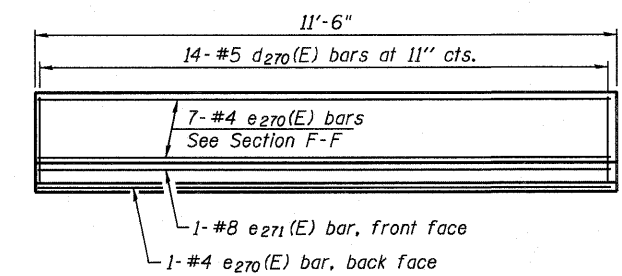

VIEW H-H

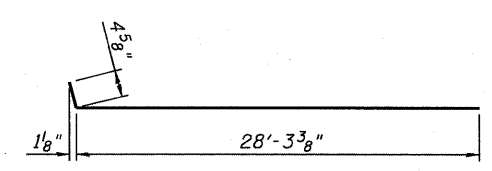

BAR a270(E)

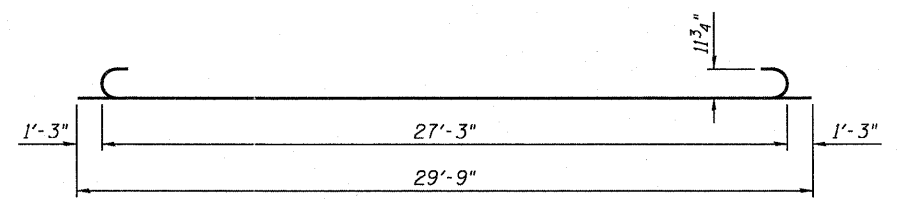

BAR b271(E)

BILL OF MATERIAL

Bar	No.	Size	Length	Shape
a270(E)	20	#4	28'-8"	U
a271(E)	36	#5	28'-9"	U
a272(E)	56	#5	27'-6"	U
a273(E)	30	#4	27'-2"	U
a278(E)	9	#6	6'-6"	U
b270(E)	42	#4	29'-8"	U
b271(E)	124	#9	29'-9"	U
b272(E)	4	#4	11'-2"	U
d270(E)	14	#5	6'-11"	U
d271(E)	14	#5	7'-11"	U
e270(E)	8	#4	11'-2"	U
e271(E)	1	#8	11'-2"	U
t270(E)	112	#4	9'-8"	U
w270(E)	80	#5	28'-9"	U
Concrete Superstructure		Cu. Yd.	80.6	
Concrete Structures		Cu. Yd.	16.8	
Reinforcement Bars, Epoxy Coated		Pound	20,540	
Bridge Deck Grooving		Sq. Yd.	169	
Protective Coat		Sq. Yd.	182	

D:\F1\0820322-0820324-76716-582-4\ppr\slab2-022.dgn