F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
94	*	COOK	860	666
STA. 2200+00.00		TO STA. 2362+00.00		
FED. ROAD DIST. NO.	ILLINOIS	FED. AID PROJECT		

* (1516.1, 1717 & 1818) R-8

62694

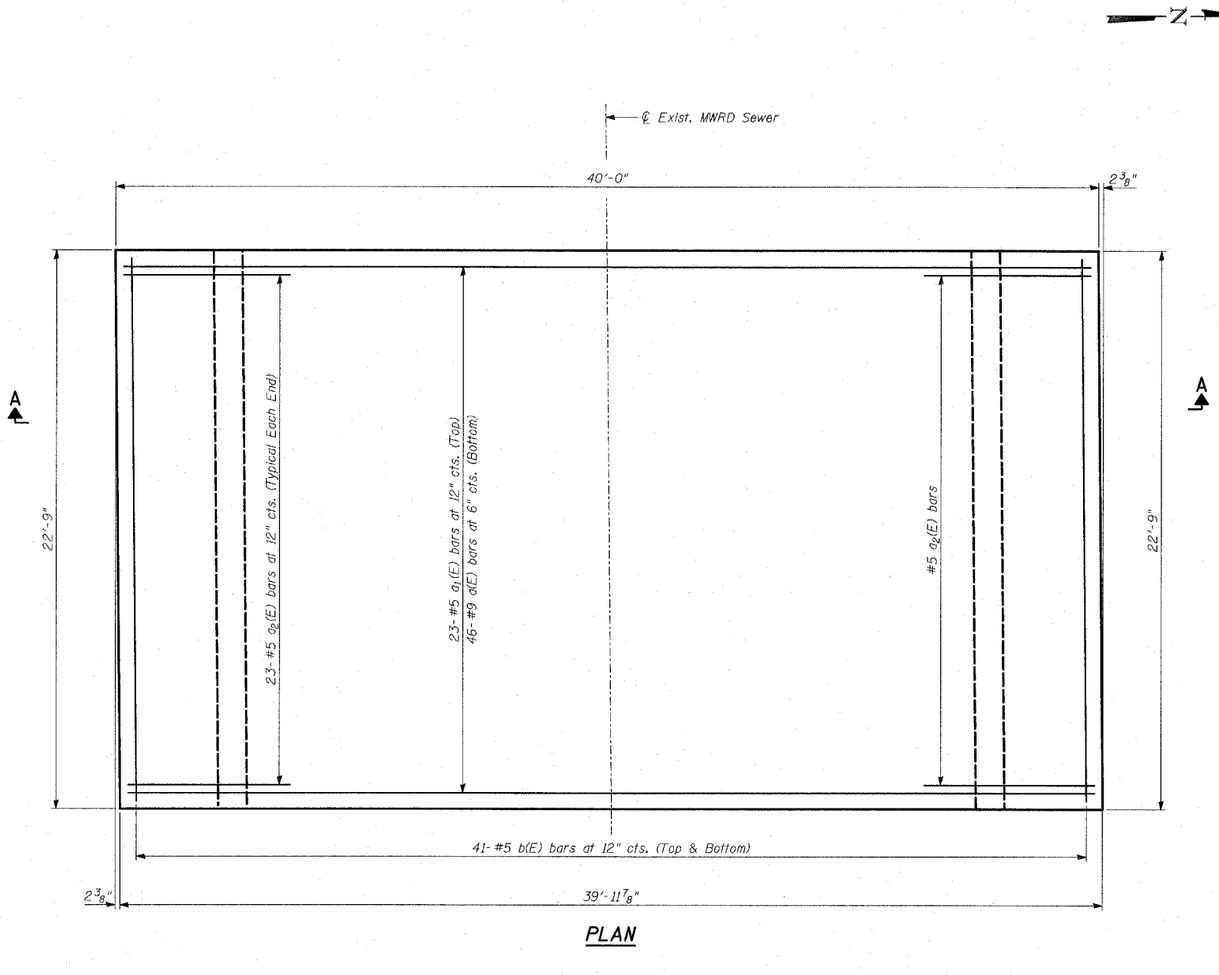

PLAN

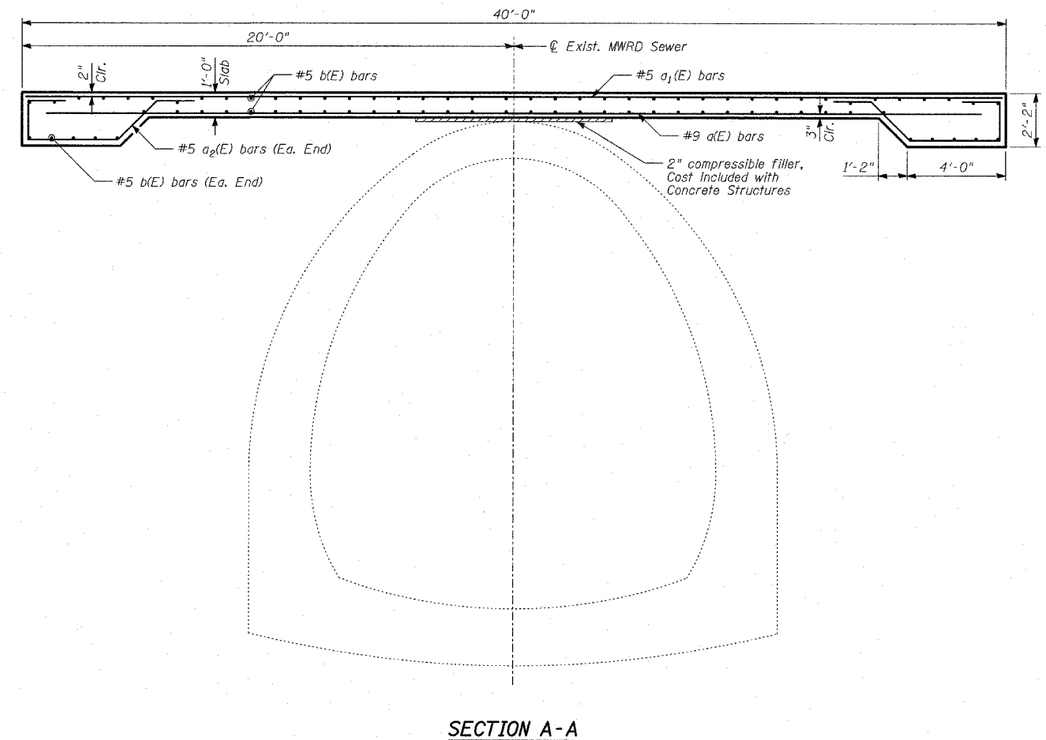

SECTION A-A

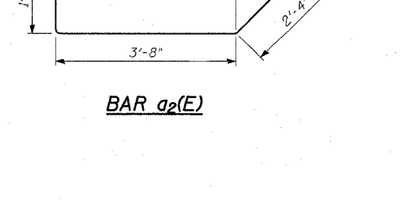

BAR a_2(E)

BILL OF MATERIAL

Bar	No.	Size	Length	Shape
a(E)	46	#9	39'-0"	
a_1(E)	23	#5	39'-8"	
a_2(E)	46	#5	10'-8"	
b(E)	82	#5	22'-5"	
Reinforcement Bars, Epoxy Coated			POUND	9,490
Concrete Structures			CU YD	43

Reinforcement bars designated (E) shall be epoxy coated.

SHEET 2 OF 2

REVISIONS	
NAME	DATE
REVISED	05/06/05

ILLINOIS DEPARTMENT OF TRANSPORTATION

F.A.I. 94 (DAN RYAN EXPRESSWAY)

PROTECTION SLAB DETAILS FOR EXISTING 16'-6" x 18'-4" MWRD STORM SEWER AT 72ND ST.

S.N.
SCALE:
DATE: MARCH 18, 2005

DESIGNED BY: TD, DJR
DRAWN BY: DJR
CHECKED BY: TD, MI

TYLIN INTERNATIONAL