


**LEGEND**

	SIDEWALK REMOVAL
	PAVEMENT REMOVAL
	DRIVEWAY PAVEMENT REMOVAL
	ADJUST WATER METER PIT FRAME AND LID
	ADJUST WATER VALVE OR CURB STOP BOX LID

- DEMOLITION NOTES**
1. SAW CUTTING ALONG CURB AND GUTTER SHALL BE PERFORMED ALONG THE EDGE OF THE GUTTER FLAG OR ALONG THE BACK OF CURB.
  2. ALL EXISTING LIGHT POLES TO BE REMOVED BY OTHERS UNLESS OTHERWISE NOTED.

LOCATION	DRIVEWAY PAVEMENT REMOVAL SQ YD	SIDEWALK REMOVAL SQ FT	PAVEMENT REMOVAL SQ YD
Rt 30+27.4 to 30+42.4			4
Rt 30+27.4 to 31+32.3		1260	
Rt 31+27.2 to 31+57.8	46		
Rt 31+52.7 to 32+57.1		1030	
Lt 30+47.1 to 31+32.3		812	
Lt 31+27.0 to 31+52.5	21		
Lt 31+48.4 to 32+57.8		1089	
Lt 32+43.5 to 32+57.8			3
Rt 32+43.5 to 32+57.1			4
Lt 32+87.0 to 33+02.2			3
Lt 32+90.3 to 36+88.1		1236	
<b>Total</b>	<b>67</b>	<b>5397</b>	<b>14</b>

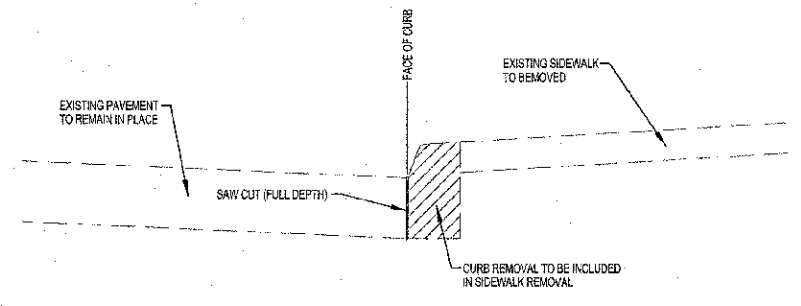

**CURB REMOVAL DETAIL**  
LONGITUDINAL WITH SIDEWALK